


## OMX-01HMHM0001 HDBaseT 4K HDMI Extender Set

### INSTALLATION & SPECIFICATIONS

**Transmitter**

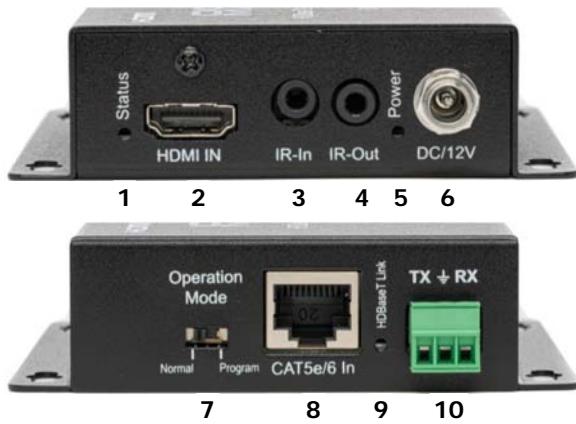


- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>1 HDMI LED Indicator</li> <li>2 HDMI Input Port</li> <li>3 IR-In Port-Connect IR RX Cable</li> <li>4 IR-Out Port-Connect IR TX Cable</li> <li>5 Power LED Indicator</li> <li>6 Plug in AC Power Supply</li> </ul> | <ul style="list-style-type: none"> <li>7 Operation Mode                             <ul style="list-style-type: none"> <li>• Normal-default setting</li> <li>• Program-factory use only</li> </ul> </li> <li>8 CAT5e/6 Output</li> <li>9 HDBaseT LED Indicator</li> <li>10 RS232 3 Pin Connection</li> </ul> |
|--|--|

**Receiver**



- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>1 HDMI LED Indicator</li> <li>2 HDMI Output Port</li> <li>3 IR-In Port-Connect IR RX Cable</li> <li>4 IR-Out Port-Connect IR TX Cable</li> <li>5 Power LED Indicator</li> </ul> | <ul style="list-style-type: none"> <li>7 Operation Mode                             <ul style="list-style-type: none"> <li>• Normal-default setting</li> <li>• Program-factory use only</li> </ul> </li> <li>8 CAT5e/6 Input</li> <li>9 HDBaseT LED Indicator</li> <li>10 RS232 3 Pin Connection</li> </ul> |
|--|---|

### Typical Application

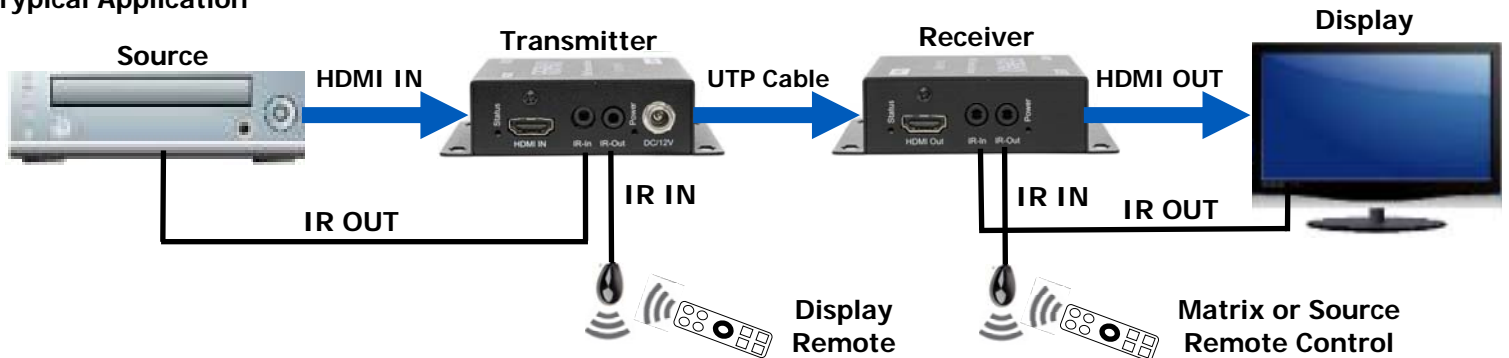

FEATURES
Extends Two-Way IR Signals
RS232 3-Pin Control Signal Transmission
Full HD support: 1080p@60Hz@48b/pixels, 4K@30Hz and 3D
Supports CEC Bypass
Transmission Distance: 1080P Up to 230 Feet, 4K up to 131 Feet
12V PoC
Rugged Black Powder-Coated Metal Enclosure
CE, FCC Certified

SPECIFICATIONS	
Compliance	HDMI 2.0, HDCP 2.2, HDCP 1.4
Video Formats	DTV/HDTV; 4K/1080P/1080i/720P/576P/480P/576i/480i & 3D
Input Video Signal	0.5-1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Output Audio Support	DTS-HD, Dolby-HD
Power Consumption	TX 2.5W, RX 5W
Dimensions (HxWxD)	4.1 x 2.8 x 1.0 in
Weight	TX 9.4 oz / RX 9.3 oz
Includes	(2) IR Blasters with Mounting Pads (2) RS232 Bare Wire 3 Pin Connectors (1) 12V/2A Power Supply

## SAFETY PRECAUTIONS

- To prevent fire or shock hazard, do not expose this equipment to dust or high humidity. Do not use in an unprotected outdoor installation or in areas classified as overly damp or wet.
- The installation temperature should be kept between 32°F to 140°F (0°C to 60°C). Avoid direct sunlight exposure or extreme changes of temperature over a short period of time.
- Do not place the unit on an unstable base and avoid heavy impact.
- Proper ventilation is required for permanent installation. Do not block or cover enclosure openings as they protect the unit from overheating.
- Prior to cleaning, turn the power off and unplug the unit from all connections. Use a damp cloth. Do not use liquid or aerosol cleaners.
- Do not overload outlets and extension cords as this may result in a risk of fire or electric shock.
- Enclosure entry is dangerous. Never push objects of any kind, including liquids, through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock.
- Do not open or service this unit yourself as opening or removing covers may expose you to dangerous voltage and other hazards.
- There are no user-serviceable parts inside the unit. If the unit requires service contact your authorized dealer, or authorized repair service company.

## Federal Communications Commission (FCC) Compliance Notices

### Class A Interference Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

### FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.