SIEMENS

Data sheet

3SU1100-4BL11-1NA0-Z Y15



RONIS key-operated switch, 22 mm, round, plastic, lock number SB30, with 2 keys, 3 switch positions I-O-II, latching, 10:30h/12h/13:30h, Key removal I+O+II, with holder, 1 NO, 1 NO, screw terminal, possible special locks: SB31, 421, 455, with laser labeling, upper case and lower case, always upper case at the beginning of the word

product brand name	SIRIUS ACT
product designation	Key-operated switches
design of the product	Complete unit
product type designation	3SU1
product line manufacturer's article number	Plastic, black, 22 mm
of included key	<u>3SU1950-0FB80-0AA0</u>
of supplied contact module	3SU1400-1AA10-1BA0, 3SU1400-1AA10-1BA0
 of supplied contact module at position 1 	<u>3SU1400-1AA10-1BA0</u>
 of supplied contact module at position 2 	<u>3SU1400-1AA10-1BA0</u>
 of the supplied holder 	<u>3SU1550-0AA10-0AA0</u>
 of the supplied actuator 	<u>3SU1000-4BL11-0AA0</u>
Enclosure	
shape of the enclosure front	round
number of command points	1
Actuator	
principle of operation of the actuating element	latching, 2x45° (10:30 h/12 h/13:30 h)
product extension optional light source	No
color of the actuating element	silver
material of the actuating element	metal
shape of the actuating element	Key
outer diameter of the actuating element	29.5 mm
marking of the actuating element	Any inscription, text in upper/lower case, all words begin with upper case letters
number of contact modules	2
number of switching positions	3
switch position for key distraction	 I+O+II
actuating angle	
clockwise	45°
anticlockwise	45°
lock make	RONIS
key number	SB30
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	plastic
color of the front ring	black
Holder	
material of the holder	Plastic

General technical data	
product function positive opening	No
product component light source	No
insulation voltage rated value	500 V
degree of pollution	3
type of voltage of the operating voltage	AC/DC
surge voltage resistance rated value	6 kV
protection class IP	IP66, IP67, IP69(IP69K)
• of the terminal	IP20
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	1, 2, 0, 01, 1, 10, 12, 10
 according to IEC 60068-2-27 	sinusoidal half-wave 15g / 11 ms
 for railway applications according to EN 61373 	Category 1, Class B
vibration resistance	
according to IEC 60068-2-6	10 500 Hz: 5g
 for railway applications according to EN 61373 	Category 1, Class B
operating frequency maximum	1 800 1/h
mechanical service life (switching cycles) typical	1 000 000
electrical endurance (switching cycles) typical	10 000 000
thermal current	10 A
reference code according to IEC 81346-2	S
continuous current of the C characteristic MCB	10 A; for a short-circuit current smaller than 400 A
continuous current of the quick DIAZED fuse link	10 A, for a short-circuit current smaller than 400 A
continuous current of the DIAZED fuse link gG	10 A
Substance Prohibitance (Date)	10/01/2014
operating voltage	10/01/2014
• rated value	5 500 V
• at AC	5 500 V
— at 50 Hz rated value	5 500 V
— at 60 Hz rated value	5 500 V
at DC rated value	5 500 V
Power Electronics	
	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA)
Power Electronics	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10
Power Electronics contact reliability	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10
Power Electronics contact reliability Auxiliary circuit	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA)
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm ²)
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm ²) 2x (1.0 1.5 mm ²)
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm ²) 2x (1.0 1.5 mm ²)
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 2 2 2 Screw-type terminal 2 2 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1,0 1.5 mm²) 2x (1,0 1,5 mm²) 2x (18 14)
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type terminals	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.8 14) 1 1.2 N·m
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.8 14) 1 1.2 N·m
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type terminals	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.1 1.5 mm²) 2x (1.2 1.5 mm²) 2x (1.3 1.5 mm²) 2x (1.4 1.5 mm²) 2x (1.5 0.9 N·m
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type terminals Ambient conditions	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.8 14) 1 1.2 N·m
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded with core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type terminals Ambient conditions ambient temperature • during operation • during storage	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.1 1.5 mm²) 2x (1.2 1.5 mm²) 2x (1.3 1.5 mm²) 2x (1.4) 1 1.2 N·m 0.8 0.9 N·m
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type terminals Ambient conditions ambient temperature • during operation	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.2 N·m 0.8 0.9 N·m
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type terminals Ambient conditions ambient temperature • during operation • during storage environmental category during operation according to IEC	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.8 14) 1 1.2 N·m 0.8 0.9 N·m
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type terminals Ambient conditions ambient temperature • during operation • during storage environmental category during operation according to IEC 60721	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.8 14) 1 1.2 N·m 0.8 0.9 N·m
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type terminals Ambient conditions ambient temperature • during operation • during storage environmental category during operation according to IEC 60721 Installation/ mounting/ dimensions	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.8 14) 1 1.2 N·m 0.8 0.9 N·m
Power Electronics contact reliability Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • at AWG cables tightening torque of the screws in the bracket tightening torque for auxiliary contacts with screw-type terminals Ambient conditions ambient temperature • during operation • during storage environmental category during operation according to IEC 60721 Installation/ mounting/ dimensions fastening method	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) Silver alloy 0 2 Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1.8 1.4) 1 1.2 N·m 0.8 0.9 N·m

width	30 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	49.4 mm
installation width	29.5 mm
installation depth	49.7 mm
Certificates/ approvals	
Further information	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1100-4BL11-1NA0-Z Y15


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1100-4BL11-1NA0-Z Y15

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1100-4BL11-1NA0-Z Y15

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1100-4BL11-1NA0-Z Y15&lang=en

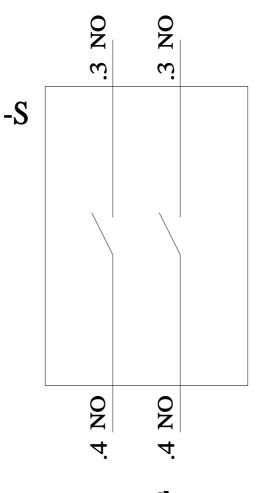

last modified:

1/27/2022 🖸