

Notes:

Material and finish:

Contact: Brass

Gold over 30~80u" nickel plating

Insulation: PA9T UL94-V0, color black

Specifications:

Current rating: 3.0A

Contact resistance: 20mΩ Max.


Withstanding Voltage: 1000V AC/DC

Insulation resistance: 1000MΩ Min.

Operating temperature: -40°C to +105°C

Tube Packaging Q'ty

20	22
18	25
16	28
14	32
12	38
10	45
8	57
6	76
4	114
No. of positions	Q'ty per tube

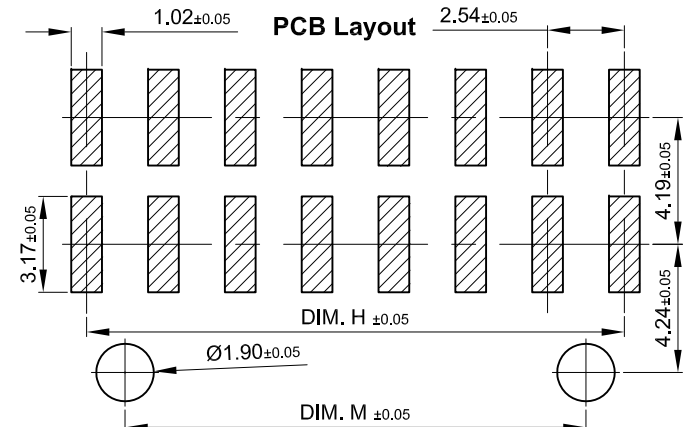

129131	129122	129113	129104	20	25.40	22.86	20.32	44
129130	129121	129112	129103	18	22.86	20.32	17.78	44
129129	129120	129111	129102	16	20.32	17.78	15.24	44
129128	129119	129110	129101	14	17.78	15.24	12.70	44
129127	129118	129109	129100	12	15.24	12.70	10.16	32
129126	129117	129108	129099	10	12.70	10.16	7.62	32
129125	129116	129107	129098	8	10.16	7.62	5.08	24
129124	129115	129106	129097	6	7.62	5.08	2.54	24
129123	129114	129105	129096	4	5.08	2.54	0.00	24
Id-Nr. Tape&Reel 10u" gold plating	Id-Nr. Tube 10u" gold plating	Id-Nr. Tape&Reel 0.8u" gold plating	Id-Nr. Tube 0.8u" gold plating	No of Pos.	DIM. G	DIM. H	DIM. M	DIM. N

Information:		Tolerances X: ±0.50 X*: ±10° X.X: ±0.40 X.X*: ±5° X.XX: ±0.25 X.XX*: ±3°	Scale 4:1
All rights reserved. Only for information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using		Subject to modification without prior notice. Drawing will not be updated.	For further information about I. D. number see manufacturing document
ERNI ERNI Asia Holding www.erni.com		Designation 2.54mm R/A Dual Row Header SMT With Locating Pegs	
A		129095	
Rev.	Date	129095.DWG	