


Z-PACK | Z-PACK 2mm HM

TE Internal #: 5352069-9 Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb /s, 25 Column, 5 Row, Mezzanine, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM

View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors >

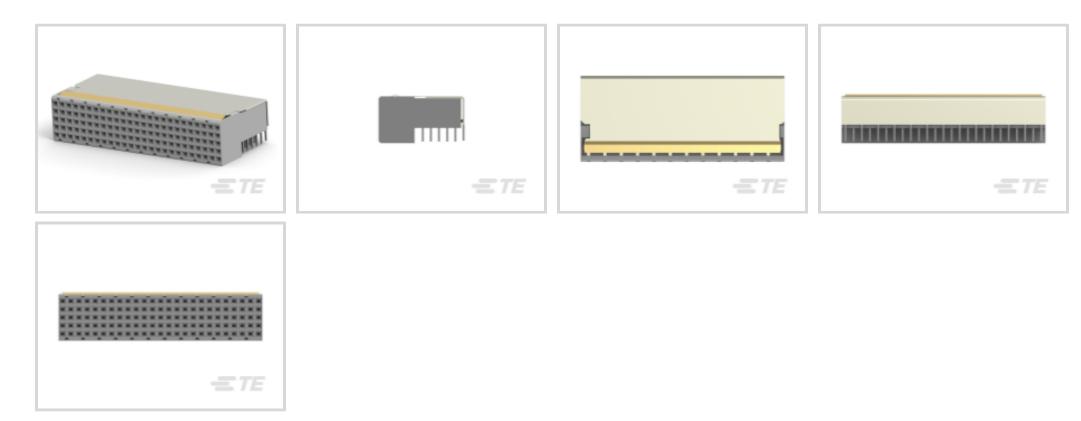

HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm

PCB Connector Assembly Type: PCB Mount Receptacle

Data Rate: **≤1 Gb/s**

Number of Columns: 25

Number of Rows: 5

Backplane Architecture: Mezzanine

All HM Receptacle Connector: Traditional Backplane, Coplanar, 2mm (48)



Features

Product Type Features

Ground Feature Type	Ground Return Shielding				
Backplane Interface Type	2mm HM				
PCB Connector Assembly Type	PCB Mount Receptacle				
Connector System	Board-to-Board				
Sealable	No				
Connector & Contact Terminates To	Printed Circuit Board				
Configuration Features					
Mating & Unmating Configuration	Make First / Break Last				
Mating & Unmating Configuration Rows Loaded	Make First / Break Last A, B, C, D, E				
Rows Loaded	A, B, C, D, E				

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 5 Row, Mezzanine, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Rackplana Architactura	Mezzanine
Backplane Architecture Number of Positions	
	125 Dight Angle
PCB Mount Orientation	Right Angle
Signal Characteristics	
Crosstalk Version	Standard
Data Rate	≤1 Gb/s
Body Features	
Primary Product Color	Gray
Contact Features	
Feedthrough Post Length	3.7 mm
CompactPCI Designation	None
Contact Type	Socket
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Contact Current Rating (Max)	1.5 A
Mechanical Attachment	
Mating Alignment Type	Multi-Purpose Center
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester - GF
Centerline (Pitch)	2 mm[.078 in]
Dimensions	
Backplane Module Length	50 mm
Usage Conditions	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Shielded	Yes
Circuit Application	Power & Signal

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 5 Row, Mezzanine, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM



Industry Standards

UL Flammability Rating	UL 94V-0		
Packaging Features			
Packaging Quantity	11		
Packaging Method	Tube		
Other			
Backplane Connector Comment	Connector tested and qualified against Telcordia GR-1217-Core quality level III, Central Office Applications		
Product Compliance For compliance documentation, visit the product page on TE.com>			
EU RoHS Directive 2011/65/EU	Compliant		
EU ELV Directive 2000/53/EC	Compliant		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold		

Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

EU REACH Regulation (EC) No. 1907/2006

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 5 Row, Mezzanine, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM






Also in the Series Z-PACK 2mm HM



Connector Hardware(97)	Hard Metric Backpl	ane Connectors	High Speed Backplane Connectors(1)	h	nsertion & Extraction Tools(2)
	(268)				

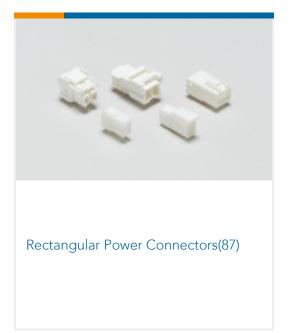

Customers Also Bought



Hard Metric Backplane Connectors, PCB Mount Receptacle, ≤1 Gb/s, 25 Column, 5 Row, Mezzanine, 125 Position, 2 mm [.078 in] Centerline, Z-PACK 2mm HM





Documents

Product Drawings Z-PACK/B25 RAF 125P

English

CAD Files

Customer View Model

ENG_CVM_CVM_5352069-9_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5352069-9_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5352069-9_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English