

# MC74AC04, MC74ACT04

## Hex Inverter

- Outputs Source/Sink 24 mA
- 'ACT04 Has TTL Compatible Inputs

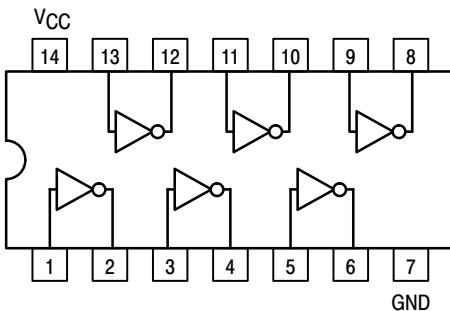


Figure 1. Pinout: 14-Lead Packages Conductors  
(Top View)

### MAXIMUM RATINGS\*


Rating	Symbol	Value	Unit
DC Supply Voltage (Referenced to GND)	V <sub>CC</sub>	-0.5 to +7.0	V
DC Input Voltage (Referenced to GND)	V <sub>in</sub>	-0.5 to V <sub>CC</sub> +0.5	V
DC Output Voltage (Referenced to GND)	V <sub>out</sub>	-0.5 to V <sub>CC</sub> +0.5	V
DC Input Current, per Pin	I <sub>in</sub>	±20	mA
DC Output Sink/Source Current, per Pin	I <sub>out</sub>	±50	mA
DC V <sub>CC</sub> or GND Current per Output Pin	I <sub>CC</sub>	±50	mA
Storage Temperature	T <sub>stg</sub>	-65 to +150	°C

\*Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the Recommended Operating Conditions.




ON Semiconductor™


<http://onsemi.com>




PDIP-14  
N SUFFIX  
CASE 646



SO-14  
D SUFFIX  
CASE 751A



TSSOP-14  
DT SUFFIX  
CASE 948G



EIAJ-14  
M SUFFIX  
CASE 965

### ORDERING INFORMATION

Device	Package	Shipping
MC74AC04N	PDIP-14	25 Units/Rail
MC74ACT04N	PDIP-14	25 Units/Rail
MC74AC04D	SOIC-14	55 Units/Rail
MC74AC04DR2	SOIC-14	2500 Tape & Reel
MC74ACT04D	SOIC-14	55 Units/Rail
MC74ACT04DR2	SOIC-14	2500 Tape & Reel
MC74AC04DT	TSSOP-14	96 Units/Rail
MC74AC04DTR2	TSSOP-14	2500 Tape & Reel
MC74ACT04DT	TSSOP-14	96 Units/Rail
MC74ACT04DTR2	TSSOP-14	2500 Tape & Reel
MC74AC04M	EIAJ-14	50 Units/Rail
MC74AC04MEL	EIAJ-14	2000 Tape & Reel
MC74ACT04M	EIAJ-14	50 Units/Rail
MC74ACT04MEL	EIAJ-14	2000 Tape & Reel

### DEVICE MARKING INFORMATION

See general marking information in the device marking section on page 58 of this data sheet.

# MC74AC04, MC74ACT04

## RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter		Min	Typ	Max	Unit
V <sub>CC</sub>	Supply Voltage	'AC	2.0	5.0	6.0	V
		'ACT	4.5	5.0	5.5	
V <sub>in</sub> , V <sub>out</sub>	DC Input Voltage, Output Voltage (Ref. to GND)		0	—	V <sub>CC</sub>	V
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Time (Note 1) 'AC Devices except Schmitt Inputs	V <sub>CC</sub> @ 3.0 V	—	150	—	ns/V
		V <sub>CC</sub> @ 4.5 V	—	40	—	
		V <sub>CC</sub> @ 5.5 V	—	25	—	
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Time (Note 2) 'ACT Devices except Schmitt Inputs	V <sub>CC</sub> @ 4.5 V	—	10	—	ns/V
		V <sub>CC</sub> @ 5.5 V	—	8.0	—	
T <sub>J</sub>	Junction Temperature (PDIP)		—	—	140	°C
T <sub>A</sub>	Operating Ambient Temperature Range		-40	25	85	°C
I <sub>OH</sub>	Output Current – High		—	—	-24	mA
I <sub>OL</sub>	Output Current – Low		—	—	24	mA

1. V<sub>in</sub> from 30% to 70% V<sub>CC</sub>; see individual Data Sheets for devices that differ from the typical input rise and fall times.  
 2. V<sub>in</sub> from 0.8 V to 2.0 V; see individual Data Sheets for devices that differ from the typical input rise and fall times.

## DC CHARACTERISTICS

Symbol	Parameter	V <sub>CC</sub> (V)	74AC		Unit	Conditions		
			T <sub>A</sub> = +25°C					
			Typ	Guaranteed Limits				
V <sub>IH</sub>	Minimum High Level Input Voltage	3.0 4.5 5.5	1.5 2.25 2.75	2.1 3.15 3.85	—	V <sub>OUT</sub> = 0.1 V or V <sub>CC</sub> – 0.1 V		
V <sub>IL</sub>	Maximum Low Level Input Voltage	3.0 4.5 5.5	1.5 2.25 2.75	0.9 1.35 1.65	—	V <sub>OUT</sub> = 0.1 V or V <sub>CC</sub> – 0.1 V		
V <sub>OH</sub>	Minimum High Level Output Voltage	3.0 4.5 5.5	2.99 4.49 5.49	2.9 4.4 5.4	—	I <sub>OUT</sub> = -50 μA		
		3.0 4.5 5.5	— — —	2.56 3.86 4.86	—	*V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub> I <sub>OH</sub> -12 mA -24 mA -24 mA		
V <sub>OL</sub>	Maximum Low Level Output Voltage	3.0 4.5 5.5	0.002 0.001 0.001	0.1 0.1 0.1	—	I <sub>OUT</sub> = 50 μA		
		3.0 4.5 5.5	— — —	0.36 0.36 0.36	—	*V <sub>IN</sub> = V <sub>IL</sub> or V <sub>IH</sub> I <sub>OL</sub> 12 mA 24 mA 24 mA		
I <sub>IN</sub>	Maximum Input Leakage Current	5.5	—	±0.1	±1.0	μA		
I <sub>OLD</sub>	†Minimum Dynamic Output Current	5.5	—	—	75	mA		
I <sub>OHD</sub>		5.5	—	—	-75	mA		
I <sub>CC</sub>	Maximum Quiescent Supply Current	5.5	—	4.0	40	μA		
						V <sub>IN</sub> = V <sub>CC</sub> or GND		

\*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

NOTE: I<sub>IN</sub> and I<sub>CC</sub> @ 3.0 V are guaranteed to be less than or equal to the respective limit @ 5.5 V V<sub>CC</sub>.

# MC74AC04, MC74ACT04

**AC CHARACTERISTICS** (For Figures and Waveforms – See Section 3 of the ON Semiconductor FACT Data Book, DL138/D)

Symbol	Parameter	$V_{CC}^*$ (V)	74AC			74AC		Unit	Fig. No.		
			$T_A = +25^\circ C$ $C_L = 50 \text{ pF}$			$T_A = -40^\circ C$ to $+85^\circ C$ $C_L = 50 \text{ pF}$					
			Min	Typ	Max	Min	Max				
$t_{PLH}$	Propagation Delay	3.3 5.0	1.5 1.5	4.5 4.0	9.0 7.0	1.0 1.0	10 7.5	ns	3-5		
$t_{PHL}$	Propagation Delay	3.3 5.0	1.5 1.5	4.5 3.5	8.5 6.5	1.0 1.0	9.5 7.0	ns	3-5		

\*Voltage Range 3.3 V is  $3.3 \text{ V} \pm 0.3 \text{ V}$ .  
Voltage Range 5.0 V is  $5.0 \text{ V} \pm 0.5 \text{ V}$ .

## DC CHARACTERISTICS

Symbol	Parameter	$V_{CC}$ (V)	74ACT		74ACT		Unit	Conditions		
			$T_A = +25^\circ C$		$T_A = -40^\circ C$ to $+85^\circ C$					
			Typ	Guaranteed Limits	Typ	Guaranteed Limits				
$V_{IH}$	Minimum High Level Input Voltage	4.5 5.5	1.5 1.5	2.0 2.0	2.0 2.0		V	$V_{OUT} = 0.1 \text{ V}$ or $V_{CC} - 0.1 \text{ V}$		
$V_{IL}$	Maximum Low Level Input Voltage	4.5 5.5	1.5 1.5	0.8 0.8	0.8 0.8		V	$V_{OUT} = 0.1 \text{ V}$ or $V_{CC} - 0.1 \text{ V}$		
$V_{OH}$	Minimum High Level Output Voltage	4.5 5.5	4.49 5.49	4.4 5.4	4.4 5.4		V	$I_{OUT} = -50 \mu\text{A}$		
		4.5 5.5	– –	3.86 4.86	3.76 4.76		V	$*V_{IN} = V_{IL} \text{ or } V_{IH}$ $I_{OH} = -24 \text{ mA}$		
$V_{OL}$	Maximum Low Level Output Voltage	4.5 5.5	0.001 0.001	0.1 0.1	0.1 0.1		V	$I_{OUT} = 50 \mu\text{A}$		
		4.5 5.5	– –	0.36 0.36	0.44 0.44		V	$*V_{IN} = V_{IL} \text{ or } V_{IH}$ $I_{OL} = 24 \text{ mA}$		
$I_{IN}$	Maximum Input Leakage Current	5.5	–	$\pm 0.1$	$\pm 1.0$		$\mu\text{A}$	$V_I = V_{CC}, \text{ GND}$		
$\Delta I_{CCT}$	Additional Max. $I_{CC}$ /Input	5.5	0.6	–	1.5	mA		$V_I = V_{CC} - 2.1 \text{ V}$		
$I_{OLD}$	†Minimum Dynamic Output Current	5.5	–	–	75	mA		$V_{OLD} = 1.65 \text{ V Max}$		
		5.5	–	–	–75	mA		$V_{OHD} = 3.85 \text{ V Min}$		
$I_{CC}$	Maximum Quiescent Supply Current	5.5	–	4.0	40	$\mu\text{A}$		$V_{IN} = V_{CC} \text{ or GND}$		

\*All outputs loaded; thresholds on input associated with output under test.

†Maximum test duration 2.0 ms, one output loaded at a time.

# MC74AC04, MC74ACT04

**AC CHARACTERISTICS** (For Figures and Waveforms – See Section 3 of the ON Semiconductor FACT Data Book, DL138/D)

Symbol	Parameter	V <sub>CC</sub> * (V)	74ACT			74ACT		Unit	Fig. No.		
			T <sub>A</sub> = +25°C C <sub>L</sub> = 50 pF			T <sub>A</sub> = -40°C to +85°C C <sub>L</sub> = 50 pF					
			Min	Typ	Max	Min	Max				
t <sub>PLH</sub>	Propagation Delay	5.0	1.5		8.5	1.0	9.0	ns	3–6		
t <sub>PHL</sub>	Propagation Delay	5.0	1.5		8.0	1.0	8.5	ns	3–6		







\*Voltage Range 5.0 V is 5.0 V ±0.5 V.

## CAPACITANCE

Symbol	Parameter	Value Typ	Unit	Test Conditions
C <sub>IN</sub>	Input Capacitance	4.5	pF	V <sub>CC</sub> = 5.0 V
C <sub>PD</sub>	Power Dissipation Capacitance	30	pF	V <sub>CC</sub> = 5.0 V

## MC74AC04, MC74ACT04

### MARKING DIAGRAMS



A = Assembly Location

WL, L = Wafer Lot

YY, Y = Year

WW, W = Work Week