
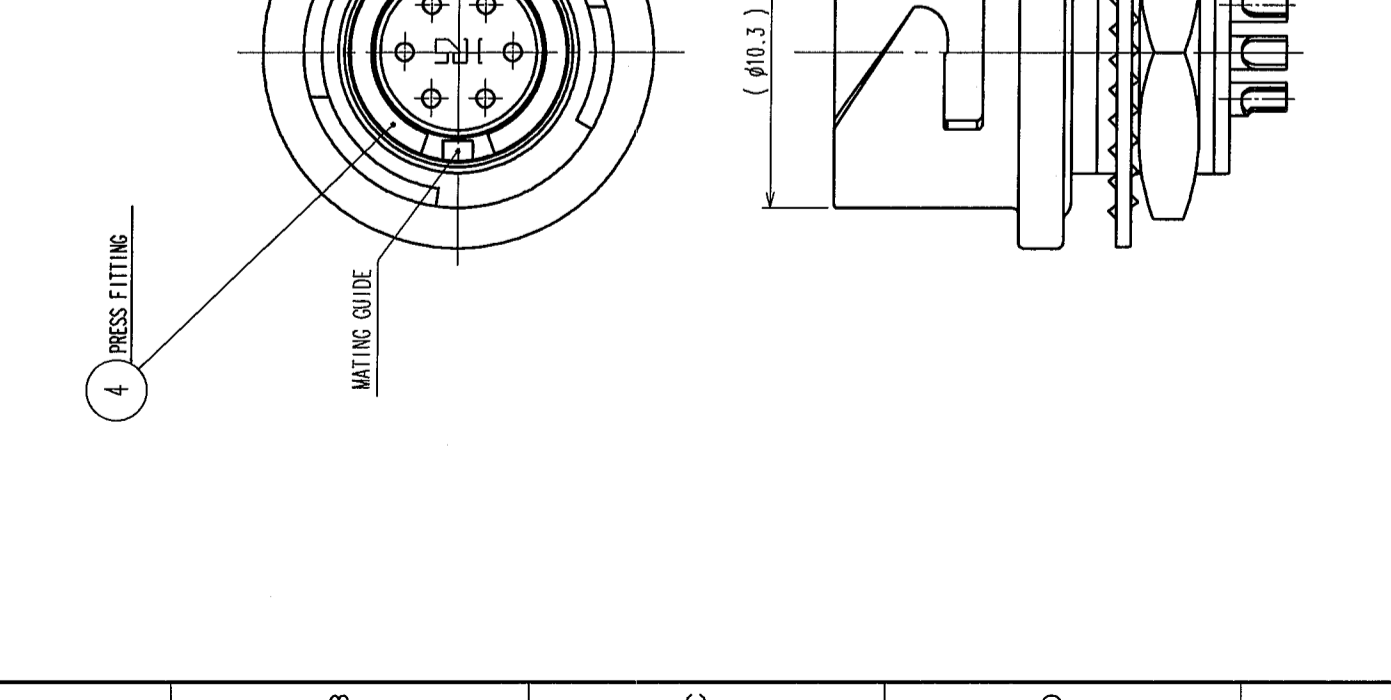
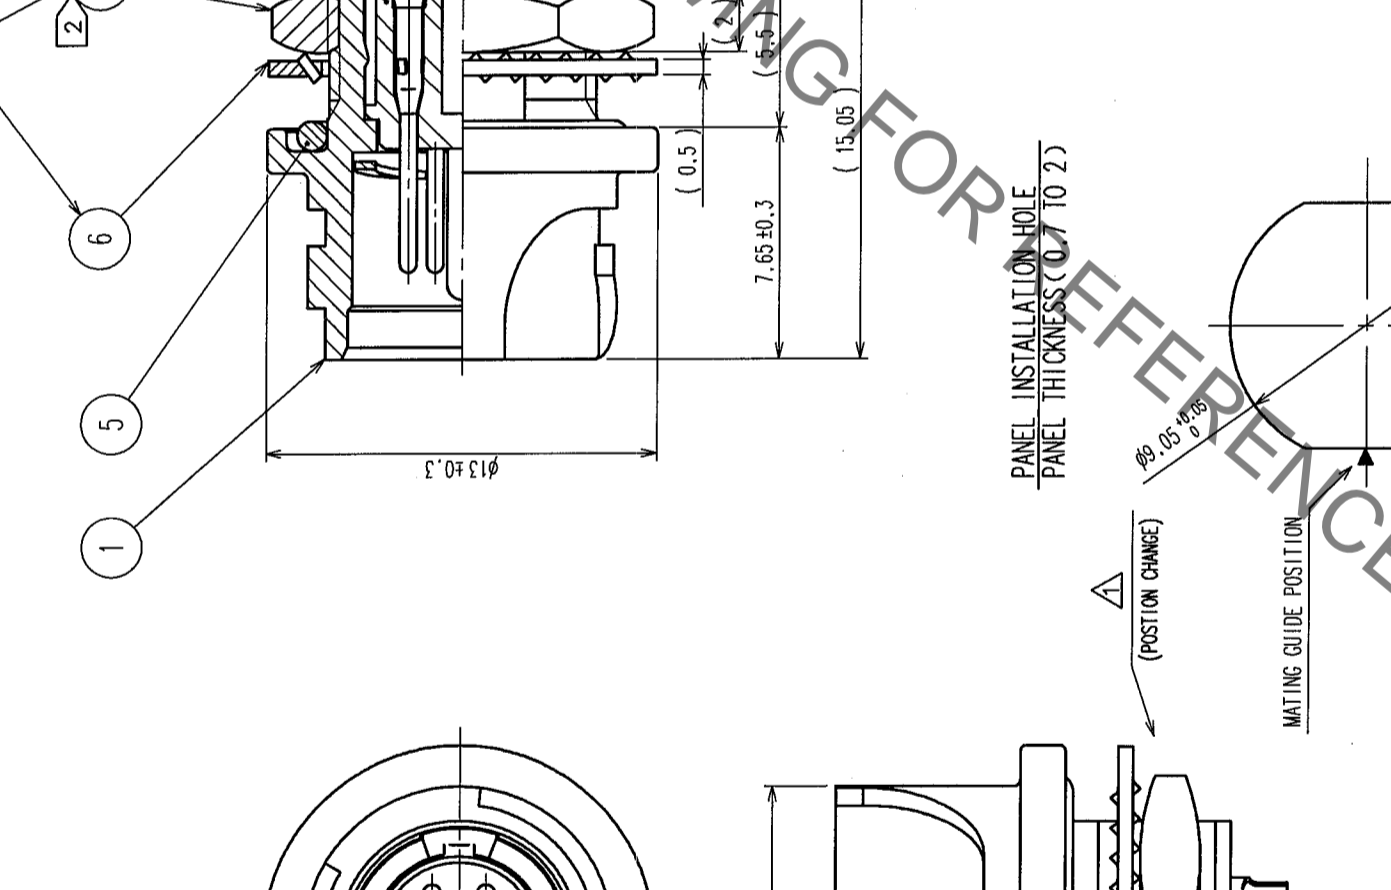


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	RE-C-03960	H.Z	M.S	04.12.1					

1									
2									
3									
4									

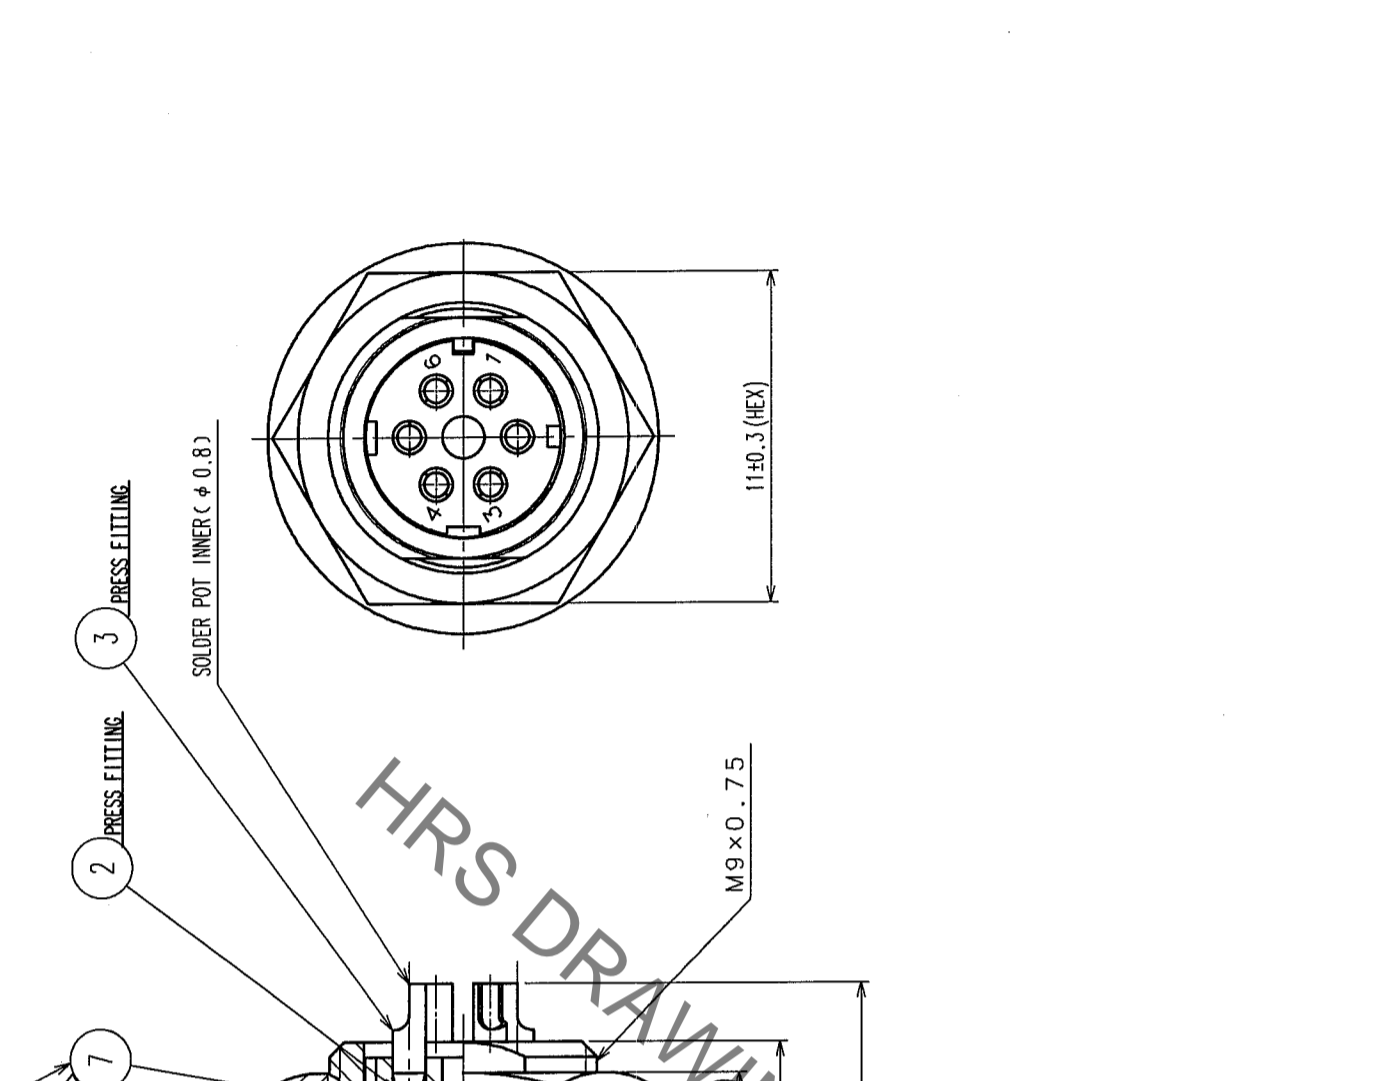

4	PHOSPHOR BRONZE	NICKEL PLATING		7	STEEL	NICKEL PLATING		
3	COPPER ALLOY	(BLACK)	UL94V-0	6	STEEL	NICKEL PLATING		
2	PPS	NICKEL PLATING		5	CHLOROPRENE RUBBER	(BLACK)		
1	ZINC ALLOY	NICKEL PLATING						
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS			
CODE NO. (OLD)	CL							
DRAWN	H. Kawashimo	DESIGNED	H. Zemba	CHECKED	M. Sato	APPROVED	M. Yoshida	RELEASED
DATE	04.06.08	DATE	04.08.29	DATE	04.08.31	DATE	04.09.01	
PART NO.	LFO7WBR-6P							
DRAWING NO.	EDC3-113836							
SCALE	4 : 1							
UNITS	mm							

NOTES

- PLATING (REF. NO. 3)
- CONTACT AREA : GOLD 0.2 μm min
OTHERS : GOLD AND NICKEL
- UNDER PLATING : NICKEL 2 μm min
- THE RECOMMENDED CLAMP TORQUE OF REF. NO. 7 TO BE 1.5 TO 2N · m.
THREAD LOCKER TO THE THREADED PORTION OF REF. NO. 1 IS RECOMMENDED TO PREVENT REF. NO. 7 FROM LOOSING.
RECOMMENDED THREAD LOCKER: LOCTITE 271, HENKEL JAPAN LTD.
- WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL, BE CAREFUL REF. NO. 5 IS ASSEMBLED SURELY INTO THE GROOVE OF REF. NO. 1 AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.