



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

**1850-1910 MHz / 1930-1990 MHz
LTE Cavity Duplexer/Diplexer
Part Number: AD1880-1960D237**




<u>Characteristics</u>	<u>Band 1</u>	<u>Band 2</u>
Passband:	1850-1910 MHz	1930-1990 MHz
Bandwidth:	60 MHz	60 MHz
Passband Return Loss:		
Passband Insertion Loss:	> 1.2 dB	> 1.2 dB
Passband Ripple:	< 0.8 dB	< 0.5 dB
Input / Output Impedance:	50 Ohms	50 Ohms
Isolation:	90 dB	90 dB
Power Handling:	150 Watts	150 Watts

<u>Mechanical</u>	
Mounting Method:	Threaded Mounting Holes
Connector Type:	Low I.M. N-(F)
Dimensions:	

<u>Environmental</u>	
Operating Temperature:	-40 to +70 deg.C
Storage Temperature:	-50 to +90 deg.C

Outline Drawing:

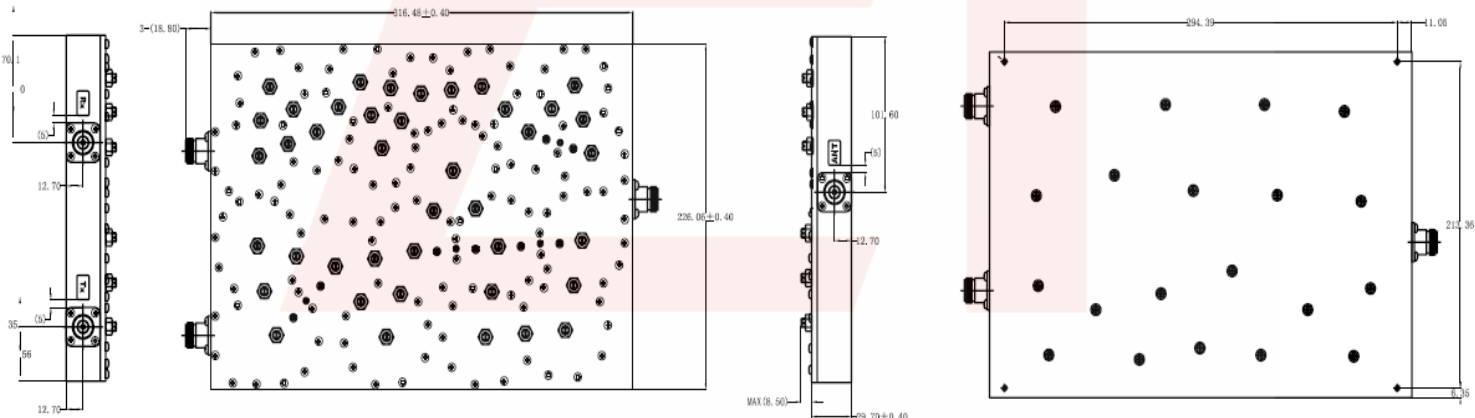



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1850-1910 MHz / 1930-1990 MHz
LTE Cavity Duplexer/Diplexer
Part Number: AD1880-1960D237



Response Plot:

7/14/2021 1:29:42 PM

