

Part Number:TOP156

3.96mm[0.156inch] test pitch



Probe Specifications

Minimum Center:	3.96mm[0.156inch]
Full Stroke:	6.35mm[0.25inch]
Recommended Stroke:	4.25mm[0.167inch]
Spring Force:	200g[7.054oz]
Impedance:	15milliohms
Current:	5Amp
Temperature:	-55°C to 120°C [-67°F to 248°F]
Spring Life:	500K cycles
Diameter Tolerance:	±0.01mm[±0.39mil]
Length Tolerance:	±0.10mm[±3.93mil]
Straightness Tolerance:	0.05mm[±1.97mil]

Materials Specifications


Plunger:	SK-4, BeCu, Au plating treatment
Spring:	Music wire, Au plating treatment
Barrel:	Phosphor Copper,Au plating treatment

Spring Force

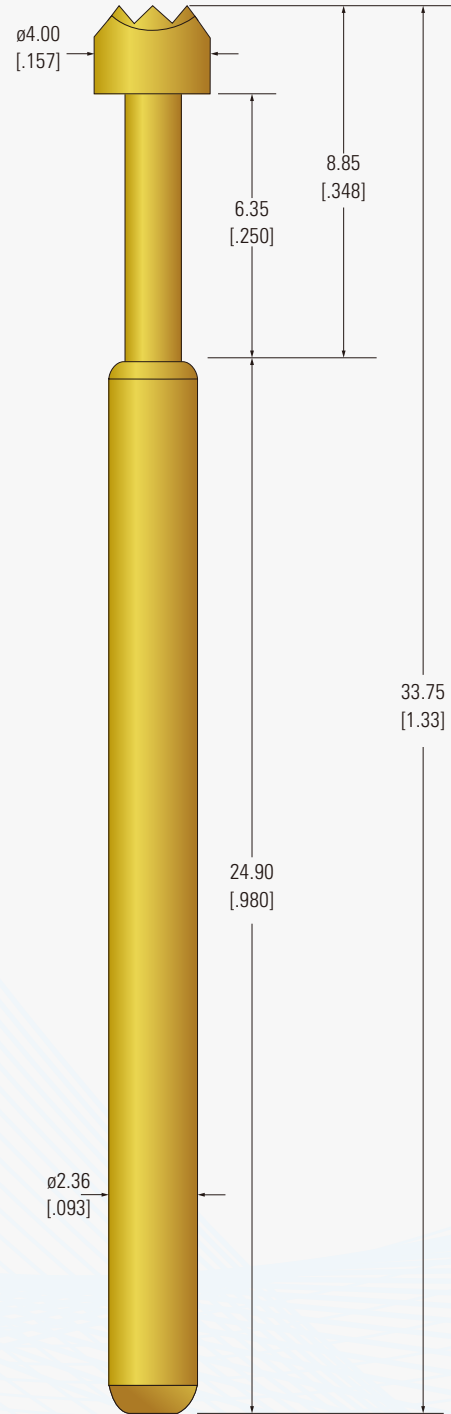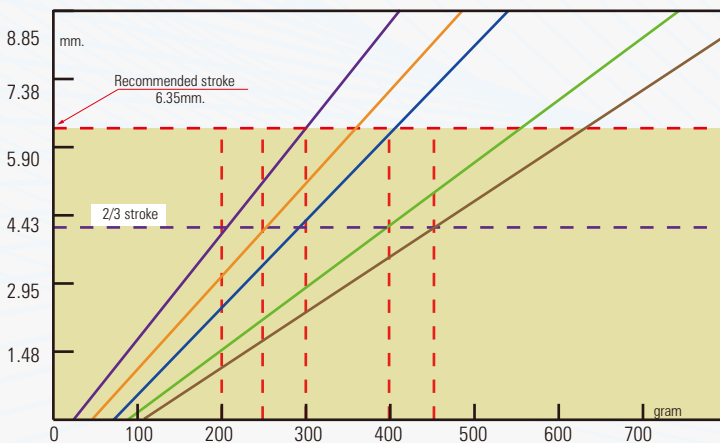


Probe mm.[inch]


Receptacle mm.[inch]

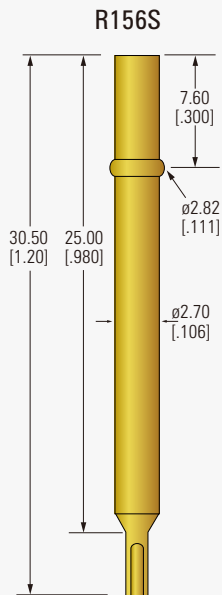

Fixture Drilling Measurement

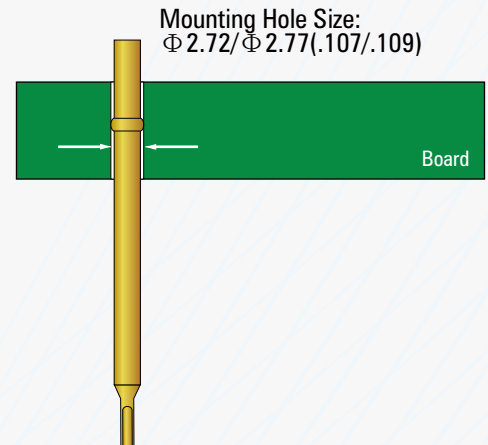

Tip Style

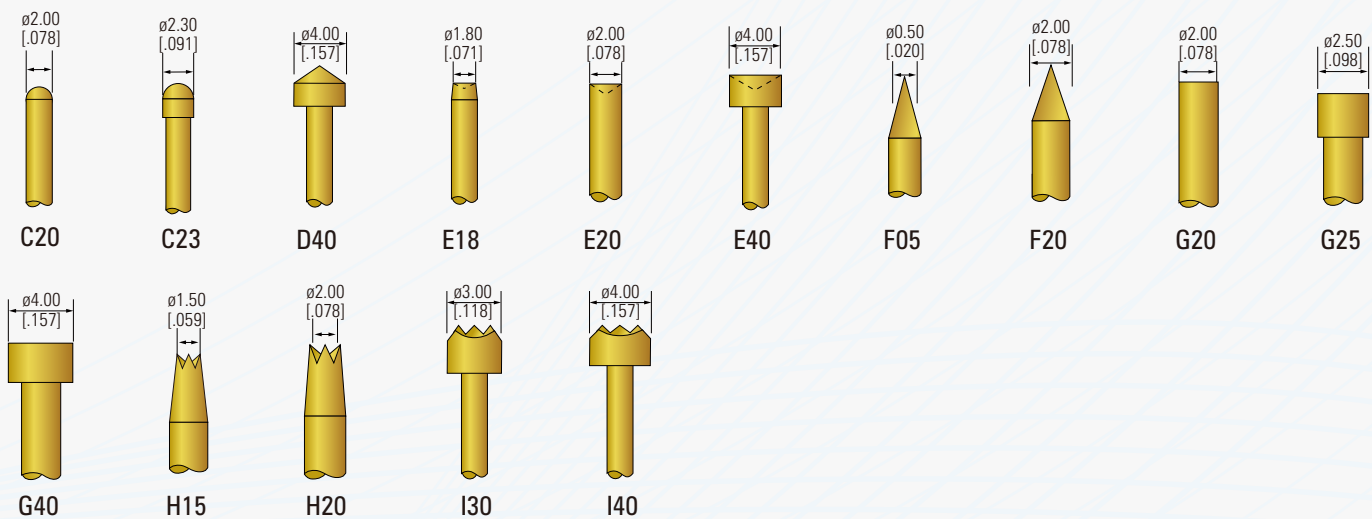

How to order

TOP	156	I	40	200G
Series Name TOP=Normal ICT Probe CTOP=High Current Probe BP=Battery Probe FTOP=Frequency Probe ATOP=Automotive Probe SWTOP=Switch Probe	Test Pitch Number 156=156mil test pitch	Head Style Code I=9 points crown C=Round more...	Head Diameter 40=4.0mm=0.157inch	Spring Force 100G=100grams=1Newton 200G=200grams=2Newton 250G=250grams=2.5Newton more...