


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: PICOCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
2. P/N: 9205-HS
INSULATOR: HEAT SHRINK TUBING. BLACK.
BODY: NICKEL UNDERPLATED BRASS.
CONTACT: GOLD FLASH OVER NICKEL UNDERPLATED BRASS.
GOLD FLASH BeCu SPRING.
3. P/N: W-701/COLOR
28AWG TINNED COPPER
0.047 [1.19] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 1.0 AMPS
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
HANDS FREE: 600 W.V.D.C.
MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

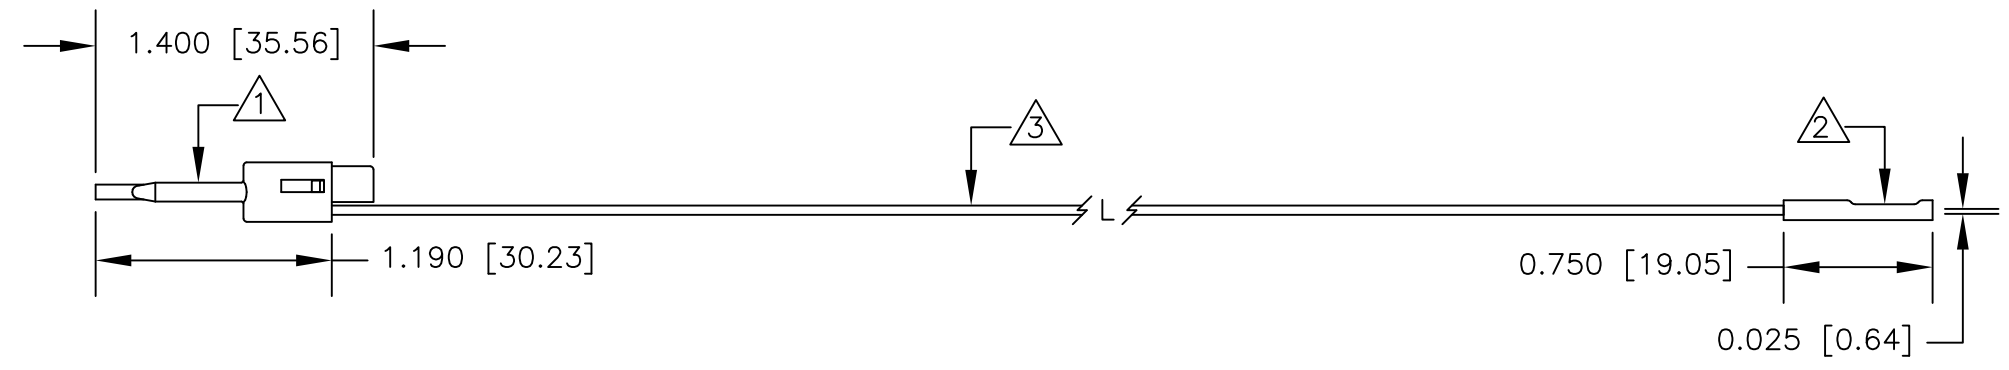

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	5/13	
			APPROVED BY			
		FINISH SEE NOTE.	DESCRIPTION			
			PICO HOOK TO 0.025 [0.64] SQ. SOCKET (28AWG)			
NEXT ASSY	USED ON		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
			B	08505	P703	
APPLICATION		DO NOT SCALE DRAWING	SCALE		1:1	SHEET 1 OF 1