



### Electrical Specifications

**Pass Band:** 860-940 MHz

**3dB Cutoff:** 979 MHz

**Pass Band Insertion Loss:** 0.4 dB Max

**Rejection:**  $\geq 66$  dBc @ 1250-2820 MHz

### Mechanical

**Connector Type:** SMA (F)

**Dimensions:** 1.50 x 0.75 x 0.50 Inches

### Environmental


**Operating Temperature:** -40 to +85° C

**Storage Temperature:** -50 to +95° C

**Shock:** 20 G. 11 ms


**Vibration:** 20 G. 5 to 200 MHz

### Outline Drawing:

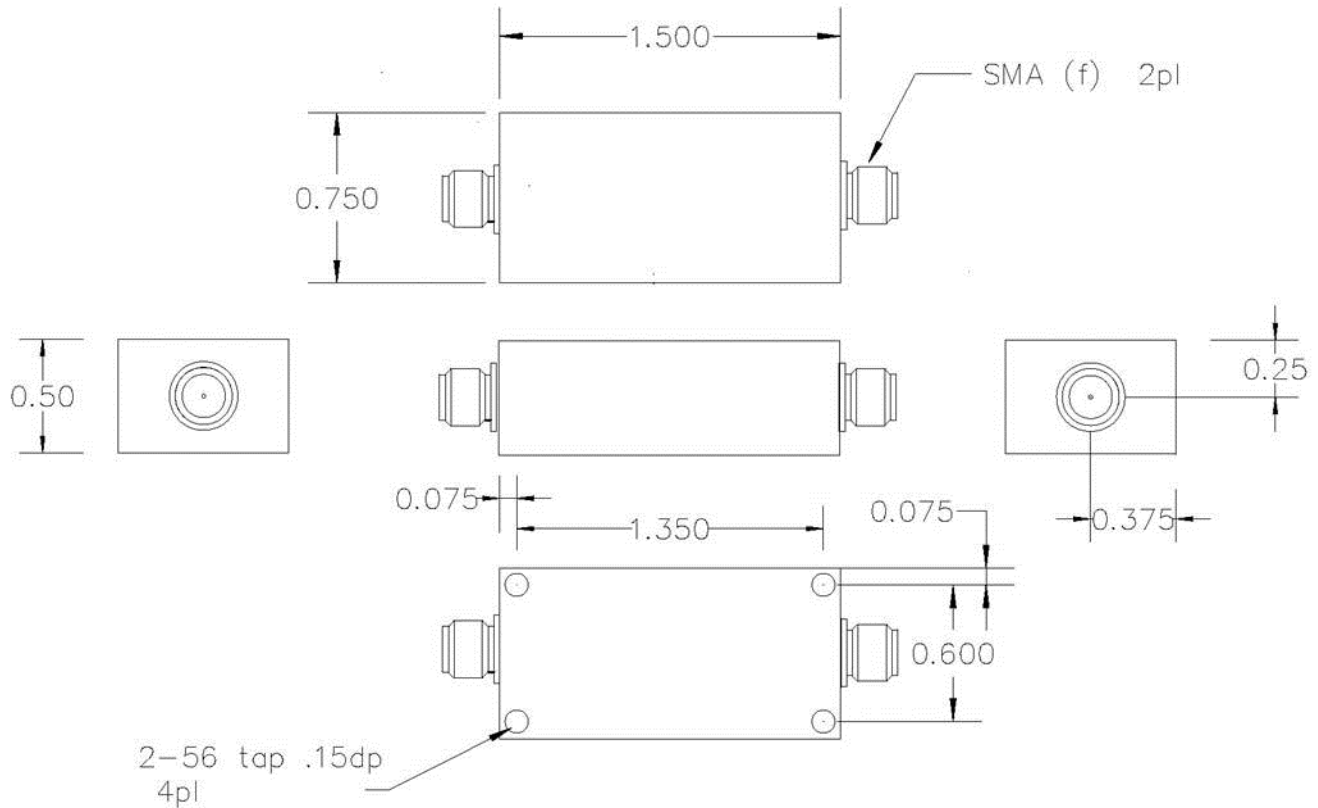



### Response Plot:

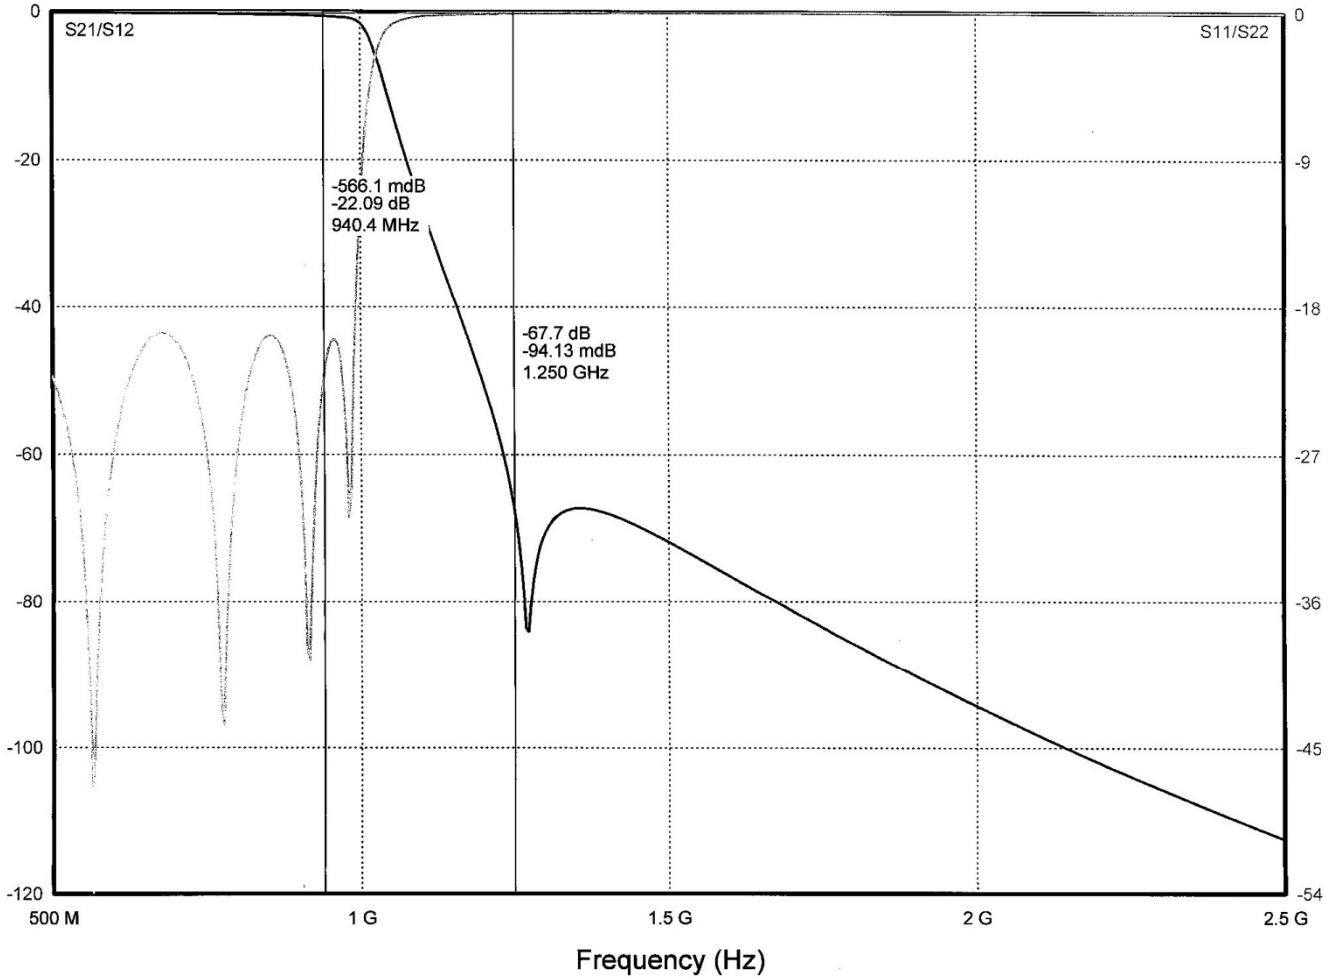

**Note:** This is a simulation plot. Actual results may differ once the product is implemented.