
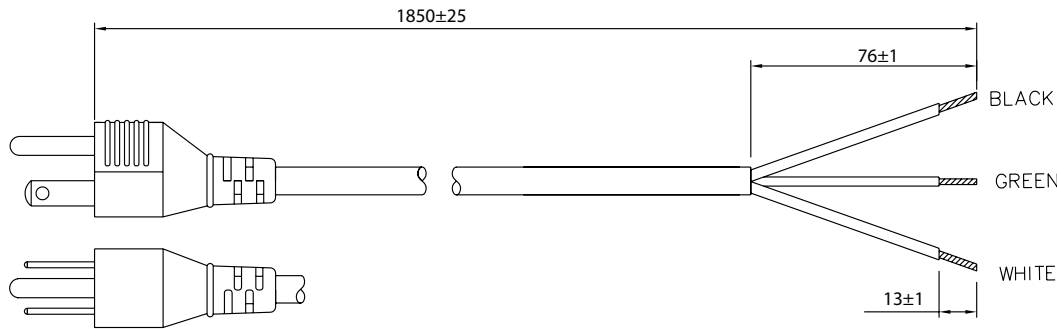


PROPRIETARY INFORMATION:  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE		
B	REDRAW PICTURE, RFS.27373	06/19/19	BS

A



B

**Customer Approval of Specification:**  
 Please approve, sign and send back to GlobTek so we can complete order processing. A delay in receipt of this form will delay delivery schedule.

Company Name:  
 Customer P/N:  
 Quote Number:  
 Date:  
 Auth. Rep. Name:  
 Auth. Rep. Signature:

**1. GENERAL SPECIFICATIONS:**

RATING: 10A / 125V AC  
 CABLE TYPE / SIZE: SJT, # 18 AWG, 3 CONDUCTOR  
 TEMPERATURE RATING: 60° C  
 CONDUCTOR COLORS: BLACK / WHITE / GREEN  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH: 1850 ± 25 mm  
 CABLE OUTER DIAMETER: 7.8 ± 0.2 mm  
 END 'A' PLUG: NEMA 5-15P  
 END 'B': SEE TERMINATION TABLE  
 APPROVALS PLUG: UL, CSA OR cUL  
 APPROVALS CABLE: UL, CSA OR cUL

**2. PACKING:**

BULK PACKED, BUNDLES OF 25.  
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

**3. NOTES:**

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



**CONDUCTOR TERMINATION TABLE:**

Wire	Color	ROJ ± 1 mm	RIJ ± 1 mm	Terminal
Ground	Green	76	13	Stripped
Neutral	White	76	13	Stripped
Line	Black	76	13	Stripped

RELEASED  
 By PUCXD  
 2:26 pm, Jun 20, 2019

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		<b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: BS		DATE: 06/19/19		DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET  REV. B
DRAWN: NF		DATE: 06/19/19		
APRVD: BS		DATE: 06/19/19		
		SCALE: NONE		PART NO: <b>3021066F000</b>  SHEET 1/1

Foot Note:  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice