

# Type LPS-08

## “Add-On” Automotive Fuse Holder

### Mini Automotive Low Profile

### Blade Type Fuse



www.optifuse.com

(619) 593-5050

Rating: 58VDC

Max Combined Current - Both Circuits - 30A

Max Primary Circuit - 25A

Max Auxiliary Circuit - 15A


Body Material: Thermoplastic

For use with Type APS Fuse (Mini-Automotive Low Profile Blade Type)

Wire: 16 AWG Red Wire

Connector: Butt-Splice Connector

**Mechanical Dimensions: Inches [mm]**

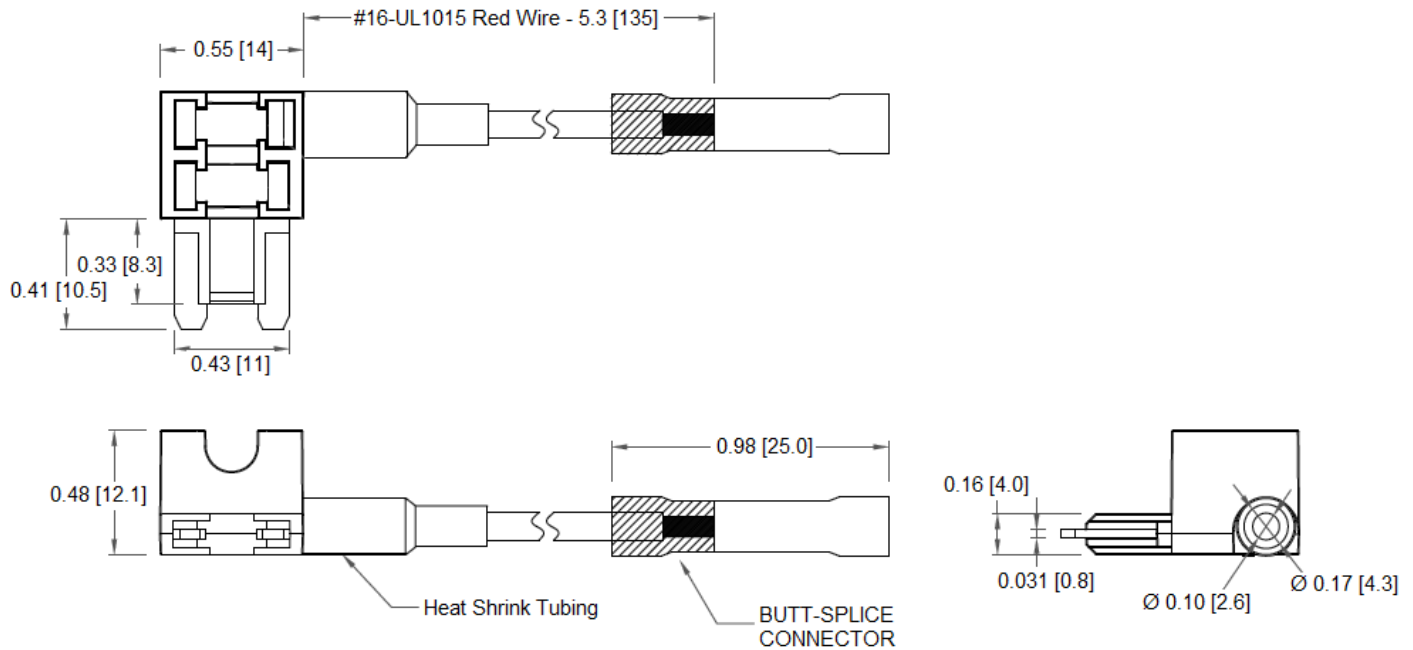

**Warning:**



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Device is intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.