




| | | | | | |
|---|---|--|-----------|--------------|---|
| RoHS Compliant | | DIMENSIONS ARE IN INCHES [MILLIMETERS] TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 3 Degrees TWO PLACE DECIMAL ± .015 [.381] THREE PLACE DECIMAL ± .010 [.254] | NAME | DATE |  |
| THIRD ANGLE PROJECTION  | DRAWN TNC CHECKED ENG APPR. MFG APPR. Q.A. | | 7/22/2015 | | |
| DO NOT SCALE DRAWING | | MATERIAL: | COMMENTS: | | |
| PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ORBEL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ORBEL CORPORATION IS PROHIBITED. | | .003" [.076] BeCu ALLOY 25, 1/2 HARD | | | |
| | | FINISH: | | SCALE: 5:1 | |
| WEIGHT: 0.023oz. [0.648g] | | CAGE CODE: 57DU2 | | SHEET 1 OF 1 | |

HOW TO ORDER FINGER-STOCK GASKETS

The chart below is an easy-to-use reference on how Orbel finger-stock gasket part numbers are created and used to order standard and custom gaskets. Custom configurations that fall outside of our standard gasket styles are also available.

Sample Part Number: 30B09-BFA024000T

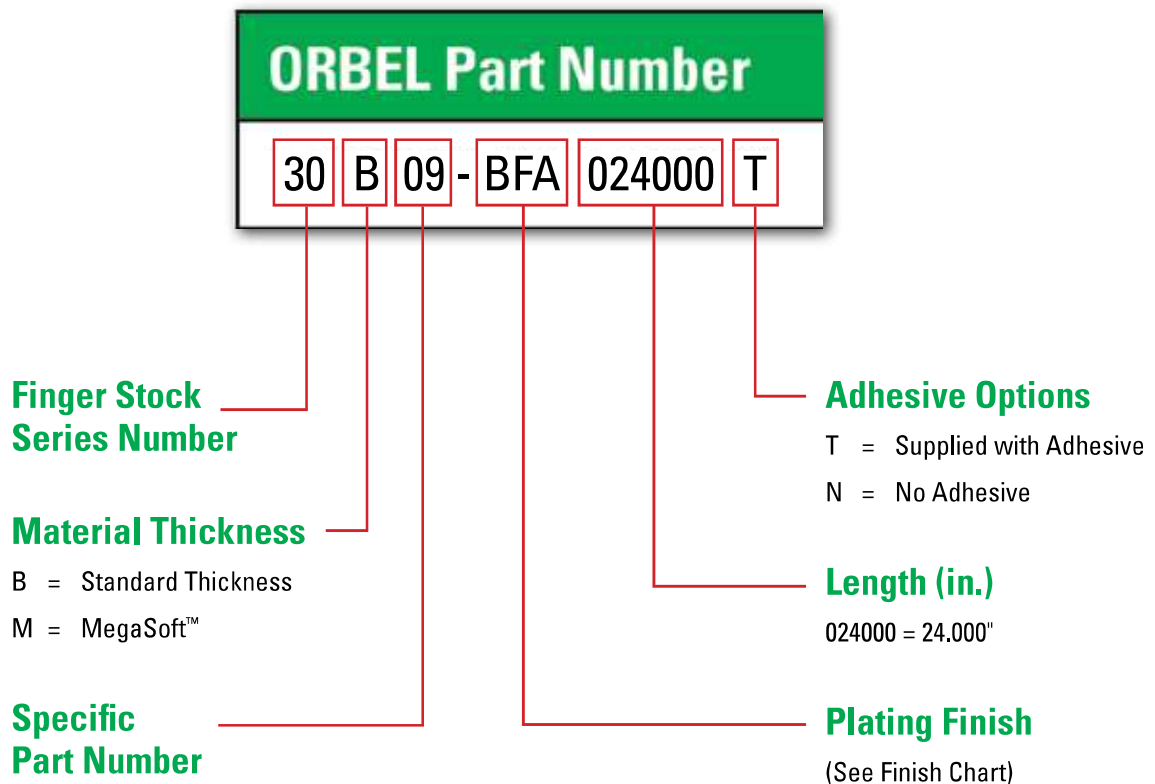

| PLATING FINISHES | | | |
|--|-------------|------------------------|-------------|
| Finish Type | Finish Code | Finish Type | Finish Code |
| SILVER | AGA | NICKEL, ELECTROLESS | NIP |
| GOLD .000050" MIN | AUA | TIN/LEAD 90/10, MATTE | PBA |
| GOLD .000050" MIN with NICKEL FLASH UNDERPLATE | AUK | TIN/LEAD 60/40, MATTE | PBB |
| BRIGHT FINISH, UNPLATED | BFA | TIN/LEAD 90/10, BRIGHT | PBC |
| BRIGHT FINISH, SOLDERABLE | BFS | TIN/LEAD 60/40, BRIGHT | PBD |
| CADMIUM + CLEAR CHROMATE | CDA | TIN, BRIGHT | SNA |
| CADMIUM + YELLOW CHROMATE | CDB | TIN, MATTE | SNB |
| NICKEL, BRIGHT | NIA | ZINC + CLEAR CHROMATE | ZNA |
| NICKEL, MATTE OR SULFAMATE NICKEL | NIB | ZINC + YELLOW CHROMATE | ZNB |

All plating thicknesses are .0001" min. except where noted.