


T-1 Wire Terminal (standard)



| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM6151 | 5.0 | .060 | .150 | 5,000 | C-2R |
| CM6211 | 5.0 | .080 | .150 | 15,000 | C-2R |
| CM7214 | 5.0 | .115 | .220 | 5,000 | C-2R |
| CM7215 | 5.0 | .115 | .190 | 10,000 | C-2R |
| CM7216 | 5.0 | .125 | .250 | 5,000 | C-2R |
| CM8175 | 5.0 | .125 | .250 | 5,000 | C-2R |
| CM8179 | 5.0 | .125 | .250 | 5,000 | C-2R |
| CM8602 | 5.0 | .017 | .005 | 10,000 | C-2R |
| CM8729 | 5.0 | .045 | .040 | 10,000 | C-2R |
| CM7218 | 10.0 | .027 | .100 | 10,000 | C-2F |
| CM7219 | 12.0 | .060 | .150 | 10,000 | C-2F |
| CM23 | 14.0 | .040 | .150 | 16,000 | C-2V |
| CM8111 | 14.0 | .065 | .150 | 10,000 | C-2F |
| CM7220 | 18.0 | .026 | .150 | 10,000 | C-2F |
| CM6838 | 28.0 | .024 | .150 | 4,000 | CC-2F |

T-1 Sub-Midget Flange Base

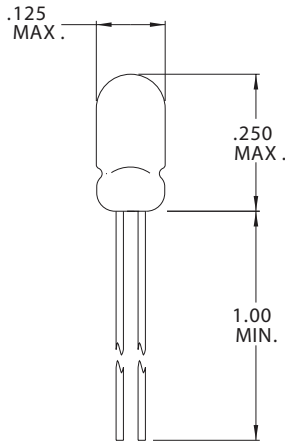

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM7244 | 1.25 | .012 | .004 | 1,000 | C-6 |
| CM7245 | 1.35 | .220 | .020 | 25,000 | C-2R |
| CM7226 | 1.5 | .015 | .010 | 5,000 | C-2R |
| CM7227 | 1.5 | .066 | .015 | 100,000 | C-2R |
| CM7228 | 1.5 | .008 | .001 | 10,000 | C-2V |
| CM8102 | 1.5 | .075 | .030 | 16,000 | C-2R |
| CM7246 | 2.5 | .015 | .001 | 10,000 | C-2R |
| CM7247 | 2.5 | .100 | .100 | 10,000 | C-2R |
| CM7248 | 2.5 | .320 | .210 | 5,000 | C-2R |
| CM679 | 3.0 | .013 | .001 | 10,000 | C-2R |
| CM7229 | 3.0 | .016 | .020 | 5,000 | C-2R |
| CM7230 | 3.0 | .025 | .020 | 10,000 | C-2R |
| CM7231 | 3.0 | .060 | .030 | 100,000 | C-2R |
| CM7232 | 3.0 | .120 | .130 | 16,000 | C-2R |
| CM7249 | 3.0 | .008 | .001 | 16,000 | C-2R |
| CM682 | 5.0 | .060 | .030 | 60,000 | C-2R |
| CM685 | 5.0 | .060 | .050 | 25,000 | C-2R |
| CM714 | 5.0 | .075 | .090 | 25,000 | C-2R |
| CM718 | 5.0 | .115 | .150 | 40,000 | C-2R |
| CM6810 | 5.0 | .060 | .150 | 5,000 | C-2R |
| CM7006 | 5.0 | .064 | .080 | 40,000 | C-2R |
| CM7233 | 5.0 | .016 | .015 | 10,000 | C-2V |