



specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Surge Protection	Ambient Temp (F)	Power Factor	UL listing	THC	Beam Angle	Enclosed Fixture Rated
45W - 60W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	4 KV built-in	-40° - 113°	> 0.9	damp location	< 20%	omni-directional	yes


select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy	Consumption
GI-CC-360D250-UL4	4000K	EX39	9,000	155 lm / W	45W - 60W selectable
GI-CC-360C250-UL4	5000K	EX39	9,000	155 lm / W	45W - 60W selectable
GI-CC-D250-E26UL4	4000K	E26	9,000	155 lm / W	45W - 60W selectable
GI-CC-C250-E26UL4	5000K	E26	9,000	155 lm / W	45W - 60W selectable
GI-CC-360CCT250-UL4	4000K / 5000K selectable	EX39	9,000	155 lm / W	45W - 60W selectable



other


Dimensions	Warranty	Gross Weight	Case QTY
9.72" (L) x 3.46" (D)	6 years	2.38 lbs	12 pcs

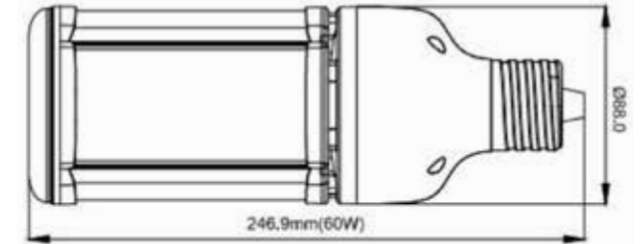


**Features**

- ▶ 6 Year warranty
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Shatterproof


Luminous Intensity Distribution

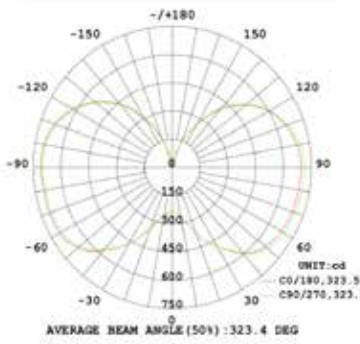

Distance vs Illumination

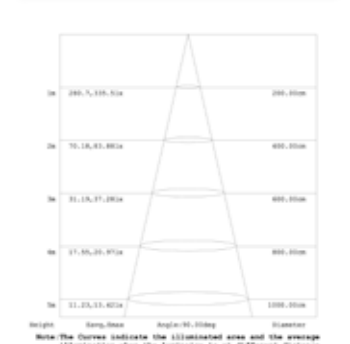

Isolux Diagram

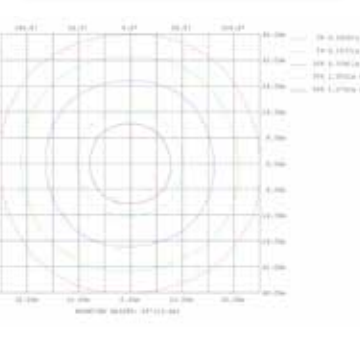

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

