


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1 | 50-00028 | Connector, dc plug, 4.75x1.7xL20 mm, EIAJ-3, molding style, spring contacts | 1 | |
| 2 | 30-00395 | Wire, 2C TS, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A | 1 | |
| 3 | 24-00003 | Overmold, PVC | 1 | black |

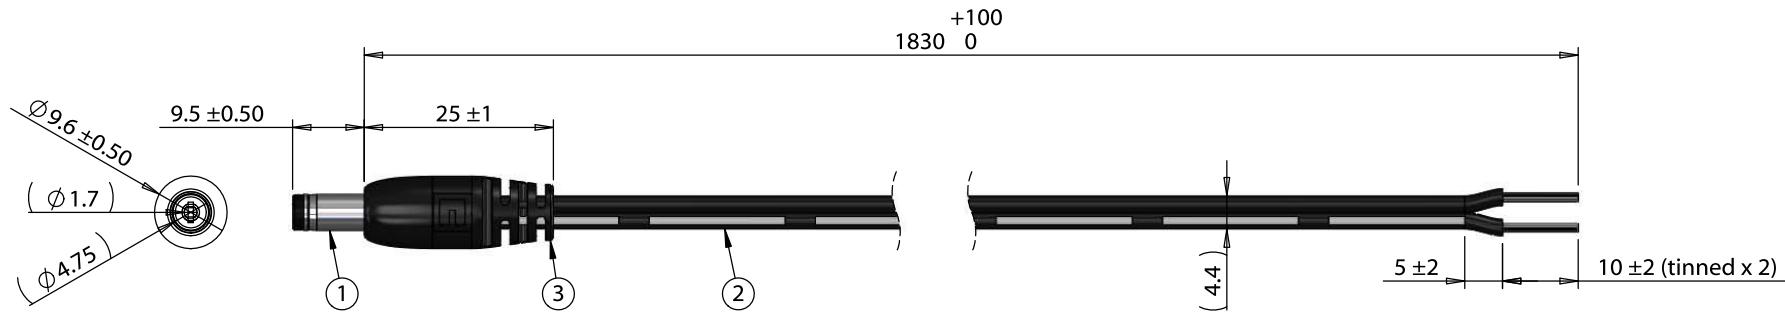

Notes:

Functionally equivalent components may be substituted

| Wiring Diagram | |
|----------------|-------------------|
| 50-00028 | wire color |
| center | black with stripe |
| sleeve | black |

| | | | | | |
|-----------|------------|-----------------|--|--|---|
| Revision: | Date: | Description: | Prepared: GL Digitally signed by GL Date: 2018.02.01 10:49:50 -08'00' | Notes: RoHS compliant Function test: no open, no short circuit, no intermittent | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 02/01/2018 | Initial release | Verified: JP Digitally signed by JP Date: 2018.02.13 14:01:53 -08'00' | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 1830 mm, 4.75x1.7x9.5 mm 50-00028 dc plug to 10 mm tinned, 18 AWG, UL2468, 30-00395 wire |
| | | | | | Size: A Part number: 10-02494 |
| | | | | | Scale: 1:1 Sheet 1 of 1 |