



NS-205AF Series/NSM-205AF Series

4-port 10/100 Mbps Ethernet with 1 Fiber Port Switch



NS-206AF Series/NSM-206AF Series

4-port 10/100 Mbps Ethernet with 2 Fiber Ports Switch

Features

- Provides 1 x 100-FX fiber port for NS-205AF/NSM-205AF series
- Provides 2 x 100-FX fiber ports for NS-206AF/NSM-206AF series
- Full duplex IEEE 802.3x and half duplex backpressure flow control
- Automatic MDI/MDI-X crossover for plug-and-play
- Store-and-forward architecture
- Redundant dual +12 VDC ~ +48 VDC power inputs
- Broadcast Storm protection



Introduction

The NS-206AF/NSM-206AF is a 4-port unmanaged Ethernet with 2 fiber ports switch. Using fiber optics, you can prevent noise from interfering with your system and supports high-speed (100 Mbps) and high-distance (up to 60 km) transmissions.

The NS-205AF/NSM-205AF/NS-206AF/NSM-206AF provides a wide +12 VDC ~ +48 VDC power range to fit all the common power standards found in industrial automation, without external power converters. The wide power input lowers installation and maintenance costs.

Comparison Table of Fiber Switch




Mode Name	NS-205F NS-206F	NSM-205F NSM-206F	NS-205AF NS-206AF	NSM-205AF NSM-206AF
PoE	-			
Input Voltage Range	+10 VDC ~ +30 VDC		+12 VDC ~ +48 VDC	
Operating Temperature	0 °C ~ +70 °C		-30 °C ~ +75 °C	
Casing	Plastic	Metal (IP20)	Plastic	Metal (IP30)
Installation	DIN-Rail Mounting	DIN-Rail Mounting or Wall Mounting	DIN-Rail Mounting	
Dimensions (W x L x H) (Unit: mm)	64 x 118 x 101	73 x 132 x 105	31 x 157 x 123	25 x 168 x 131

Redundant Power Input

Both power inputs can be connected simultaneously to live DC power sources.

If one power source fails, the other live source will act as a backup, and automatically supplies all of NSM-205AF/NSM-206AF series power needs.

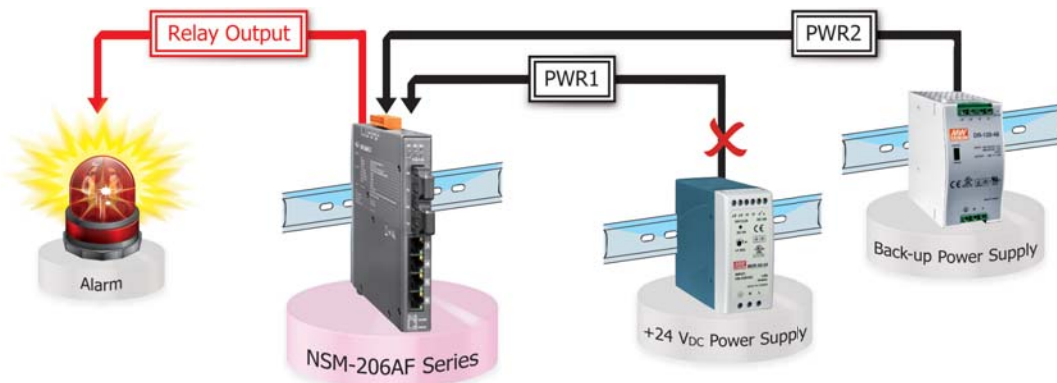

Specifications

Model	NS-205AF Series	NS-206AF Series	NSM-205AF Series	NSM-206AF Series
EMS Protection				
ESD (IEC 61000-4-2)	± 4 kV Contact			
LED Indicators				
Status	PWR1, PWR2, PWR_Fault, Link/Act, 10/100M			
Ethernet				
Ports	4 x RJ-45, 10/100Base-TX			
Standards	IEEE802.3, 802.3u, 802.3x			
Processing Type	Store & forward			
MAC Table	2048			
Frame Buffer Memory	1 Mbit			
Flow Control	IEEE 802.3x flow control			
Isolation	1500 Vrms 1 minute			
Fiber				
Multi-Mode	NS-205AFT-T NS-205AFC-T NSM-205AFT-T NSM-205AFC-T NS-206AFT-T NS-206AFC-T NSM-206AFT-T NSM-206AFC-T	Multi mode fiber cables: 50/125, 62.5/125 or 100/140 μm Distance: 2 km, (62.5/125 μm recommended) for full duplex Wavelength: 1300 or 1310 nm Min. TX Output: -20 dBm Max. TX Output: -14 dBm Max. RX Sensitivity: -32 dBm Min. RX Overload: -8 dBm Budget: 12 dBm		
Single-Mode	NS-205AFCS-T NSM-205AFCS-T NS-206AFCS-T NSM-206AFCS-T	Single-mode fiber cables: 8.3/125, 8.7/125, 9/125 or 10/125 μm Distance: 30 km, (9/125 μm recommended) for full duplex Wavelength: 1300 or 1310 nm Min. TX Output: -15 dBm Max. TX Output: -8 dBm Max. RX Sensitivity: -34 dBm Min. RX Overload: -5 dBm Budget: 19 dBm		
Single-Mode	NS-205AFCS-60T NSM-205AFCS-60T NS-206AFCS-60T NSM-206AFCS-60T	Single-mode fiber cables: 8.3/125, 8.7/125, 9/125 or 10/125 μm Distance: 60 km, (9/125 μm recommended) for full duplex Wavelength: 1300 or 1310 nm Min. TX Output: -5 dBm Max. TX Output: 0 dBm Max. RX Sensitivity: -35 dBm Min. RX Overload: -5 dBm Budget: 30 dBm		
Power				
Reverse Polarity Protection	Yes			
Input Range	+12 ~ +48 VDC (Non-isolation, redundant input)			
Redundant Power Inputs	Yes			
Consumption	0.2 A @ 24 VDC	0.14 A @ 24 VDC	0.2 A @ 24 VDC	0.14 A @ 24 VDC
Alarm Output	Yes, Relay 2 A @ 30 VDC			
Mechanical				
Casing	Plastic (Flammability UL 94V-0)		Metal (IP30 Protection)	
Dimensions (mm)	31 x 157 x 123 (W x L x H)		25 mm x 168 mm x 131 mm	
Installation	DIN-Rail Mounting			
Environment				
Operating Temperature	-30 °C ~ +75 °C			
Storage Temperature	-40 °C ~ +85 °C			
Humidity	10% ~ 90% RH, non-condensing			

Pin Functions for Power Input


External power supply is connected using the removable terminal block:

PWR: Power input and should be connected to the power supply (+)

GND: Ground and should be connected to the power supply (-)


F.G. : F.G. stands for Frame Ground (protective ground). It is optional. If you use this pin, it can reduce EMI radiation; improve EMI performance and ESD protection.

Applications

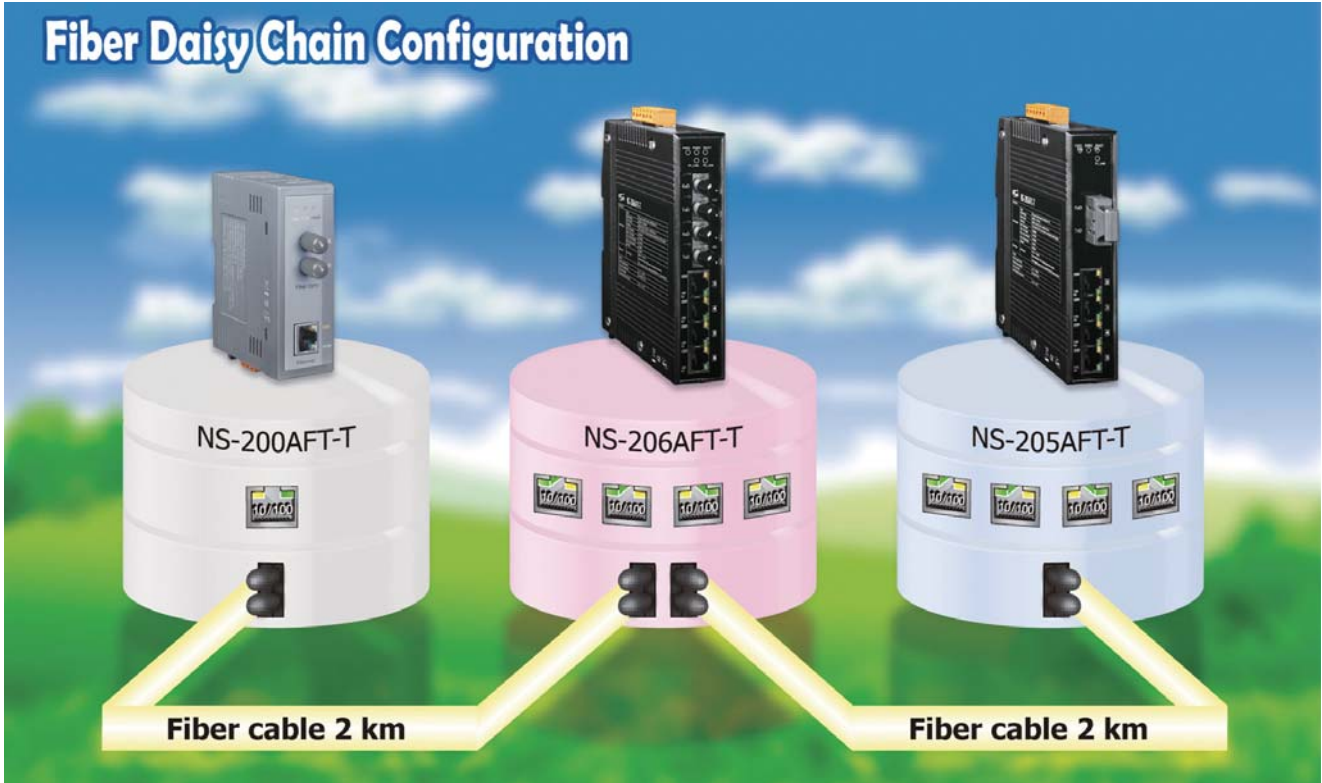


Dimensions (Units: mm)

NS-205AFC-T/NS-205AFCS-T/NS-205AFCS-60T




Left Side View




Front View

NS-206AFC-T/NS-206AFCS-T/NS-206AFCS-60T




Left Side View




Front View

NSM-205AFC-T/NSM-205AFCS-T/NSM-205AFCS-60T

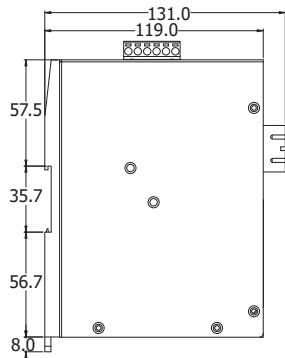


Left Side View

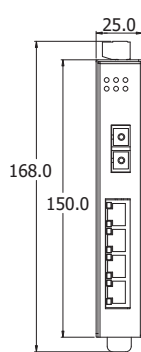


Front View

NSM-206AFC-T/NSM-206AFCS-T/NSM-206AFCS-60T

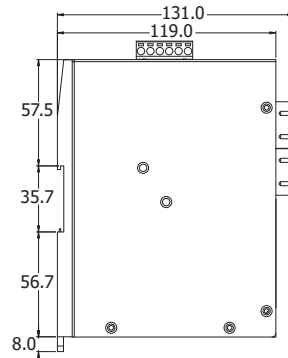

Left Side View

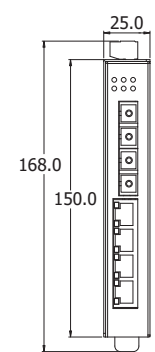

Front View

Ordering Information

NS-205AFT-T CR	Multi-mode, ST Connector, 4-port 10/100 Mbps with 1 Fiber port Switch (RoHS)
NS-205AFC-T CR	Multi-mode, SC Connector, 4-port 10/100 Mbps with 1 Fiber port Switch (RoHS)
NS-205AFCS-T CR	Single-mode 30 km, SC Connector, 4-port 10/100 Mbps with 1 Fiber port Switch (RoHS)
NS-205AFCS-60T CR	Single-mode 60 km, SC Connector, 4-port 10/100 Mbps with 1 Fiber port Switch (RoHS)
NSM-205AFT-T CR	Multi-mode, ST Connector, 4-port 10/100 Mbps with 1 Fiber port Switch; metal case (RoHS)
NSM-205AFC-T CR	Multi-mode, SC Connector, 4-port 10/100 Mbps with 1 Fiber port Switch; metal case (RoHS)
NSM-205AFCS-T CR	Single-mode 30 km, SC Connector, 4-port 10/100 Mbps with 1 Fiber port Switch; metal case (RoHS)
NSM-205AFCS-60T CR	Single-mode 60 km, SC Connector, 4-port 10/100 Mbps with 1 Fiber port Switch; metal case (RoHS)
NS-206AFT-T CR	Multi-mode, ST Connector, 4-port 10/100 Mbps with 2 Fiber ports Switch (RoHS)
NS-206AFC-T CR	Multi-mode, SC Connector, 4-port 10/100 Mbps with 2 Fiber ports Switch (RoHS)
NS-206AFCS-T CR	Single-mode 30 km, SC Connector, 4-port 10/100 Mbps with 2 Fiber ports Switch (RoHS)
NS-206AFCS-60T CR	Single-mode 60 km, SC Connector, 4-port 10/100 Mbps with 2 Fiber ports Switch (RoHS)
NSM-206AFT-T CR	Multi-mode, ST Connector, 4-port 10/100 Mbps with 2 Fiber ports Switch; metal case (RoHS)
NSM-206AFC-T CR	Multi-mode, SC Connector, 4-port 10/100 Mbps with 2 Fiber ports Switch; metal case (RoHS)
NSM-206AFCS-T CR	Single-mode 30 km, SC Connector, 4-port 10/100 Mbps with 2 Fiber ports Switch; metal case (RoHS)
NSM-206AFCS-60T CR	Single-mode 60 km, SC Connector, 4-port 10/100 Mbps with 2 Fiber ports Switch; metal case (RoHS)