



uno[®]
next



台灣精品
TAIWAN EXCELLENCE



Protect your health, starting from indoor air quality

Connected. Smart. Healthy

The UNOnext Indoor Air Quality Monitor can continuously monitor real-time data for seven types of harmful indoor air factors. The detection range includes Carbon Monoxide (CO), Carbon Dioxide (CO₂), Fine Suspended Particulates (PM_{2.5}), and Suspended Particulates (PM₁₀), Formaldehyde (HCHO), Ozone (O₃), Total Volatile Organic Compounds (TVOC) and Temperature, Humidity, Illuminance, etc.

UNOnext not only has a detection function, but it can also independently link ventilation equipment or integrate with central air conditioning. When indoor air quality turns poor, UNOnext immediately sets off an alarm and introduces fresh air to eliminate the bad indoor air. The innovative design of UNOnext also earns extra points for LEED green building standards and WELL healthy building standards.




www.deltaww.com/unonext/en



Features

- Accurately detects indoor air factors that are harmful to health. Comes with third-party laboratory inspection certificate, and provides annual calibration services
- Plug and play, lets you quickly browse real-time indoor environment information
- Provides historical data trend and index analysis, cloud data storage
- Smart linked HVAC/fresh air system improves air quality

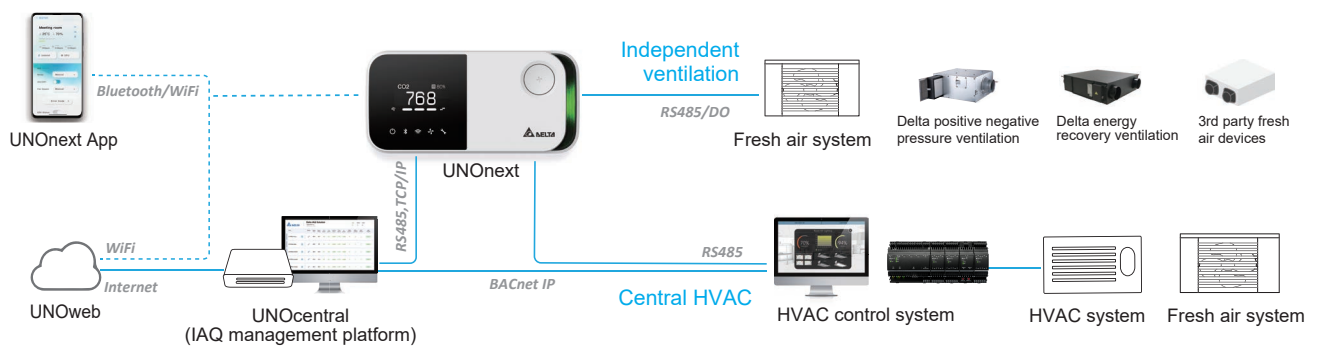

Monitor

Items	Measurement Range	Accuracy
Temperature	0-50°C	±1°C at 25°C and 50% rH
Humidity	0-100% rH	±5% at 25°C and 50% rH
CO ₂	350-10000 ppm	± 30 ppm ± 3%
PM2.5	0-1000 ug/m ³	0-100 ug/m ³ ± 10 ug/m ³ , 100-1000 ug/m ³ ± 10%
PM10	0-1000 ug/m ³	Relative accuracy
Luminance	0-10000 lux	Relative accuracy
HCHO	0-5000 ppb	±15% at 20~50°C
CO	0-500 ppm	±20ppm or ±5%
O ₃	0.5-10 ppm	Relative accuracy
TVOC	0-60000 ppb	±15% in lab test (Ethanol)
Ext. temp.	NTC10k Thermistor	±0.3°C at 25°C and 50% rH

System Operation

Operation range	0°C to 50°C , 10-90% RH, IP20
Storage temp.	-20°C to 70°C
Power requirements	source 1: 9-24VDC+/-10% ; source 2: power adapter 12V/1A
Power consumption	Max 500mA@12VDC
Digital control interface	DO x 4, Modbus RTU x 2
Dimensions	14.2cm(L) x 6.8cm(W) x 4.2 cm(D)
Weight	208 g
Display	1.3"OLED
Accessories	Wall Mount, NTC thermistor (Optional)
Language	Chinese, English, Japan
Connectivity	RS485, Wi-Fi 2.4G 802.11 b/g/n , BLE5.1

Product No.	BLE	Wi-Fi	Temp./Humid.	PM2.5	PM10	CO ₂	Lux	TVOC	HCHO	CO	O ₃ *
UNO-6SR			●	●	●	●	●				
UNO-7TR			●	●	●	●	●	●			
UNO-6SW	●	●	●	●	●	●	●				
UNO-9SW	●	●	●	●	●	●	●	●	●	●	
UNO-7HW	●	●	●	●	●	●	●		●		

* Custom specifications according to project requirements



No. 256, Yang Guang Street, Neihu District, Taipei 11491, Taiwan
 TEL : +886-2-8797-2088
 FAX : +886-2-2659-8731
 Email: uno.sales@deltaww.com

Delta_UNOnext_brochure_eng_202010
 Copyright © 2020 Delta Electronics, Inc. All Rights Reserved.