
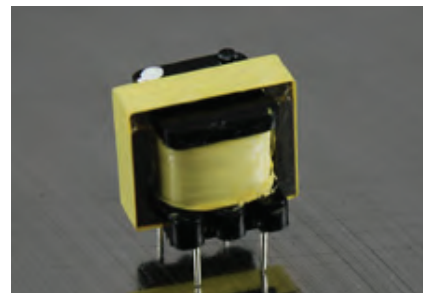



AEE19-3460

High Frequency Transformer

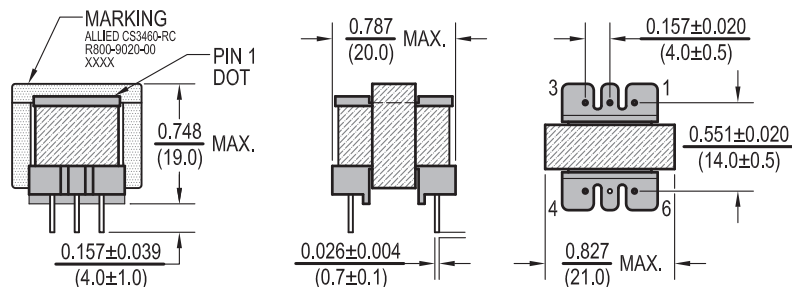

ELECTRICAL SPECIFICATIONS:

1. INDUCTANCE: 1KHz/0.1V (HP-4284A)
 - 1 - 3: 10.0 K OHM \pm 20%
 - 6 - 4: 10 K OHM (LOAD)
2. DCR: (AT 25°C CH-502A)
 - 1 - 3: 820 OHM \pm 20%
 - 6 - 4: 1.08 K OHM \pm 20%
3. HI-POT TEST:
 - PRI TO SEC : AC 1000V 1mA FOR 1 SEC
 - CORE TO COIL : AC 1000V 1mA FOR 1 SEC
4. INSULATION TEST:
 - COIL TO COIL & CORE : 100 mOHM MIN BY DC 500V
5. GAP : CORE CENTER GAP
 - PRI : SEC = 1:1
6. GAP : CORE NO GAP



NOTE:

1. CORE FIX TAPE 2TS
2. PIN 5 CUT OFF
3. PIN 1 DOT

