

- A. Featured Products
- B. Copper Systems
- C. Fiber Systems
- D. Faceplates, Frames & Surface Mount Boxes
- E. Industrial Networks
- F. Audio Video Systems
- G. Keystone Cabling Systems
- H. Zone Cabling
- J. Cable Routing Systems
- K. Surface Raceway
- L. Cabinets & Rack Systems
- M. Power Management
- N. Grounding & Bonding
- O. Identification Products
- P. Cable Management Accessories
- Q. Part Number Index


### ☞ Elastomeric Cable Ties

- Elastic material provides a flexible tie body that safely contours around cable bundle, preventing over-tensioning of data cables to maintain network integrity
- UL 94V-0 material provides greater flame resistance; meets stringent telecommunication flammability requirements (such as NEBS GR-63-CORE)
- Soft material has no sharp edges; protects the installer and the cable bundle
- High coefficient of friction grips and prevents lateral movement along cable bundle
- Releasable and re-usable to accommodate frequent moves, adds, and changes
- Halogen-free, non-toxic, and environmentally safe material will not release toxic or corrosive gases upon combustion
- Locking head design; the tapered tip threads into locking head to speed productivity; industry-accepted intuitive tie design



Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
ERT2M-C20	8.50	216.0	0.50	12.7	0.09	2.3	2.35	59.7	18	80	Hand install only	100	1000
ERT3M-C20	11.00	279.0					3.00	76.2					
ERT4.5M-C20	16.00	406.0					4.50	114					

### Part Number System for Elastomeric Cable Ties

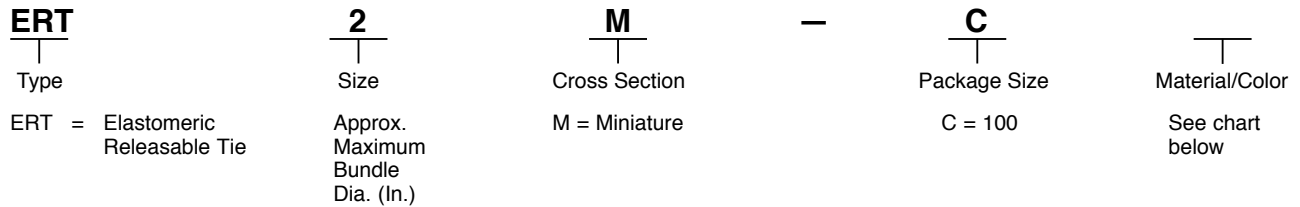

### Material and Color Chart

Material	Color	Panduit Suffix
TPU	Black	20