## REED SWITCH DEVELOPMENTS CORP. 2524 Norwood Court Racine, WI 53403

Ph: (262)883-9060

sales@reedswitchdevelopments.com


	Sensor (Reed) - Specifications	10	91
	Configuration	SPST	
	Form	А	
	Contact Position	CENTER	
	Glass L	7.00	mm
	Glass D	1.80	mm
g	Total L*	46.00	mm
Physical	Wire D	0.45	mm
Ph	Gap Location	CEN	TER
	Mount Spec*	THRU	
	Contact Material	RUTHENIUM	
	Max Vibration Resistance	10	G
	Max Shock Resistance (11ms)	100	G
	Lead Tensile Strength	N/A	KG
	Pull in (+/- 2AT)*	7 - 12	AT
	Drop out*	3 - 16	AT
Operating	Operate Time	0.115	ms
	Bounce Time	0.035	ms
	Release Time	0.035	μs
	Resonant Frequency	17900	Hz
	Max Operating Frequency	N/A	Hz
	Operating Temperature Range	-55 - 105	°C
	Storage Temperature	N/A	°C
	DC Contact Rating	10	W
	AC Contact Rating	N/A	VA
	DC Switching Voltage	170	VDC
	AC Switching Voltage	120	VAC
	DC Switching Current	0.500	А
Electrical	AC Switching Current	0.500	А
	DC Max Carry Current	0.500	А
	AC Max Carry Current	0.500	A
	Min Breakdown Voltage	210	VDC
	Max Initial Contact Resistance	150	mOhm
	Typical Initial Contact Resistance	120	mOhm
	Max Contact Capacitance	0.350	рF
	Min Insulation Resistance	10^6	Ohm

## **SPECIFICATION SHEET**

## 2105-1091-600

Alternate Part Number: AM2105-1091-60-01

Active / Equivalent Part Numbers: 2105-1091-600 - Magnetic Reed Sensor Only AM2105-1091-60-01 - Magnetic Reed Sensor Only

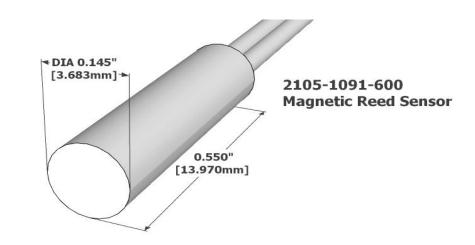

All measurements are in Inches [millimeters]

REV DATE: 10/06/2021

For More Information Visit: <u>www.reedswitchdevelopments.com</u> Or Call Us At: 262-883-9060

Standard Sensor	Actuator -	Min.	Actuation	Distance
-----------------	------------	------	-----------	----------

2110-4902-000	0.06"/1.5mm			
Assembly Certifications				
UL Recognized (File #: E102207)	N			
RoHS / Reach Compliant	Y			
Conflict Free Material	Y			

\* Pre-processed, bare reed element

DISCLAIMER NOTICE: INFORMATION FURNISHED IS PROPRIETARY, AND IS BELIEVED TO BE ACCURATE AND RELIABLE, AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT SHALL BE THE RESPONSIBILITY OF THE BUYER TO ENSURE THAT THE GOODS ARE SUFFICIENT AND SUITABLE FOR THE PURPOSE OR PURPOSES INTENDED (WHETHER BY THE BUYER OR BY ANY THIRD PARTY) AND THAT THEIR CAPACITY AND PERFORMANCE IS NOT ADVERSELY AFFECTED BY ANY ITEMS USED IN THEIR INSTALLATION (WHERE RELEVANT) AND/OR IN CONNECTION WITH THEM.

Cylindrical Smooth

Sensor - Wire/Cable Characteristics (cont.)

Туре

Length

Colors

Gauge

Length

Diameter Material

Conductor Count

Insulation Material

Stranded Copper

Maximum Temp

Housing Characteristics

Wire

YEL

TFE

24 AWG

19 STR

105°C

6.0"/152.4mm

2105

0.550"/13.97mm 0.145"/3.68mm

Celanex 3316

MBE Certified - State of Wisconsin - MFR CAGE CODE: 32604 www.reedswitchdevelopments.com