



M8 Cable Assembly 4-poles st/st f/m



Technische Daten:

Bemessungsspannung: 30 V
IEC 61076-2-104

Strombelastbarkeit: 3 A bei 40°C
IEC 61076-2-104

Isolationswiderstand: >=100 MΩ
IEC 60512

Verschmutzungsgrad: 3/2
IEC 60664-1

Schutzart: IP 67, im
IEC 60529 verschraubten Zustand

Umgebungstemperatur: -25°C ... +80°C
EN 60512-11-10 -40°C
EN 60512-11-4 -40°C ... +85°C
UL 2238 -30°C ... +50°C

Steckzyklen: >=100
IEC 60512-9a

Kabeleigenschaften:

Umgebungstemperatur: -25°C ... +80°C

Kabel: TPU, UL 20549
schwarz,
4x0,25mm², Li9Y11Y

Werkstoffe:

Kontakt: CuZn, Ni3 Au 0,2 gal.

Kontaktträger: PA, UL 94 V-0

Dichtung: FPM


Überwurfmutter/-schraube: GD-Zn, Ni

Griffkörper: TPU, UL 94 HB,
schwarz



Montagedaten:

empfohlenes Drehmoment: 0,4 Nm

female



male

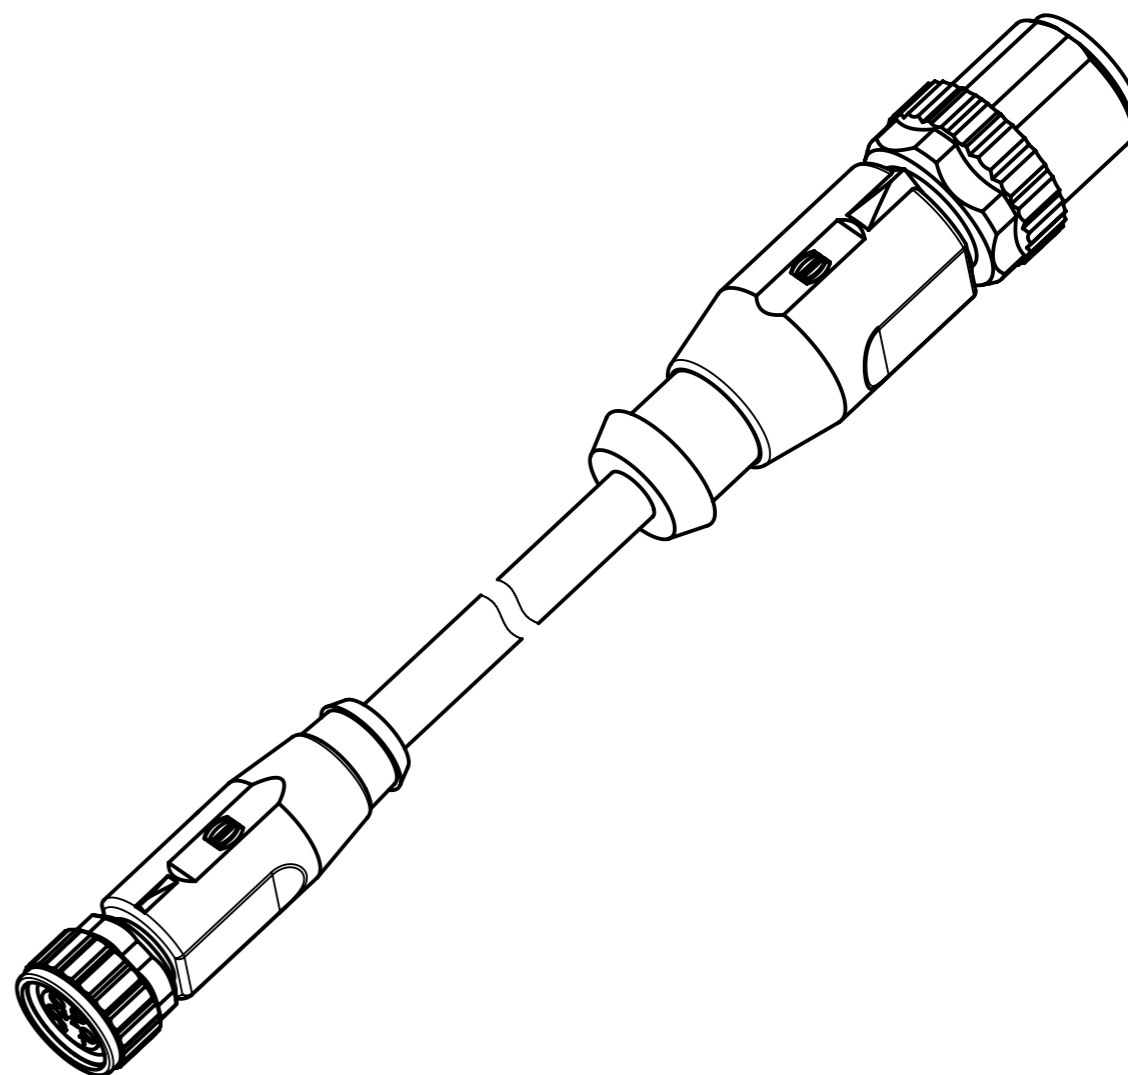

	All rights reserved	Created by STOCHECIC Stocheici	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2019-03-05	State Final Release	
	Department HCS - RO	Title M8 Cable Assembly 4-poles st/st f/m				Doc-Key / ECM-Nr. 100802879/UGD/000/A 500000148324	
HARTING Customised Solutions D-32339 Espelkamp		Type DS	Number 21348081489XXX			Rev. A	Page 1/1

All Dimensions in mm Tech. Character. Free size tol. According to production drawing