


**Class P**

## Features

- Wide input range: 90-305Vac
- Constant power mode operation
- Constant lumen output
- 3-in-1 dimming function (0-10Vdc, PWM Signal, Timer), dim-to-off
- Surge protection: Line-Line 5KV / Line-Earth 10KV
- Output and dimming signal isolated
- Output over-voltage, over-temperature and short-circuit protections
- IP67 enclosure for indoor and outdoor applications
- UL 8750 listed

## Applications

- Roadway lighting, industrial lighting, plant lighting and landscape lighting

## Selection Guide

Part Number	Max Output Power (W)	Output Voltage Range (Vdc)	Full Power Output Voltage Range (Vdc)	Full Power Current Adjustable Range (A)	Default Output Current (A)	Typical Efficiency
LUB075X-041CP	75	20-41	28-41	1.83-2.67	2.10	88%
LUB075X-062CP		38-62	40-62	1.21-1.88	1.40	89%
LUB075X-108CP		54-108	71-108	0.70-1.05	0.70	90%

Note: X in the Part Number can be either M or V, M means 3-in-1 dimming function and offline programmable; V means non-dimmable and output current adjustable via built-in potentiometer.

## Input Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Input Voltage Range	AC input	90	100-277	305	Vac
Input Frequency Range		47	50/60	63	Hz
Input Current	100-277Vac input, full load	-	-	1.1	A
Power Factor	115Vac input, full load	0.97	0.99	-	-
	230Vac input, full load	0.95	0.97	-	
	277Vac input, full load	0.90	0.92	-	
Inrush Current	230Vac input, full load, cold start	-	-	75	A
Leakage Current	277Vac input, 60Hz	-	-	0.7	mA
Standby Power Consumption	M types (dim-to-off))	-	-	2	W
THD	100-240Vac input, 70-100% of full load	-	8	15	%
	277Vac input, 70-100% of full load	-	-	20	

**Output Specifications**

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Output Current Tolerance	Full load	-5	-	+5	%Iset
Output Current Set Point Range LUB075M-041CP LUB075M-062CP LUB075M-108CP		0.27 0.19 0.11	- - -	2.67 1.88 1.05	A
Output Current Set Point Range LUB075V-041CP LUB075V-062CP LUB075V-108CP		1.34 0.94 0.50	- - -	2.67 1.88 1.05	A
Output Current Set Point Range LUB075X-041CP LUB075X-062CP LUB075X-108CP	Constant power	1.83 1.21 0.70	- - -	2.67 1.88 1.05	A
Total Output Current Ripple	230Vac input, full load & LED load, peak-peak	-	5	10	%
Startup Overshoot Current	100-277Vac input, full load & LED load	-	-	10	%Iset
Output Voltage LUB075X-041CP LUB075X-062CP LUB075X-108CP	No load	- - -	- - -	50 70 120	V
Line Regulation	100-277Vac input	-1	-	+1	%
Load Regulation	230Vac input, 60-100% of full load, Ta=25°C±10°C	-3	-	+3	%
Turn-on Delay	115Vac input, full load	-	1	3	s
	230Vac input, full load		0.5	1	
Efficiency LUB075X-041CP Io = 1.83A Io = 2.67A LUB075X-062CP Io = 1.21A Io = 1.88A LUB075X-108CP Io = 0.70A Io = 1.05A	115Vac input, full load	84 84 85 85 86 86	87 87 87 87 88 88	- - - - - -	%
Efficiency LUB075X-041CP Io = 1.83A Io = 2.67A LUB075X-062CP Io = 1.21A Io = 1.88A LUB075X-108CP Io = 0.70A Io = 1.05A	230Vac input, full load	85 85 87 87 88 88	88 88 89 89 90 90	- - - - - -	%
Efficiency LUB075X-041CP Io = 1.83A Io = 2.67A LUB075X-062CP Io = 1.21A Io = 1.88A LUB075X-108CP Io = 0.70A Io = 1.05A	277Vac input, full load	85 85 87 87 88 88	88 88 89 89 90 90	- - - - - -	%

Note: Unless otherwise specified, data in this datasheet should be tested under the conditions of 230Vac input, rated load and Ta=25°C.

### Protection Specifications

Parameter	Notes
Over Voltage Protection	The driver will enter protection mode and will resume normal operation when the fault condition is cleared.
Over Temperature Protection	The output current will decrease, and will return to its set point when the over temperature condition is cleared.
Short-circuit Protection	The driver will enter hiccup/auto recovery mode. No damage will occur when the output is shorted. The output current will return to its set point when the fault condition is cleared.

### Environmental and Other Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Ambient Temperature	Ta	-40	-	+60	°C
Operating Case Temperature	Tc	-40	-	+90	°C
Storage Temperature		-40	-	+85	°C
Storage Relative Humidity		5	-	100	%RH
Isolation Voltage	Input-Output	-	3,750	-	Vac
	Input-PE	-	1,600	-	
	Output-PE	-	1,600	-	
Insulation Resistance	Input-Output/Input-PE/Output-PE, 500Vdc/60s /70%RH	50	-	-	MΩ
Grounding Resistance	25A/60s	-	-	0.1	Ω
Life Time	230Vac, full load, 75°C case temperature	-	50	-	10 <sup>3</sup> hrs
MTBF(MIL-HDBK-217F)	230Vac input, 80% of full load	-	200	-	10 <sup>3</sup> hrs
Dimensions (L*W*H)	128.6 x 68.0 x 37.0 mm				
Weight	500±100g				


### Dimming Specifications

Parameter	Notes & Conditions	Min	Typical	Max	Unit
Absolute Maximum Voltage	0-10V on the DIM +	-	10	-	V
Source Current	0-10V on the DIM +	-	0.2	0.4	mA
Dimming Output Range	LUB075M-041CP	0.27	-	2.67	A
	LUB075M-062CP	0.19	-	1.88	
	LUB075M-108CP	0.11	-	1.05	
Dimming Range		0	-	10	V
PWM	High Level	9.7	-	10.3	V
	Low Level	0	-	0.3	V
	Frequency Range	200	-	2,000	Hz
	Duty Cycle	1	-	99	%


### EMC Specifications

Parameter	Standards
EMI	EN55015
	EN61000-3-2, 3
EMS	EN61547
	EN61000-4-2, 3, 4, 5, 6, 11


### Typical V-I Characteristic Curves

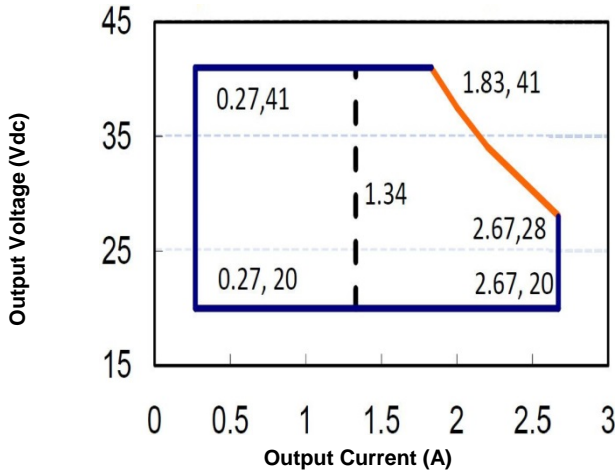

**Figure 1:** Typical V-I Characteristic Curve (LUB075X-041CP)

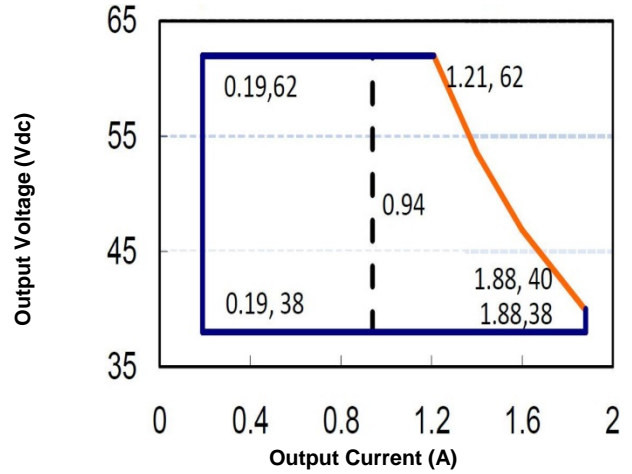

**Figure 2:** Typical V-I Characteristic Curve (LUB075X-062CP)

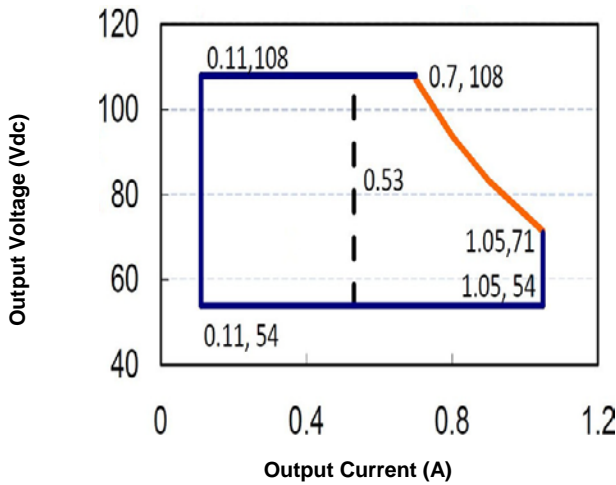

**Figure 3:** Typical V-I Characteristic Curve (LUB075X-108CP)

Note: X=V is suitable for the right area of dotted line, X=M is suitable for the solid line contained area.

### Characteristic Curves

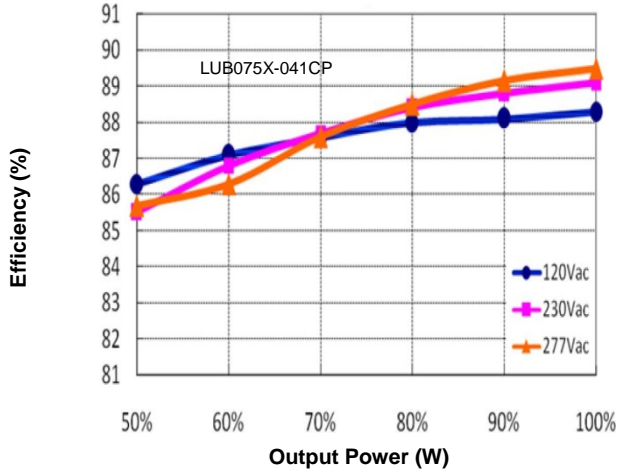


Figure 4: Efficiency vs. Output Power (Io=1.83A)

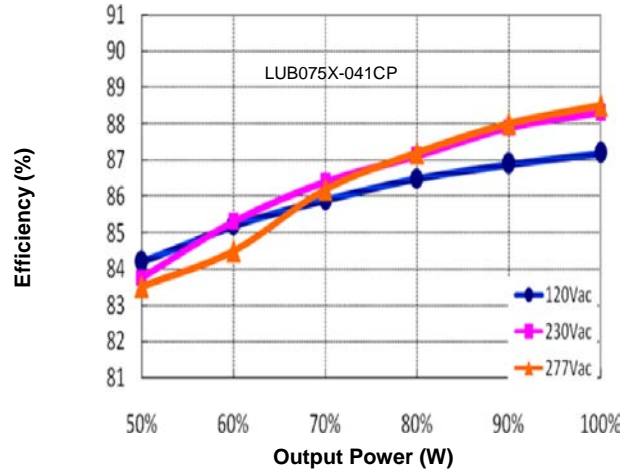


Figure 5: Efficiency vs. Output Power (Io=2.67A)

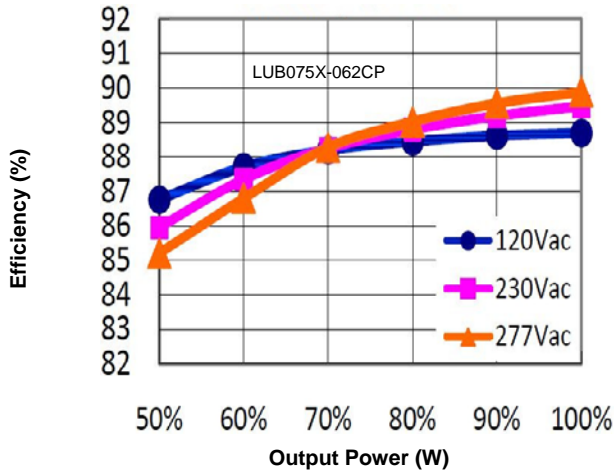


Figure 6: Efficiency vs. Output Power (Io=1.21A)

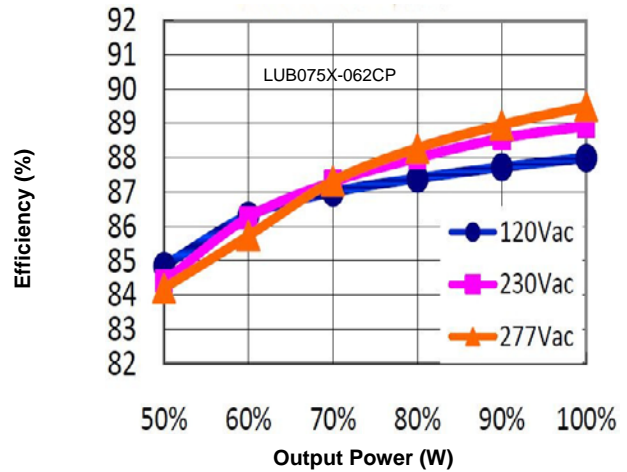


Figure 7: Efficiency vs. Output Power (Io=1.88A)

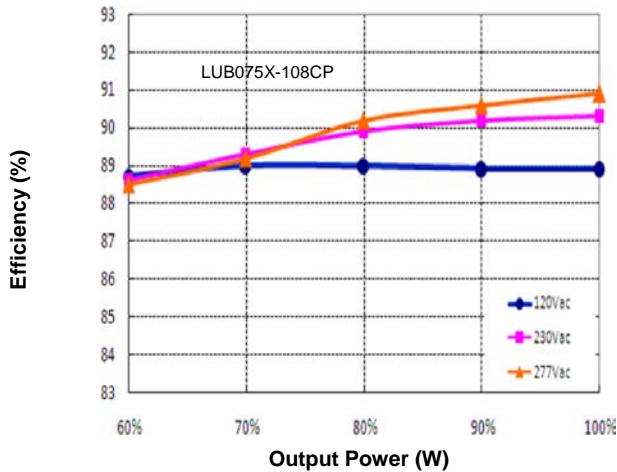


Figure 8: Efficiency vs. Output Power (Io=0.7A)

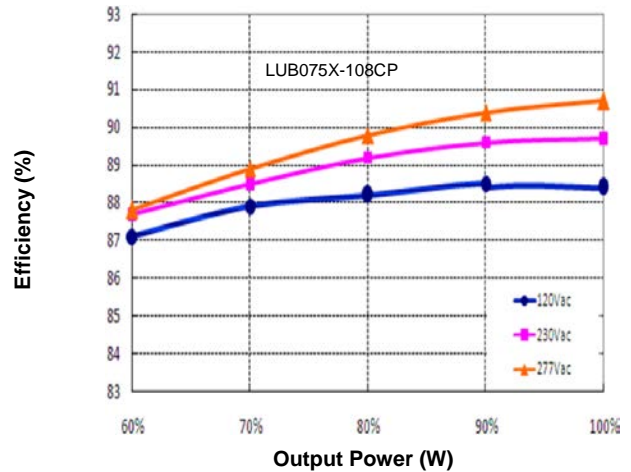


Figure 9: Efficiency vs. Output Power (Io=1.05A)

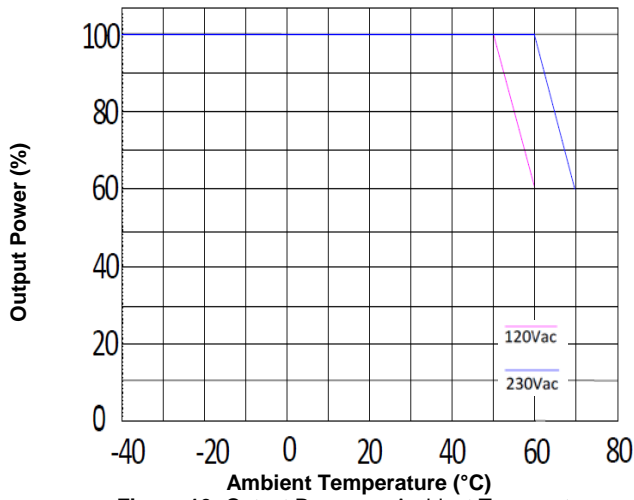


Figure 10: Output Power vs. Ambient Temperature

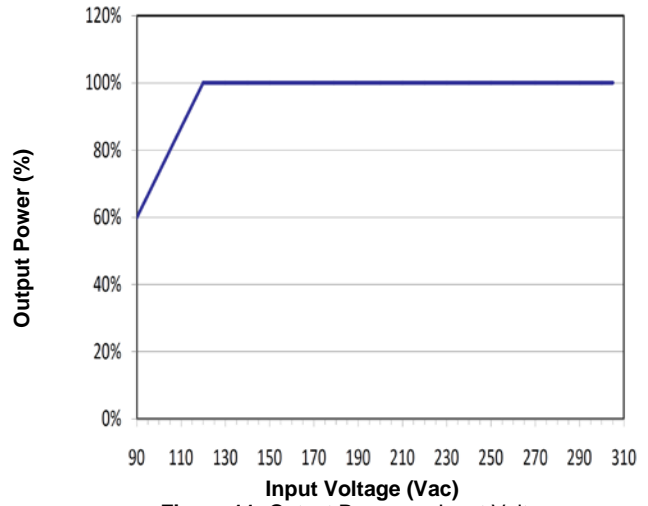


Figure 11: Output Power vs. Input Voltage

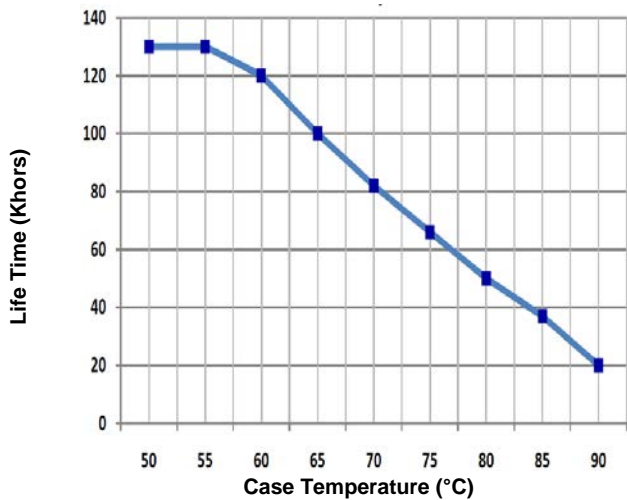


Figure 12: Life Time vs. Case Temperature

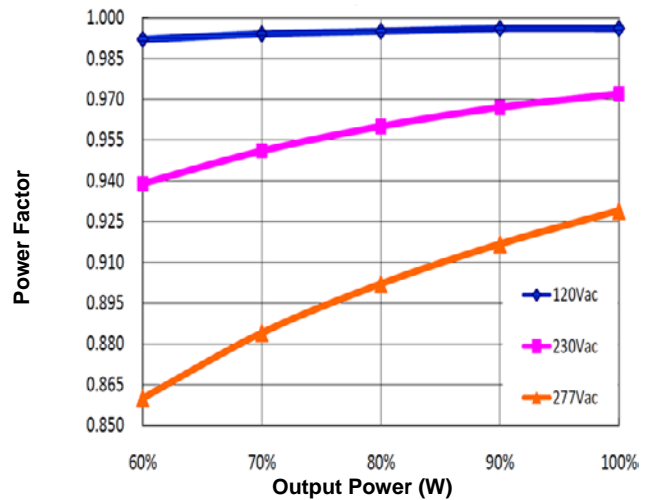


Figure 13: Power Factor vs. Output Power

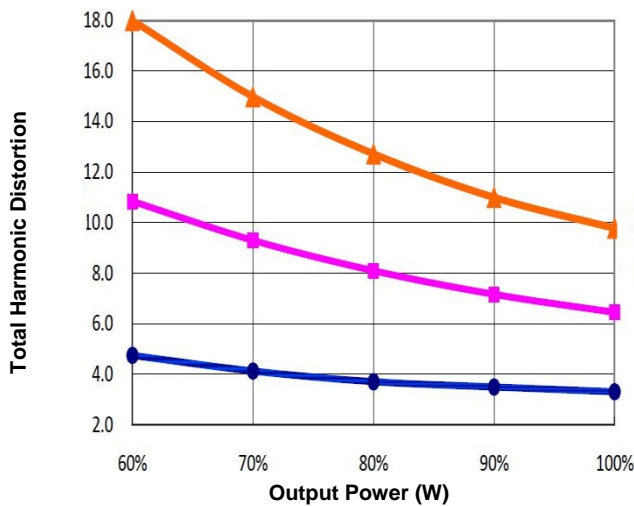


Figure 14: Total Harmonic Distortion vs. Output Power



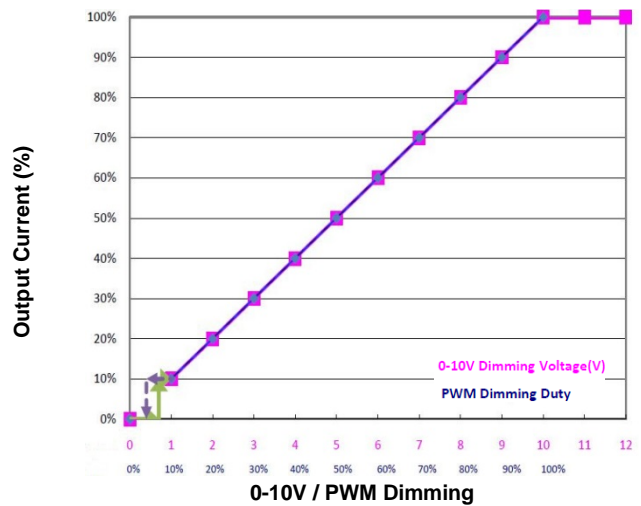


Figure 15: 0-10V/PWM Dimming Curve

## Mechanical Drawing

LUB075V types (Unit: mm)

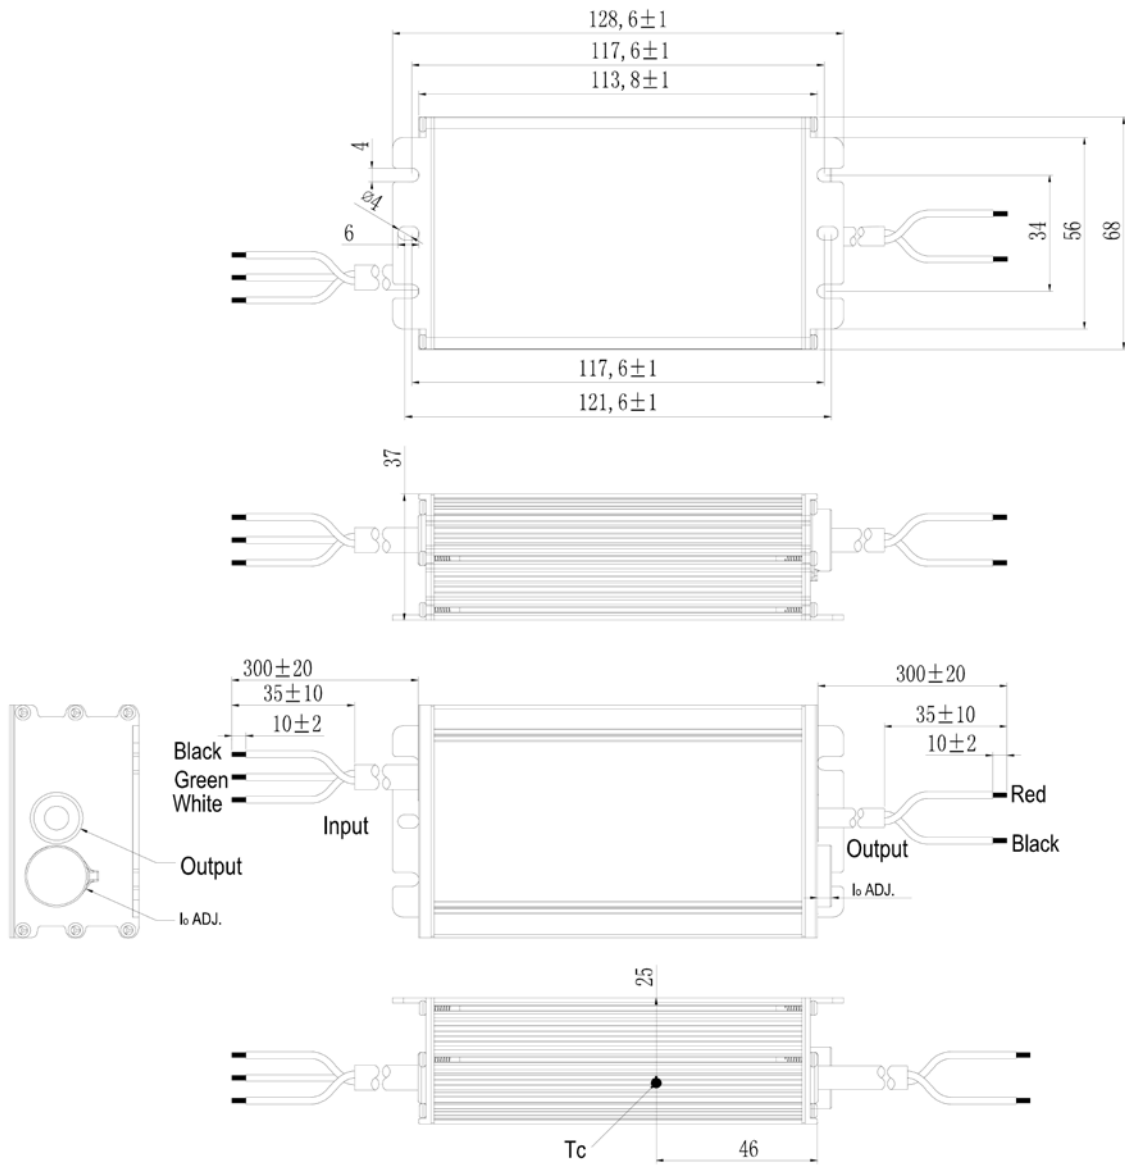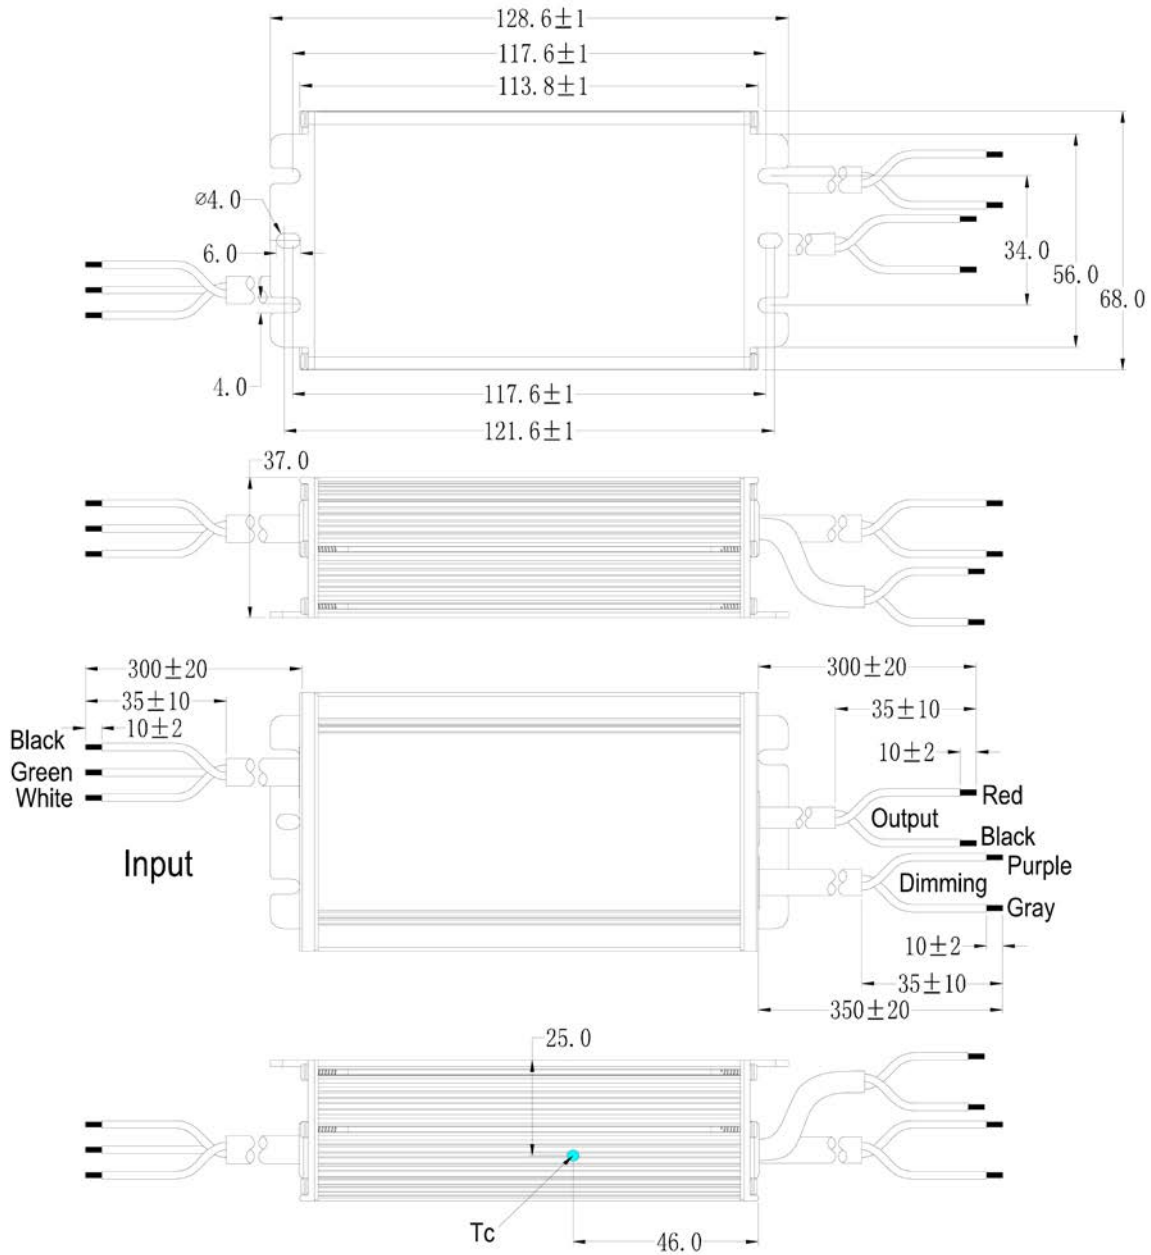

**LUB075M types (Unit: mm)**


Wire	Specification
Input	SJOW 18AWG*3C, 7.8mm external diameter
Output	SJOW 18AWG*2C, 7.3mm external diameter
Dimming (M types)	UL2733 22AWG*2C, 5.45mm external diameter