

NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing



■ Features


1. RoHS & Halogen Free (HF) compliant
2. EIA size: 0201, 0402, 0603, 0805
3. Highly reliable structure
4. Operating temperature range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
5. Wide resistance range
6. Cost effective
7. Agency recognition: UL / cUL / TUV/ CQC



■ Recommended Applications


1. Battery pack
2. Motherboard, notebook and personal computer device
3. Liquid crystal display
4. Cellular phone
5. Bluetooth headset
6. Wi-Fi module

■ Part Number Code

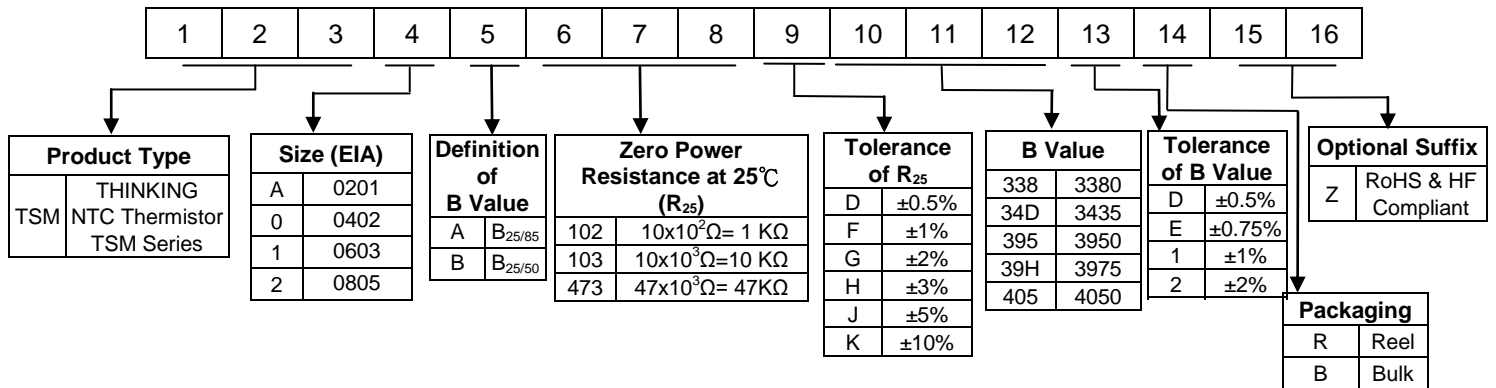

■ Structure and Dimensions

(Unit: mm)

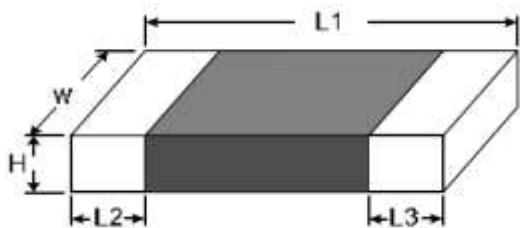

| Part No. | Size (EIA) | L1 | W | H | L2 & L3 |
|----------|------------|-----------------|-----------------|-----------------|-----------------|
| TSM A | 0201 | 0.60 ± 0.03 | 0.30 ± 0.03 | 0.30 ± 0.03 | 0.15 ± 0.05 |
| TSM 0 | 0402 | 1.00 ± 0.15 | 0.50 ± 0.10 | 0.50 ± 0.10 | 0.20 ± 0.10 |
| TSM 1 | 0603 | 1.60 ± 0.15 | 0.80 ± 0.15 | 0.80 ± 0.15 | 0.40 ± 0.15 |
| TSM 2 | 0805 | 2.00 ± 0.20 | 1.25 ± 0.20 | 1.00max. | 0.40 ± 0.20 |

NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing



Electrical Characteristics

| Part No. | Size (EIA) | Zero Power Resistance at 25°C | Tolerance of R25 | B Value | | Tolerance of B value | Max. Power Dissipation at 25°C | Dissipation Factor | Thermal Time Constant | Operating Temperature Range | Safety Approvals | | | | | | | | | |
|---------------|------------|-------------------------------|------------------|----------------------|-------------------|----------------------|--------------------------------|--------------------|-----------------------|-----------------------------|------------------|------|-----------------------|----------|-------------|-------------------------------------|------------|-----|-----|---|
| | | | | R ₂₅ (KΩ) | (±%) | | | | | | (K) | (±%) | P _{max} (mW) | δ(mW/°C) | τ (Sec.) | T _L ~T _U (°C) | UL cUL | TUV | CQC | |
| TSMAB103□338* | 0201 | 10 | 1, 2, 3, 5, 10 | 25/50 | 3380 | 1, 2, 3 | 100 | Approx. 1.4 | Approx. 1.2 | -40 ~ +125 | √ | √ | √ | | | | | | | |
| TSMAB683□425* | | 68 | | | 4250 | | | | | | √ | √ | √ | | | | | | | |
| TSMAB104□425* | | 100 | | | 4250 | | | | | | √ | √ | √ | | | | | | | |
| TSM0A103□34D* | 0402 | 10 | 1, 2, 3, 5, 10 | 25/85 | 3435 | 1, 2, 3 | 170 | Approx. 1.7 | Approx. 2.0 | -40 ~ +125 | √ | √ | √ | | | | | | | |
| TSM0A103□395* | | 10 | | | 3950 | | | | | | √ | √ | √ | | | | | | | |
| TSM0A223□395* | | 22 | | | 3950 | | | | | | √ | √ | √ | | | | | | | |
| TSM0A473□395* | | 47 | | | 3950 | | | | | | √ | √ | √ | | | | | | | |
| TSM0A683□410* | | 68 | | | 4100 | | | | | | √ | √ | √ | | | | | | | |
| TSM0A104□405* | | 100 | | | 4050 | | | | | | √ | √ | √ | | | | | | | |
| TSM0A104□436* | | 100 | | | 4360 | | | | | | √ | √ | √ | | | | | | | |
| TSM0A224□475* | | 220 | | | 4750 | | | | | | √ | √ | √ | | | | | | | |
| TSM0B103□338* | | 10 | | | 0.5,1, 2,3, 5, 10 | | | | | | 25/50 | 3380 | 0.75,1, 2, 3 | 100 | Approx. 1.7 | Approx. 2.0 | -40 ~ +125 | √ | √ | √ |
| TSM0B473□405* | | 47 | | | 1, 2, 3, 5, 10 | | | | | | | 4050 | 1, 2, 3 | | | | | √ | √ | √ |
| TSM0B104□425* | | 100 | | | 0.5,1, 2,3, 5, 10 | | | | | | | 4250 | 0.5,1, 2, 3 | | | | | √ | √ | √ |
| TSM0B104□436* | 100 | 1, 2, 3, 5, 10 | 25/85 | 4360 | 1, 2, 3 | 100 | Approx. 1.7 | Approx. 2.0 | -40 ~ +125 | √ | √ | √ | | | | | | | | |
| TSM0B224□470* | 220 | 4700 | | √ | | | | | | √ | √ | | | | | | | | | |
| TSM0A103□430* | 10 | 3, 5,10 | | 4300 | | | | | | 2,3 | √ | √ | √ | | | | | | | |
| TSM0B102□365* | 1 | 5,10 | 3650 | √ | √ | √ | | | | | | | | | | | | | | |
| TSM0B474□470* | 470 | 3, 5,10 | 25/50 | 4700 | √ | √ | √ | | | | | | | | | | | | | |
| TSM1A202□340* | 0603 | 2 | 1, 2, 3, 5, 10 | 25/85 | 3400 | 1, 2, 3 | 210 | Approx. 2.1 | Approx. 3.1 | -40~+125 | √ | √ | √ | | | | | | | |
| TSM1A472□34D* | | 4.7 | | | 3435 | | | | | | √ | √ | √ | | | | | | | |
| TSM1A472□370* | | 4.7 | | | 3700 | | | | | | √ | √ | √ | | | | | | | |
| TSM1A502□34D* | | 5 | | | 3435 | | | | | | √ | √ | √ | | | | | | | |
| TSM1A502□385* | | 5 | | | 3850 | | | | | | √ | √ | √ | | | | | | | |
| TSM1A682□34D* | | 6.8 | | | 3435 | | | | | | √ | √ | √ | | | | | | | |
| TSM1A103□34D* | | 10 | | | 3435 | | | | | | √ | √ | √ | | | | | | | |
| TSM1A103□39H* | | 10 | | | 3975 | | | | | | √ | √ | √ | | | | | | | |
| TSM1A223□395* | | 22 | | | 3950 | | | | | | √ | √ | √ | | | | | | | |
| TSM1A333□395* | | 33 | | | 3950 | | | | | | 2, 3 | √ | √ | √ | | | | | | |
| TSM1A473□39H* | | 47 | | | 3975 | | | | | | 1, 2, 3 | √ | √ | √ | | | | | | |
| TSM1A503□400* | | 50 | | | 4000 | | | | | | | √ | √ | √ | | | | | | |
| TSM1A683□400* | | 68 | | | 4000 | | | | | | | √ | √ | √ | | | | | | |
| TSM1A104□39H* | | 100 | | | 3975 | | | | | | | √ | √ | √ | | | | | | |
| TSM1A104□405* | | 100 | | | 4050 | | | | | | | √ | √ | √ | | | | | | |
| TSM1A104□436* | | 100 | | | 4360 | | | | | | | √ | √ | √ | | | | | | |
| TSM1A154□406* | | 150 | | | 4060 | | | | | | | √ | √ | √ | | | | | | |
| TSM1A204□410* | | 200 | | | 4100 | | | | | | | √ | √ | √ | | | | | | |
| TSM1A474□415* | | 470 | | | 4150 | | | | | | | 2, 3 | √ | √ | √ | | | | | |

Note 1: □ = Tolerance of R₂₅ * = Tolerance of B value

Note 2: UL&cUL File No. E138827 / TUV File No. R 50167657 / CQC File No.12001080962

Note 3: Special specifications are available upon request

NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing



Electrical Characteristics

| Part No. | Size (EIA) | Zero Power Resistance at 25°C | Tolerance of R25 | B Value | Tolerance of B value | Max. Power Dissipation at 25°C | Dissipation Factor | Thermal Time Constant | Operating Temperature Range | Safety Approvals | | | | |
|----------------|------------|-------------------------------|---------------------|---------|----------------------|--------------------------------|--------------------|-----------------------|-------------------------------------|------------------|------|-----|---|---|
| | | R ₂₅ (KΩ) | (±%) | (K) | (±%) | P _{max} (mW) | δ(mW/°C) | τ (Sec.) | T _L ~T _U (°C) | UL cUL | TUV | CQC | | |
| TSM1B332□365* | 0603 | 3.3 | 1, 2, 3, | 3650 | 1, 2, 3 | 210 | Approx. 2.1 | Approx. 3.1 | -40~+125 | ✓ | ✓ | ✓ | | |
| TSM1B682□395* | | 6.8 | 5, 10 | | | | | | | 3950 | ✓ | ✓ | ✓ | |
| TSM1B103□338* | | 10 | 0.5,1, 2,3, 5, 10 | 3380 | 0.75,1, 2, 3 | | | | | ✓ | ✓ | ✓ | | |
| TSM1B103□420* | | 10 | 1, 2, 3, 5, 10 | 4200 | 1, 2, 3 | | | | | ✓ | ✓ | ✓ | | |
| TSM1B473□425* | | 47 | | 4250 | | | | | | ✓ | ✓ | ✓ | | |
| TSM1B104□359* | | 100 | | 3590 | | | | | | ✓ | ✓ | ✓ | | |
| TSM1B104□425* | | 100 | 0.5, 1, 2, 3, 5, 10 | 4250 | 0.5, 1, 2, 3 | | | | | ✓ | ✓ | ✓ | | |
| TSM1B224□450* | | 220 | 1, 2, 3, 5, 10 | 4500 | 1, 2, 3 | | | | | ✓ | ✓ | ✓ | | |
| TSM1B222□395* | | 2.2 | 3, 5, 10 | 3950 | 2, 3 | | | | | 100 | ✓ | ✓ | ✓ | |
| TSM1B682□425* | | 6.8 | 5, 10 | 4250 | 3 | | | | | | ✓ | ✓ | ✓ | |
| TSM2A102□320* | 0805 | 1 | 1, 2, 3, 5, 10 | 25/85 | 1, 2, 3 | 240 | Approx. 2.4 | Approx. 5.4 | -40~+125 | ✓ | ✓ | ✓ | | |
| TSM2A222□345* | | 2.2 | | | | | | | | 3450 | ✓ | ✓ | ✓ | |
| TSM2A 502□34D* | | 5 | | | | | | | | 3435 | ✓ | ✓ | ✓ | |
| TSM2A682□34D* | | 6.8 | | | | | | | | 3435 | ✓ | ✓ | ✓ | |
| TSM2A103□34D* | | 10 | | | | | | | | 3435 | ✓ | ✓ | ✓ | |
| TSM2A103□373* | | 10 | | | | | | | | 3730 | ✓ | ✓ | ✓ | |
| TSM2A103□395* | | 10 | | | | | | | | 3950 | ✓ | ✓ | ✓ | |
| TSM2A223□396* | | 22 | | | | | | | | 3960 | ✓ | ✓ | ✓ | |
| TSM2A333□400* | | 33 | | | | | | | | 4000 | ✓ | ✓ | ✓ | |
| TSM2A473□400* | | 47 | | | | | | | | 4000 | ✓ | ✓ | ✓ | |
| TSM2A104□400* | | 100 | | | | | | | | 4000 | ✓ | ✓ | ✓ | |
| TSM2A104□455* | | 100 | | | | | | | | 4550 | ✓ | ✓ | ✓ | |
| TSM2A334□41H* | | 330 | | | | | | | | 4175 | ✓ | ✓ | ✓ | |
| TSM2B103□395* | | 10 | | | | | | | | 25/50 | 3950 | ✓ | ✓ | ✓ |
| TSM2B104□425* | | 100 | | | | | | | | | 4250 | ✓ | ✓ | ✓ |

Note 1: □ = Tolerance of R₂₅
 * = Tolerance of B value

Note 2: UL&cUL File No. E138827 / TUV File No. R 50167657 / CQC File No.12001080962


Note 3: Special specifications are available upon request

NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing



Max. Power Dissipation Derating Curve

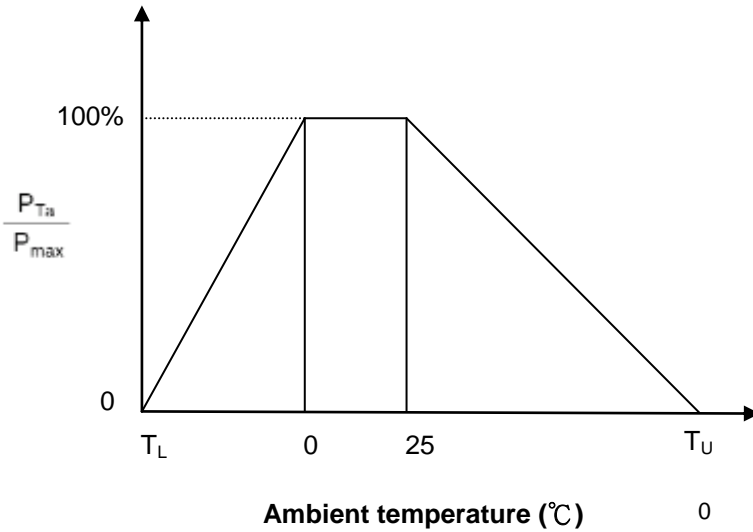

T_U : Maximum operating temperature (°C)

T_L : Minimum operating temperature (°C)



For example:

Ambient temperature (T_a) = 55°C

Maximum operating temperature (T_U) = 125°C

$$P_{Ta} = \frac{(T_U - T_a)}{(T_U - 25)} \times P_{max} = 70\% P_{max}$$

R-T Characteristic Curves



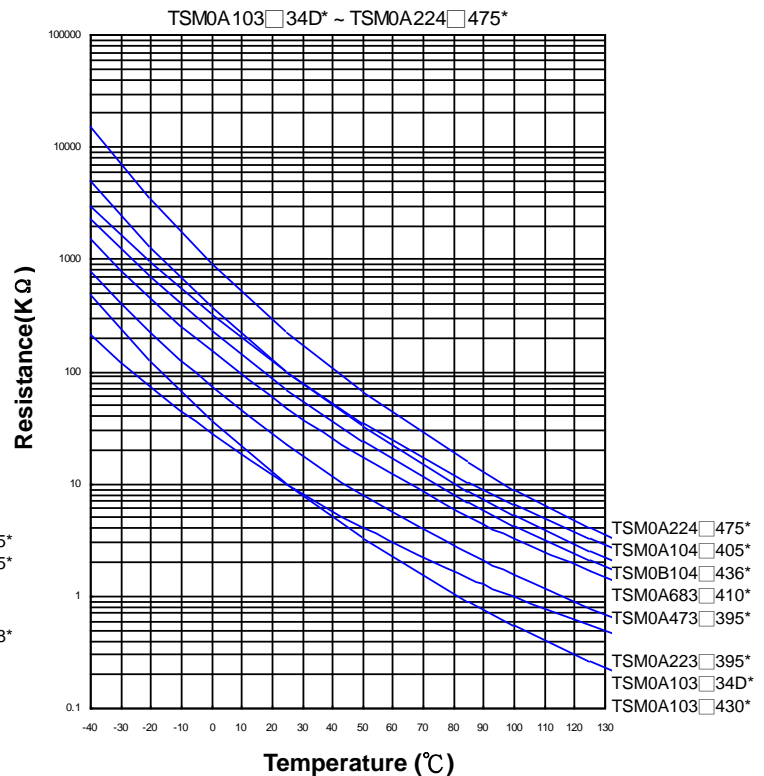
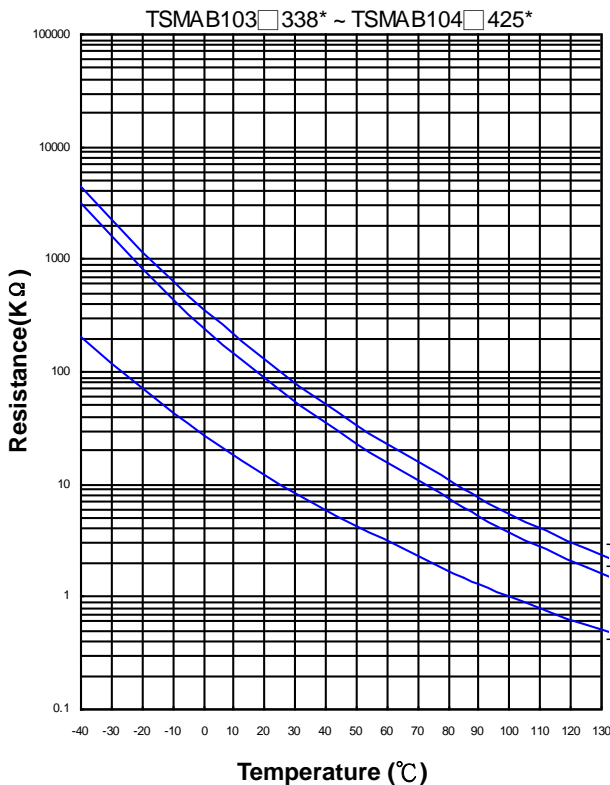


NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing



R-T Characteristic Curves

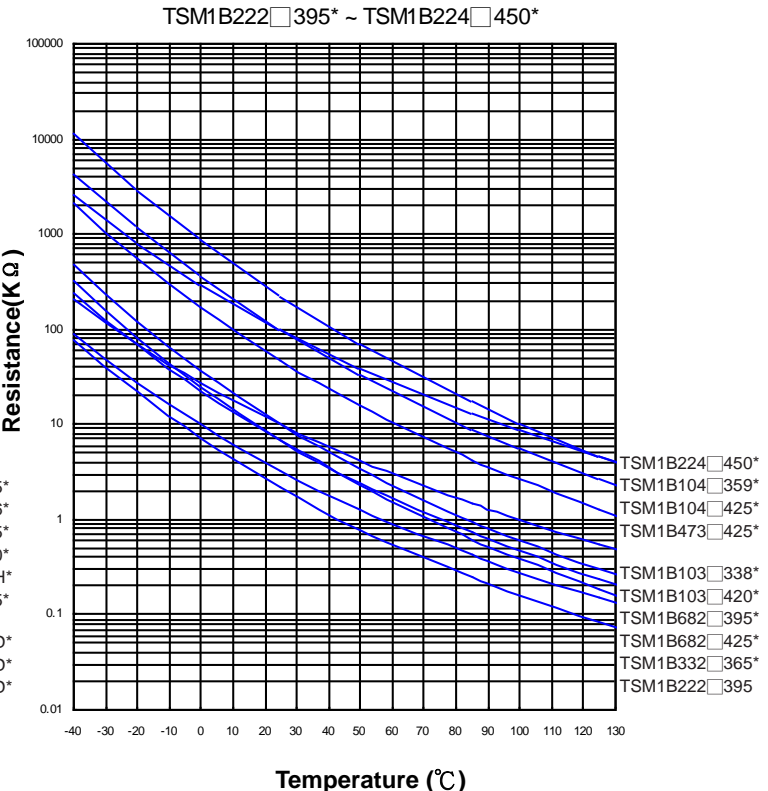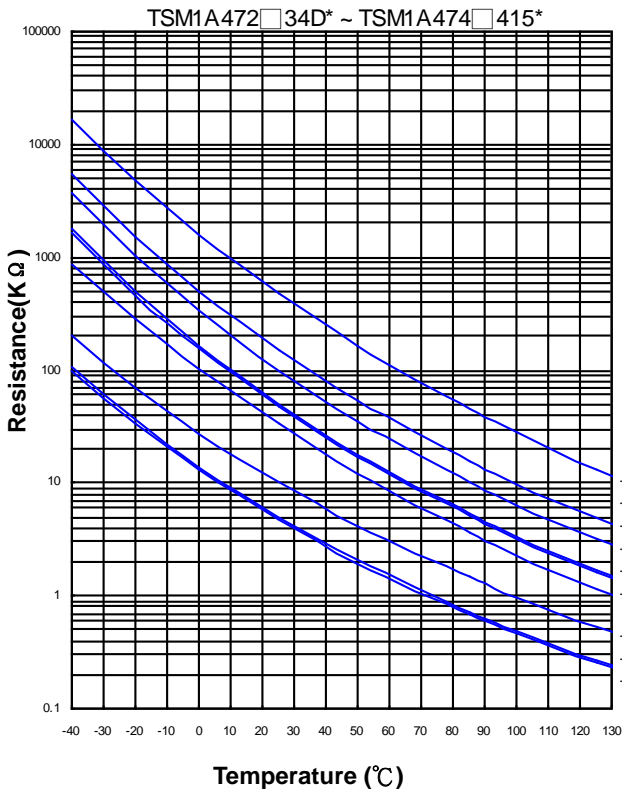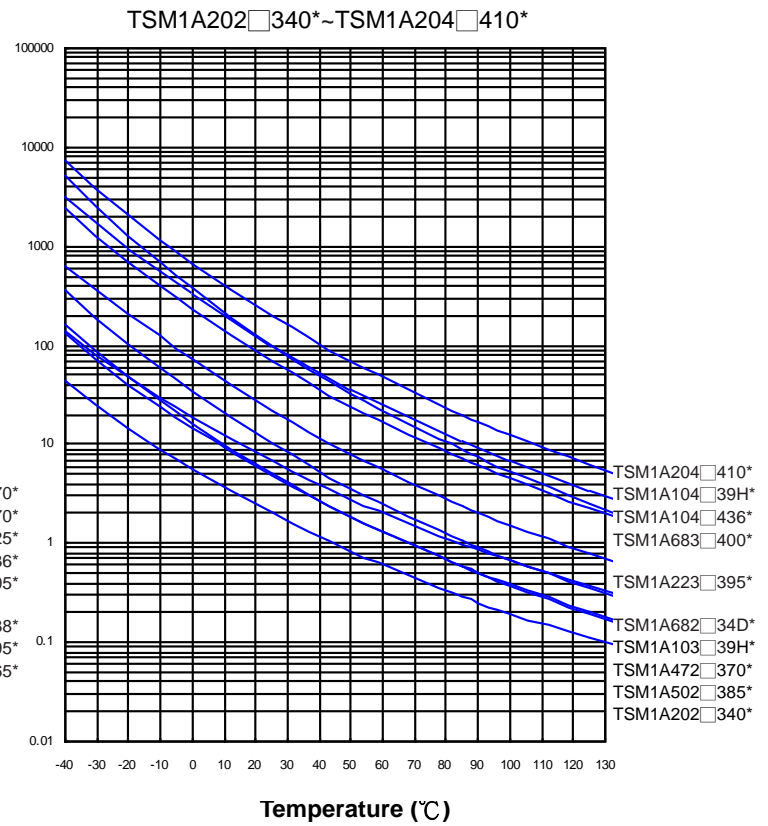
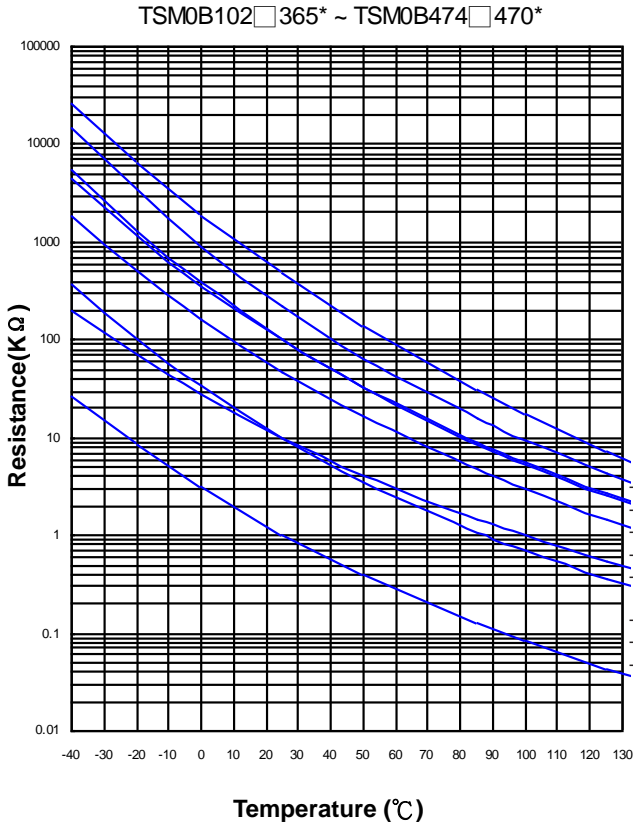


NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing




■ R-T Characteristic Curves

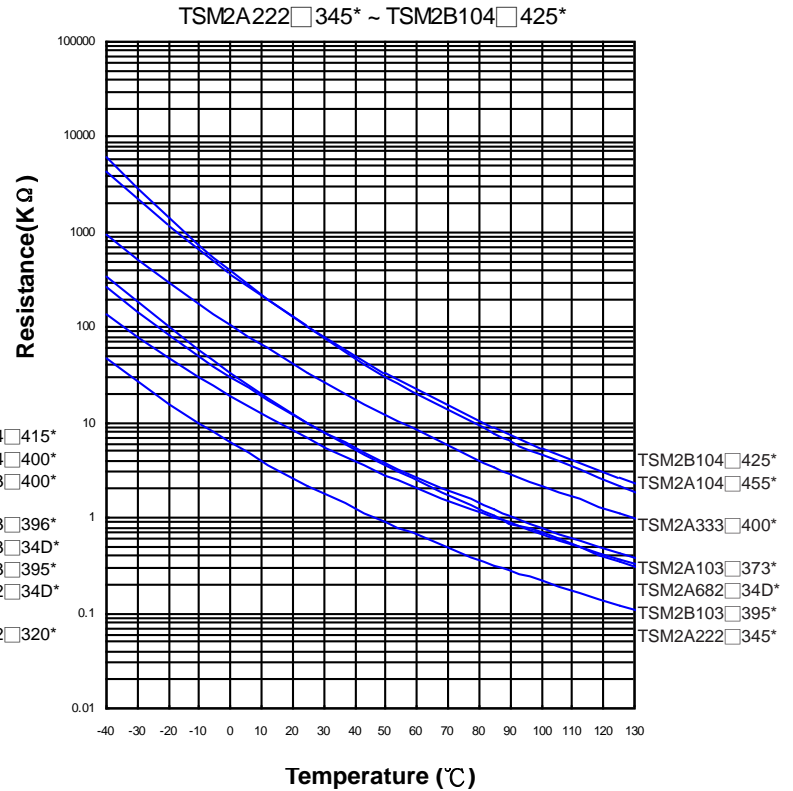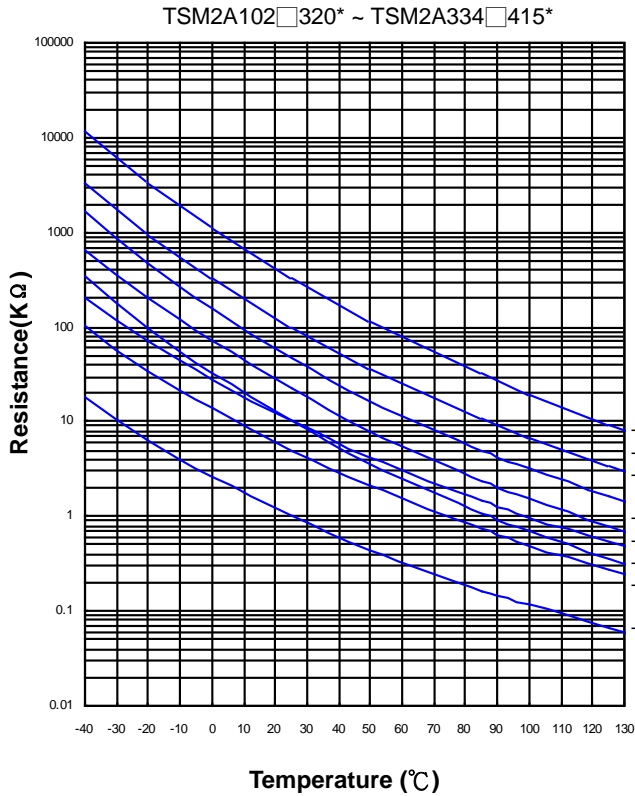

■ Soldering Recommendation

● IR-Reflow Soldering Profile

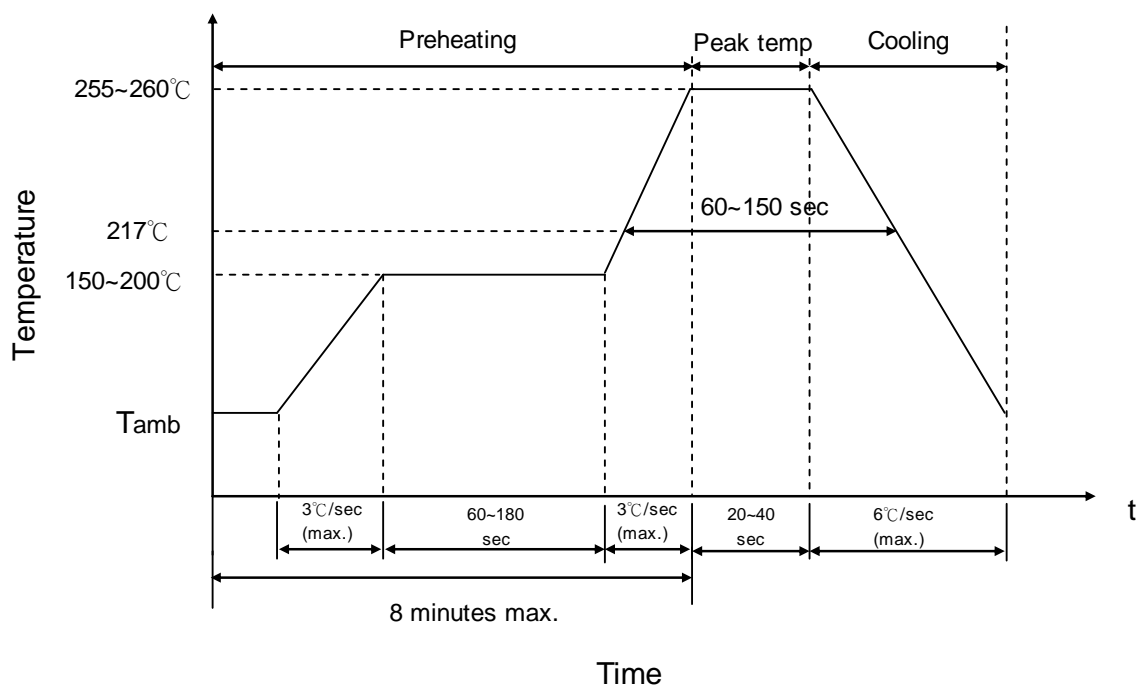

NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing




- Recommended Reworking Conditions with Soldering Iron

| Item | Conditions |
|-----------------------------------|---------------|
| Temperature of Soldering Iron-tip | 360°C (max.) |
| Soldering Time | 3 sec. (max.) |
| Diameter of Soldering Iron-tip | Φ3mm (max.) |

Caution: Please do not touch the component surface with soldering iron directly to avoid its damage.

- Recommended Soldering Pad Dimensions

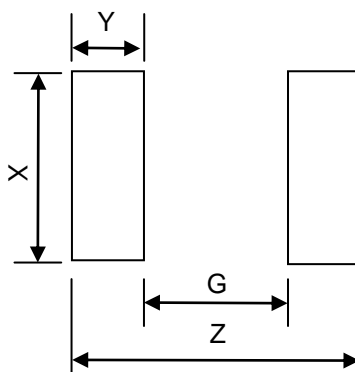


| Size (EIA) | Z (mm) | G (mm) | X (mm) | Y (mm) |
|------------|--------|--------|--------|--------|
| 0201 | 0.8 | 0.3 | 0.3 | 0.25 |
| 0402 | 1.7 | 0.5 | 0.6 | 0.6 |
| 0603 | 2.8 | 0.8 | 1.0 | 1.0 |
| 0805 | 3.4 | 1.0 | 1.4 | 1.2 |

NTC Thermistor : TSM Series


SMD Type NTC Thermistor for Temperature Sensing



■ Notice of Soldering and Mounting on PC Board

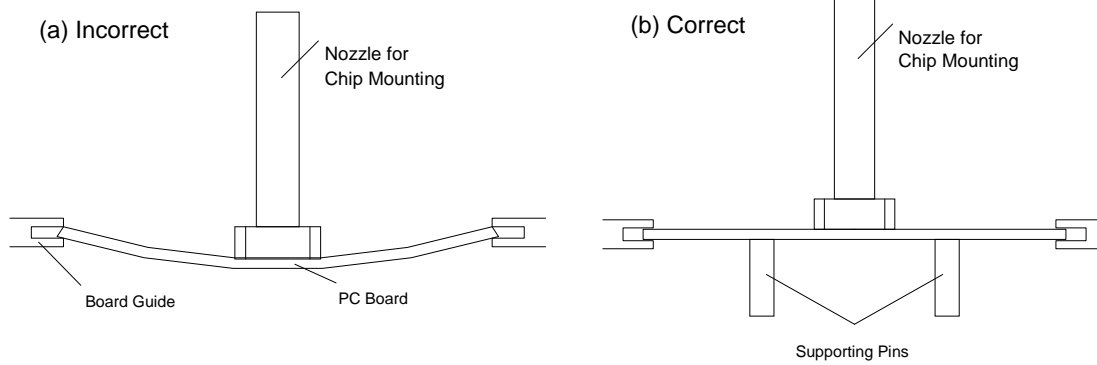


For mounting SMDs on a PC board, supporting pin is suggested for use (refer to figure b) to avoid cracks caused by external stress (refer to figure a).

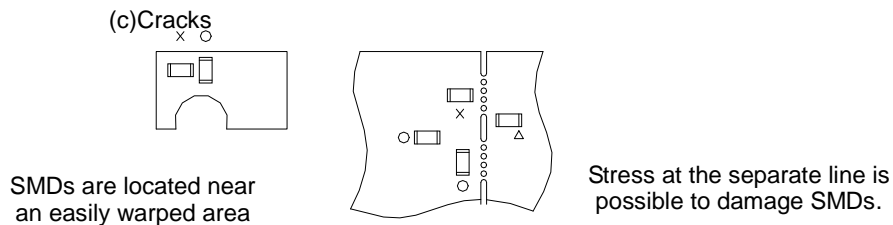

If circuit bending is needed for PC board design, please refer to figure (c) for mounting positions to avoid cracks caused by stress imposed on the product. O means better, Δ is acceptable, and X is worst.

(d) Component Orientation

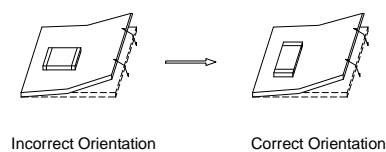

Locate SMDs horizontally to the direction that stress acts

During circuit bending, please locate SMDs horizontally to the direction in which stress act to avoid its cracks (refer to figure d).

NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing



■ Reliability

| Item | Standard | Test conditions / Methods | Specifications | | | | | | | | | | | | | | | |
|------------------------------|-----------------------|--|---|------------------|------------------|---|---------|--------|---|------------------|-------|---|---------|--------|---|------------------|-------|--|
| Bending Strength | IEC 60068-2-21 | Warp : 2mm for 0402,0603 and 0805 1mm for 0201 Speed < 0.5mm/sec. Duration: 10 sec. on PCB | No visible damage $ \Delta R_{25}/R_{25} \leq 5\%$ | | | | | | | | | | | | | | | |
| Solderability | IEC 60068-2-58 | 245 ± 5°C, 3 ± 0.3 sec. | At least 95% of terminal electrode is covered by new solder | | | | | | | | | | | | | | | |
| Resistance to Soldering Heat | IEC 60068-2-58 | 260 ± 5°C, 10 ± 1 sec. | No visible damage $ \Delta R_{25}/R_{25} \leq 3\%$ | | | | | | | | | | | | | | | |
| High Temperature Storage | IEC 60068-2-2 | 125 ± 5°C, 1000 ± 24 hrs | No visible damage $ \Delta R_{25}/R_{25} \leq 5\%$ | | | | | | | | | | | | | | | |
| Damp Heat, Steady State | IEC 60068-2-78 | 40 ± 2°C, 90~95% RH, 1000 ± 24 hrs | No visible damage $ \Delta R_{25}/R_{25} \leq 3\%$ | | | | | | | | | | | | | | | |
| Rapid Change of Temperature | IEC 60068-2-14 | The conditions shown below shall be repeated 5 cycles on PCB. <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Period (minutes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40 ± 5</td> <td>30 ± 3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>5 ± 3</td> </tr> <tr> <td>3</td> <td>125 ± 5</td> <td>30 ± 3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>5 ± 3</td> </tr> </tbody> </table> | Step | Temperature (°C) | Period (minutes) | 1 | -40 ± 5 | 30 ± 3 | 2 | Room temperature | 5 ± 3 | 3 | 125 ± 5 | 30 ± 3 | 4 | Room temperature | 5 ± 3 | No visible damage $ \Delta R_{25}/R_{25} \leq 3\%$ |
| Step | Temperature (°C) | Period (minutes) | | | | | | | | | | | | | | | | |
| 1 | -40 ± 5 | 30 ± 3 | | | | | | | | | | | | | | | | |
| 2 | Room temperature | 5 ± 3 | | | | | | | | | | | | | | | | |
| 3 | 125 ± 5 | 30 ± 3 | | | | | | | | | | | | | | | | |
| 4 | Room temperature | 5 ± 3 | | | | | | | | | | | | | | | | |
| Max. Power Dissipation | IEC 60539-1 4.26.3 | 25 ± 5°C, Pmax., 1000 ± 24 hrs | No visible damage $ \Delta R_{25}/R_{25} \leq 5\%$ | | | | | | | | | | | | | | | |


NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing




Packaging

● Taping Specification

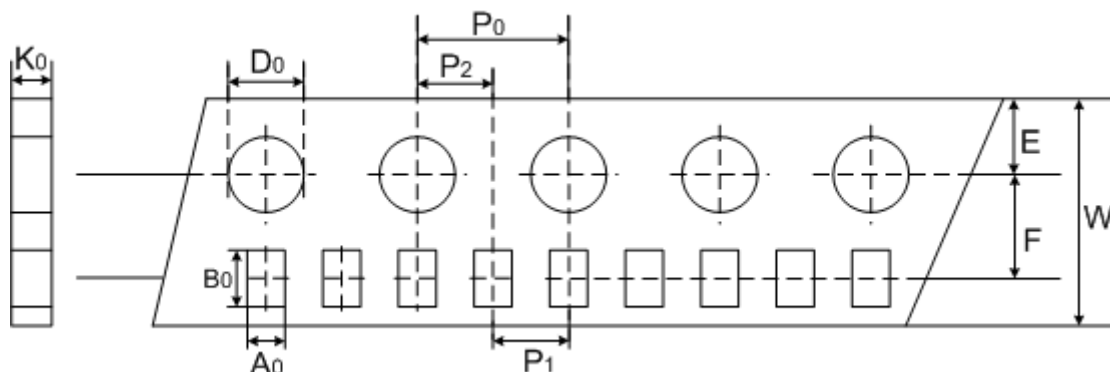

(Unit: mm)

| Index Size | A ₀ | B ₀ | W | E | F | P ₁ | P ₂ | P ₀ | D ₀ | K ₀ |
|---------------|----------------|----------------|------|------|-------|----------------|----------------|----------------|----------------|----------------|
| 0201 | ±0.05 | ±0.12 | ±0.2 | ±0.1 | ±0.05 | ±0.1 | ±0.05 | ±0.1 | ±0.1 | ±0.1 |
| 0402 | 0.62 | 1.12 | 8 | 1.75 | 3.5 | 2 | 2 | 4 | 1.55 | 0.60 |

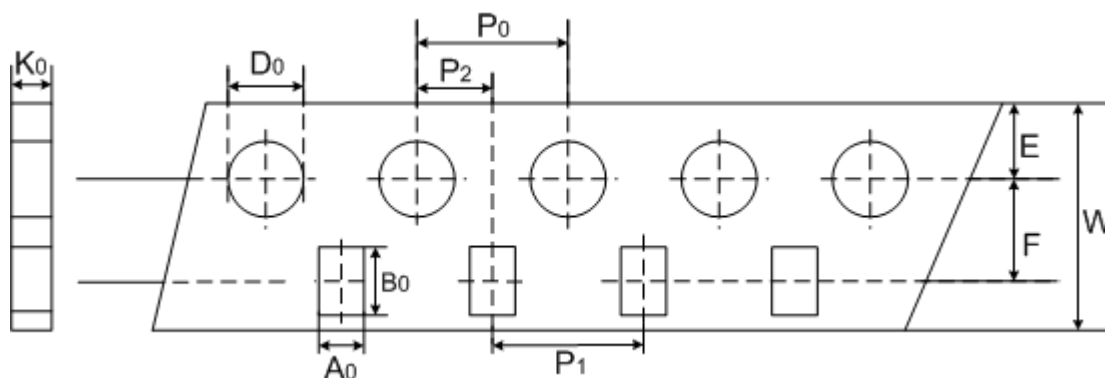

(Unit: mm)


| Index Size | A ₀ | B ₀ | W | E | F | P ₁ | P ₂ | P ₀ | D ₀ | K ₀ |
|---------------|----------------|----------------|------|------|-------|----------------|----------------|----------------|----------------|----------------|
| 0603 | ±0.2 | ±0.2 | ±0.2 | ±0.1 | ±0.05 | ±0.1 | ±0.05 | ±0.1 | ±0.1 | ±0.1 |
| 0805 | 1.5 | 2.3 | 8 | 1.75 | 3.5 | 4 | 2 | 4 | 1.55 | 1.0 |

NTC Thermistor : TSM Series

SMD Type NTC Thermistor for Temperature Sensing



■ Quantity

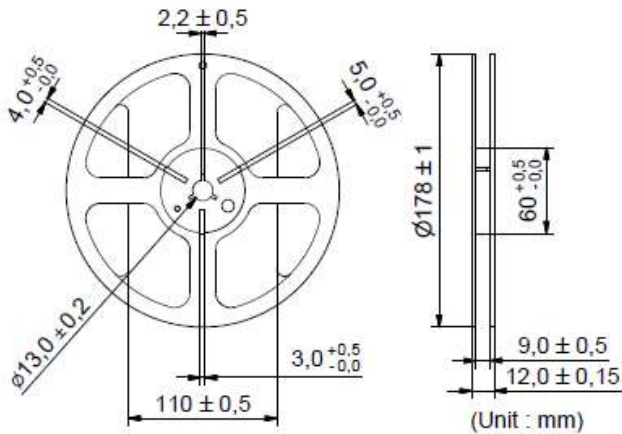

| Size (EIA) | Quantity (pcs/reel) |
|------------|---------------------|
| 0201 | 15,000 |
| 0402 | 10,000 |
| 0603 | 4,000 |
| 0805 | 3,500 |

■ Warehouse Storage Conditions of Products

■ Storage Conditions :

1. Storage Temperature: $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$
2. Relative Humidity: $\leq 75\% \text{RH}$
3. Keep away from corrosive atmosphere and sunlight.

■ Period of Storage : 1 year