



## Part Number:TOP125

3.18mm[0.125inch] test pitch


Probe Specifications	
Minimum Center:	3.18mm[0.125inch]
Full Stroke:	6.35mm[0.25inch]
Recommended Stroke:	4.25mm[0.167inch]
Spring Force:	100g[3.527oz]
Impedance:	15milliohms
Current:	3Amp
Temperature:	-55°C to 120°C [-67°F to 248°F]
Spring Life:	1000K cycles
Diameter Tolerance:	±0.01mm[±0.39mil]
Length Tolerance:	±0.10mm[±3.93mil]
Straightness Tolerance:	0.05mm[±1.97mil]

Materials Specifications	
Plunger:	SK-4, BeCu, Au plating treatment
Spring:	Music wire, Au plating treatment
Barrel:	Phosphor Copper, Au plating treatment


### Spring Force

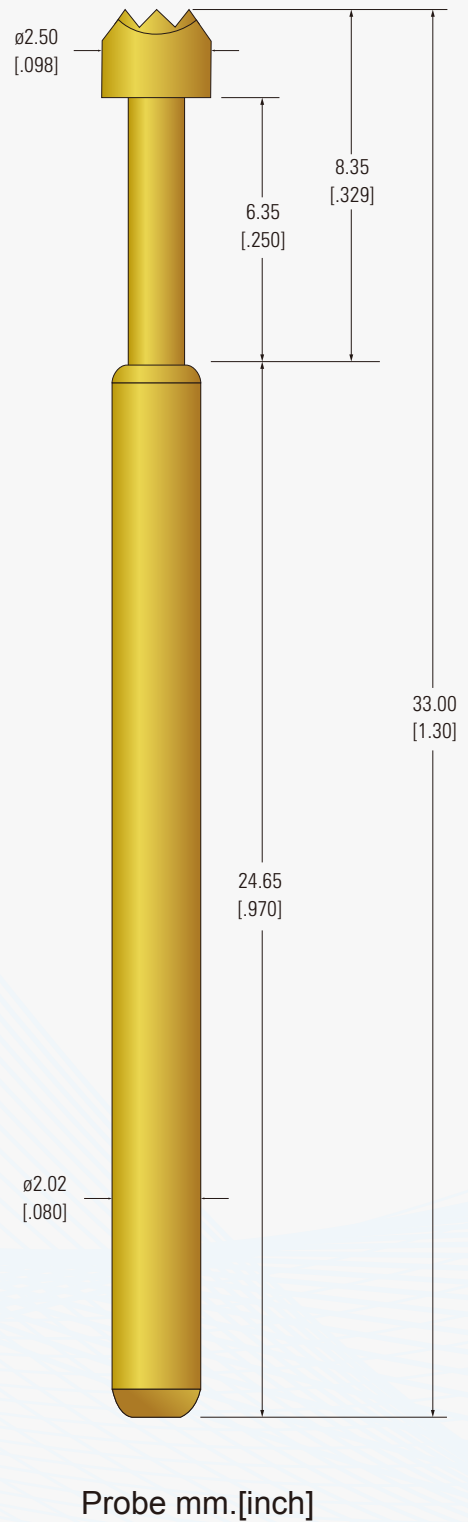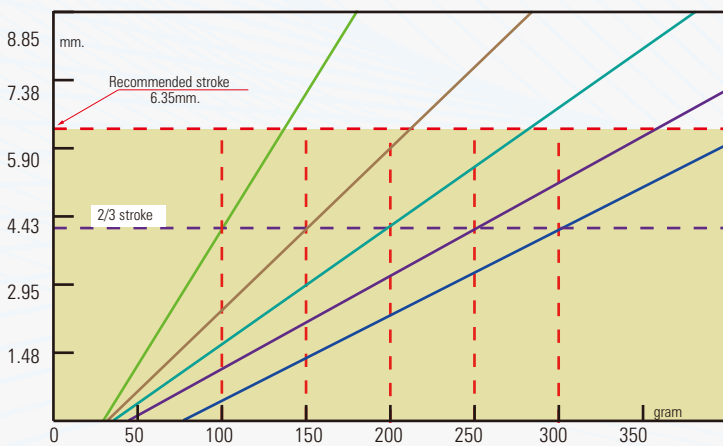


## Receptacle mm.[inch]

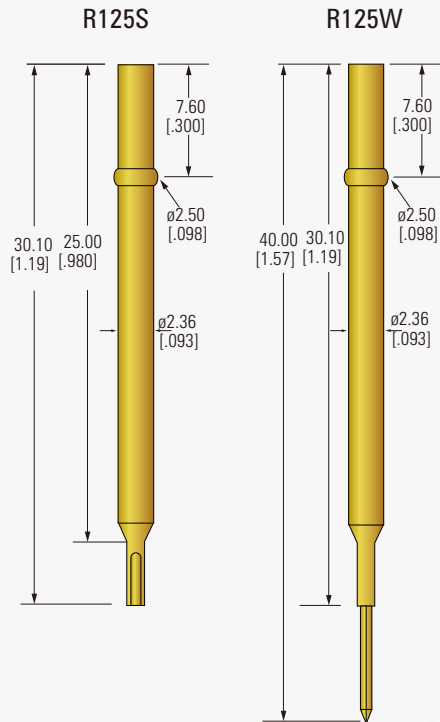

## Fixture Drilling Measurement

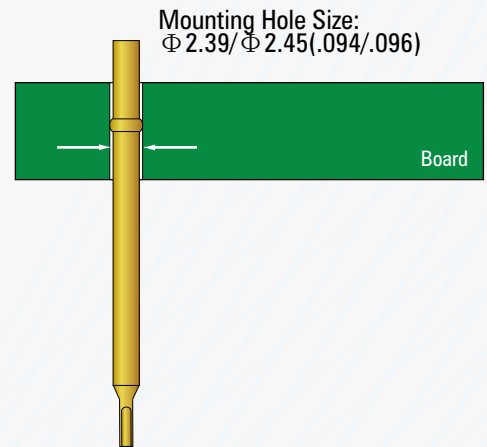

## Tip Style

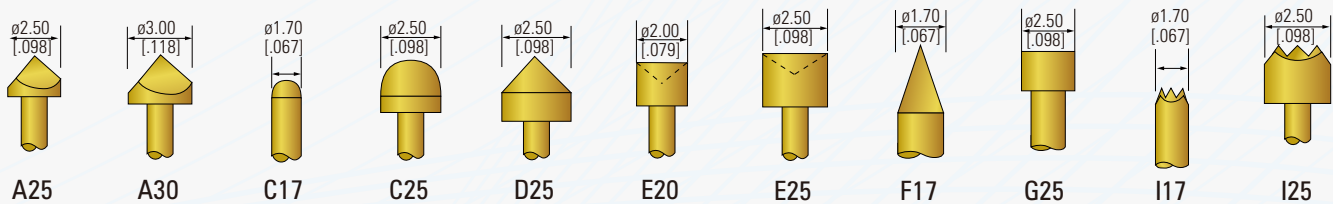

## How to order

TOP	125	I	25	200G
<b>Series Name</b> TOP=Normal ICT Probe CTOP=High Current Probe BP=Battery Probe FTOP=Frequency Probe ATOP=Automotive Probe SWTOP=Switch Probe	<b>Test Pitch Number</b> 125=125mil test pitch	<b>Head Style Code</b> I=9 points crown C=Round more...	<b>Head Diameter</b> 25=2.5mm=0.098inch	<b>Spring Force</b> 100G=100grams=1Newton 200G=200grams=2Newton 250G=250grams=2.5Newton more...