


SOLDERLESS TERMINALS


SPECIFICATIONS: Terminals: EPT Copper Insulation: Vinyl

RING TONGUE NON-INSULATED




| CAT. NO. | WIRE RANGE (AWG) | FOR STUD SIZE | W | L | E | MATL THICK | BARREL I.D. |
|----------|------------------|---------------|-----------|------------|------------|-------------|-------------|
| 8200 | | 6 | .25 (6.4) | .60 (15.2) | .47 (11.9) | | |
| 8201 | 22/18 | 8 | .33 (8.4) | .70 (17.8) | .54 (13.7) | .030 (.76) | .070 (1.78) |
| 8202 | | 10 | .33 (8.4) | .70 (17.8) | .54 (13.7) | | |
| 8203 | | 6 | .25 (6.4) | .60 (15.2) | .47 (11.9) | | |
| 8204 | 16/14 | 8 | .33 (8.4) | .70 (17.8) | .54 (13.7) | .030 (.76) | .090 (2.29) |
| 8205 | | 10 | .33 (8.4) | .70 (17.8) | .54 (13.7) | | |
| 8206 | | 6 | .28 (7.1) | .68 (17.3) | .54 (13.7) | | |
| 8207 | 12/10 | 8 | .38 (9.7) | .73 (18.5) | .54 (13.7) | .040 (1.02) | .135 (3.4) |
| 8208 | | 10 | .38 (9.7) | .73 (18.5) | .54 (13.7) | | |

RING TONGUE INSULATED



| CAT. NO. | WIRE RANGE (AWG) | FOR STUD SIZE | W | L | E | MATL THICK | BARREL .250 (6.4) LONG I.D. | MAX. INSUL. DIA. |
|----------|------------------|---------------|-----------|-------------|------------|-------------|-----------------------------|------------------|
| 8209 | | 6 | .25 (6.4) | .80 (20.3) | .67 (17.0) | | | |
| 8210 | 22/18 (Red) | 8 | .33 (8.4) | .90 (22.9) | .74 (18.8) | .030 (.76) | .070 (1.78) | .145 (3.7) |
| 8211 | | 10 | .33 (8.4) | .90 (22.9) | .74 (18.8) | | | |
| 8212 | | 6 | .25 (6.4) | .80 (20.3) | .67 (17.0) | | | |
| 8213 | 16/14 (Blue) | 8 | .33 (8.4) | .90 (22.9) | .74 (18.8) | .030 (.76) | .090 (2.29) | .170 (4.3) |
| 8214 | | 10 | .33 (8.4) | .90 (22.9) | .74 (18.8) | | | |
| 8215 | | 6 | .28 (7.1) | .98 (24.9) | .84 (21.3) | | | |
| 8216 | 12/10 (Yellow) | 8 | .38 (9.7) | 1.03 (26.2) | .84 (21.3) | .040 (1.02) | .135 (3.4) | .250 (6.4) |
| 8217 | | 10 | .38 (9.7) | 1.03 (26.2) | .84 (21.3) | | | |


BLOCK SPADE NON-INSULATED



Flanged

| CAT. NO. | WIRE RANGE (AWG) | FOR STUD SIZE | W | L | E | MATL THICK | BARREL I.D. | FLANGED CAT. NO. |
|----------|------------------|---------------|-----------|------------|------------|-------------|-------------|------------------|
| 8218 | | 6 | | | | | | 8236 |
| 8219 | 22/18 | 8 | .30 (.76) | .65 (16.5) | .50 (12.7) | .030 (.76) | .090 (2.29) | 8237 |
| 8220 | | 10 | | | | | | 8238 |
| 8221 | | 6 | | | | | | 8239 |
| 8222 | 16/14 | 8 | .30 (.76) | .65 (16.5) | .50 (12.7) | .030 (.76) | .090 (2.29) | 8240 |
| 8223 | | 10 | | | | | | 8241 |
| 8224 | | 6 | | | | | | 8242 |
| 8225 | 12/10 | 8 | .32 (8.1) | .73 (18.5) | .54 (13.7) | .040 (1.02) | .135 (3.4) | 8243 |
| 8226 | | 10 | | | | | | 8244 |


BLOCK SPADE INSULATED



Flanged



| CAT. NO. | WIRE RANGE (AWG) | FOR STUD SIZE | W | L | E | MATL THICK | BARREL .250 (6.4) LONG I.D. | MAX. INSUL. DIA. | FLANGED CAT. NO. |
|----------|------------------|---------------|-----------|-------------|------------|-------------|-----------------------------|------------------|------------------|
| 8227 | | 6 | | | | | | | 8245 |
| 8228 | 22/18 (Red) | 8 | .30 (.76) | .85 (21.6) | .70 (17.8) | .030 (.76) | .070 (1.78) | .145 (3.7) | 8246 |
| 8229 | | 10 | | | | | | | 8247 |
| 8230 | | 6 | | | | | | | 8248 |
| 8231 | 16/14 (Blue) | 8 | .30 (.76) | .85 (21.6) | .70 (17.8) | .030 (.76) | .090 (2.29) | .175 (4.4) | 8249 |
| 8232 | | 10 | | | | | | | 8250 |
| 8233 | | 6 | | | | | | | 8251 |
| 8234 | 12/10 (Yellow) | 8 | .32 (8.1) | 1.03 (26.2) | .84 (21.3) | .040 (1.02) | .135 (3.4) | .255 (6.5) | 8252 |
| — | | 10 | | | | | | | 8253 |

SNAP SPADE NON-INSULATED




| CAT. NO. | WIRE RANGE (AWG) | FOR STUD SIZE | W | L | E | MATL THICK | BARREL I.D. |
|----------|------------------|---------------|-----------|------------|------------|-------------|-------------|
| 8254 | | 6 | .25 (6.4) | | | | |
| 8255 | 22/18 | 8 | .30 (7.6) | .68 (17.3) | .50 (12.7) | .030 (.76) | .070 (1.78) |
| 8256 | | 10 | .32 (8.1) | | | | |
| 8257 | | 6 | .25 (6.4) | | | | |
| 8258 | 16/14 | 8 | .30 (7.6) | .68 (17.3) | .50 (12.7) | .030 (.76) | .090 (2.29) |
| 8259 | | 10 | .32 (8.1) | | | | |
| 8260 | | 6 | .28 (7.3) | | | | |
| 8261 | 12/10 | 8 | .32 (8.1) | .73 (18.5) | .53 (13.6) | .040 (1.02) | .135 (3.4) |
| 8262 | | 10 | .32 (8.1) | | | | |

SNAP SPADE INSULATED



| CAT. NO. | WIRE RANGE (AWG) | FOR STUD SIZE | W | L | E | MATL THICK | BARREL .250 (6.4) LONG I.D. | MAX. INSUL. DIA. |
|----------|------------------|---------------|-----------|-------------|------------|-------------|-----------------------------|------------------|
| 8263 | | 6 | .25 (6.4) | | | | | |
| 8264 | 22/18 (Red) | 8 | .30 (7.6) | .88 (22.4) | .70 (17.8) | .030 (.76) | .070 (1.78) | .145 (3.7) |
| 8265 | | 10 | .32 (8.1) | | | | | |
| 8266 | | 6 | .25 (6.4) | | | | | |
| 8267 | 16/14 (Blue) | 8 | .30 (7.6) | .88 (22.4) | .70 (17.8) | .030 (.76) | .090 (2.29) | .170 (4.3) |
| 8268 | | 10 | .32 (8.1) | | | | | |
| 8269 | | 6 | .28 (7.3) | | | | | |
| 8270 | 12/10 (Yellow) | 8 | .32 (8.1) | 1.03 (26.2) | .83 (21.2) | .040 (1.02) | .135 (3.4) | .250 (6.4) |
| 8271 | | 10 | .32 (8.1) | | | | | |

HAND CRIMP TOOL

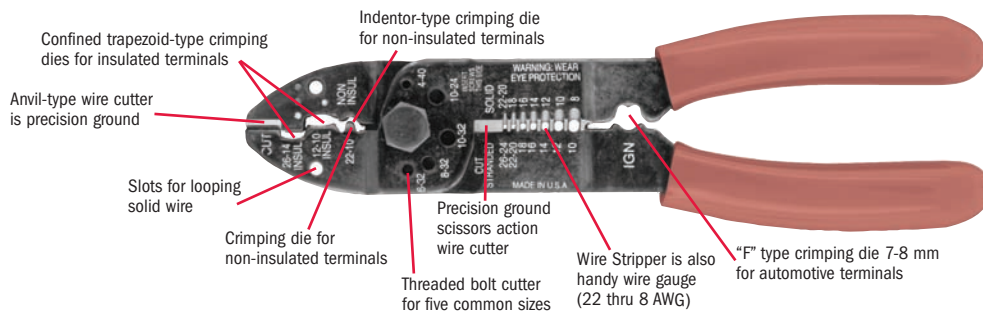

CAT. NO. 1345

Tel (718) 956-8900 • Fax (718) 956-9040
(800) 221-5510 • kec@keyelco.com

KEYSTONE
RoHS COMPLIANT ~ ISO 9001 CERTIFIED

www.keyelco.com
31-07 20th Road - Astoria, NY 11105-2017

SOLDERLESS TERMINALS