




Que-2-TXT™
Questions?
scan to text us fast



2PC MAGNETIC STRIPS RETROFIT KITS

2FT WITH FROSTED COVER



specifications

| Consumption | Voltage | CRI | Base | Lens | Heat Sink | L70 hours | Ambient Temp (F) | Power Factor | Mounting | THD | Beam Angle | Enclosed Fixture Rated |
|-----------------|-----------|-----|-----------|--------------------------------|-----------|-----------|------------------|--------------|--------------------------|------|------------|------------------------|
| 16W 2 strips | 100-277 V | 83 | hard-wire | polycarbonate Frosted Cover | aluminum | 50,000 | -4 - 104 ° | >0.9 | magnetic clips screws | <25% | 120° | yes |

*select your lamp


| Part Number | Color Temp | Dimmable | Efficacy | Lumens |
|--------------------|------------|----------|------------|--------|
| GI-22TRK-W32CD-UL4 | 3000K | 0-10 V | 132 lm / w | 2,112 |
| GI-22TRK-W32C-UL4 | 3500K | no | 132 lm / w | 2,112 |
| GI-22TRK-D32C-UL4 | 4000K | no | 132 lm / w | 2,112 |
| GI-22TRK-C32C-UL4 | 5000K | no | 132 lm / w | 2,112 |

other

| Dimensions | Warranty | Gross Weight | Case QTY |
|------------|----------|--------------|----------|
| 22" | 6 years | 8.7 KG | 30 pcs |

Driver Dimensions

3 3/4" (L) x 1" (W) x 1 1/4" (H)

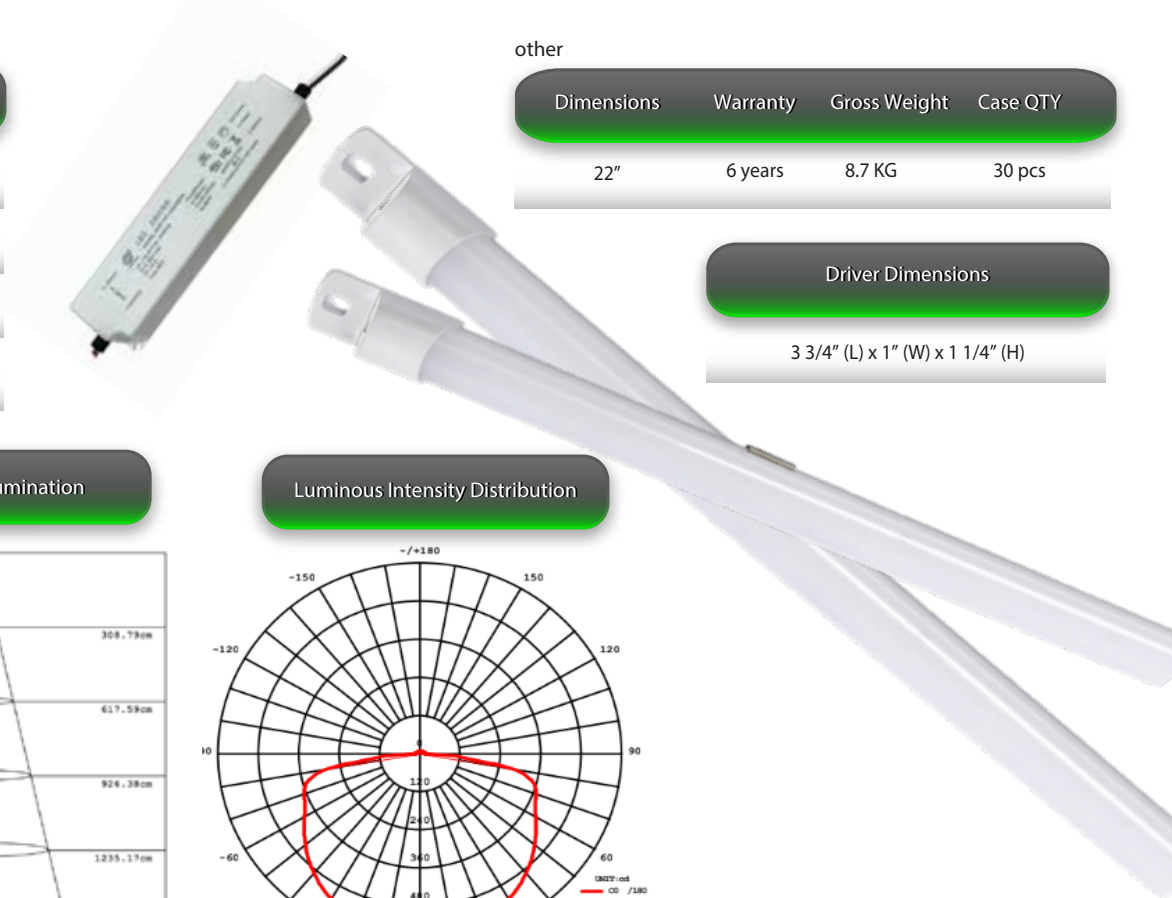


Features


- Does not need tombstones; hard-wired
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- External driver
- Can be installed using included screws or magnetic backing



Distance vs Illumination

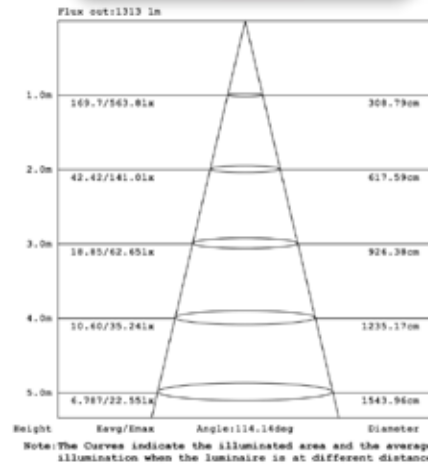

Luminous Intensity Distribution

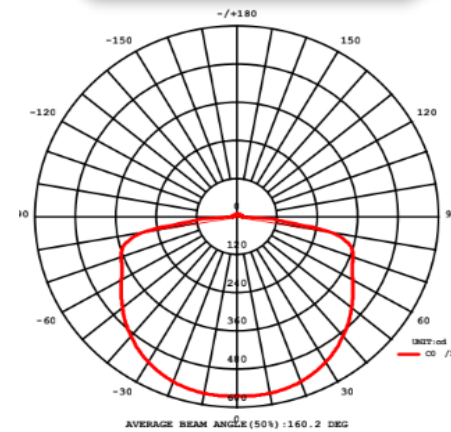

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779