MYC-YA15XC-T CPU Module

- > ST STM32MP1 MPU based on 650MHz Single or Dual Arm Cortex-A7 and 209MHz Cortex-M4 Cores
- 256MB/512MB DDR3L, 256MB Nand Flash/4GB eMMC Flash, 32KB EEPROM
- Power Management IC (PMIC)
- ➤ 1.0mm pitch 148-pin Stamp Hole Expansion Interface
- Supports Running Linux OS






Figure 1-1 MYC-YA15XC-T CPU Module (delivered with shielding cover by default)

Measuring only 39mm by 37mm, the MYC-YA15XC-T CPU Module is MYIR's another System-on Module (SoM) based on ST
STM32MP1 series processors after the first release of the MYC-YA157C CPU Module, The new MYC-Y157XC-T module has integrated the STM32MP151AAC3T processor by default and a dedicated Power Management IC
STPMIC1 also from STMicroelectronics. It has onboard DDR3L, Nand Flash or eMMC and 32KB EEPROM. A number of peripherals and IO signals are brought out through 1.0 mm pitch 148-pin stamp-hole (Castellated-Hole) expansion interface to make the module an excellent embedded controller for applications

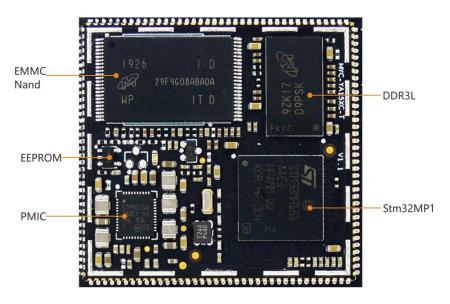


Figure 1-2 MYC-YA15XC-T CPU Module

like industrial control, consumer electronics, smart home, medical and etc. The <u>MYC-YA15XC-T</u> is running Linux with provided 5.4.31 kernel and many drivers in source code.

The <u>MYD-YA15XC-T development board</u> is designed based on the <u>MYC-YA15XC-T CPU Module</u> and has extended various peripherals to the base board through connectors including Debug serial port, USB Type-C DRP, USB2.0 HOST, Gigabit Ethernet, Micro SD Card Slot, LCD, Camera, etc. A number of IO signals are brought out through pin headers as well. The <u>MYD-YA15XC-T development board</u> is delivered with one Quick Start Guide, one USB Type-C cable, one DC power jack plug adapter and one 5V/2A power adapter to enable users to start

rapid development when getting the board out-of-box. MYIR also offers <u>MY-CAM011B Camera Module</u>, MY-RGB2HDMI Module, MY-WF005S WiFi/BT Module, MY-WIREDCOM RPI Module (RS232/RS485/CAN) and <u>MY-TFT070CV2 LCD Module</u> as options for the board.

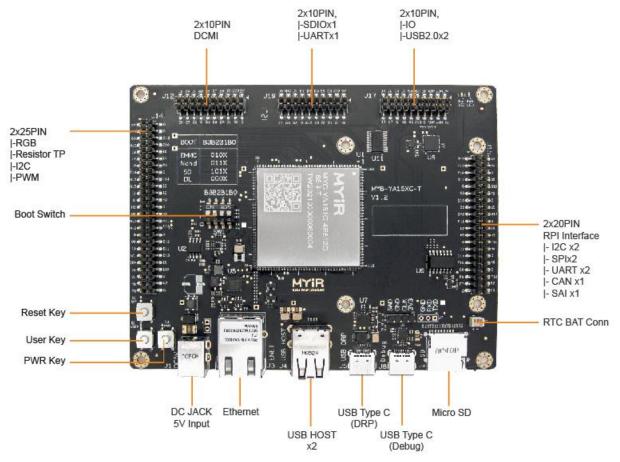


Figure 1-3 MYD-YA15XC-T Development Board Top-view

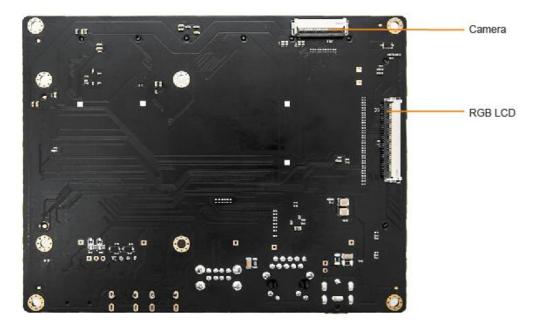


Figure 1-4 MYD-YA15XC-T Development Board Bottom-view

Hardware Specification

The MYC-YA15XC-T CPU Module is using STMicroelectronics <u>STM32MP151AAC3T</u> Microprocessor with 12 x 12 mm, 0.5 mm pitch, TFBGA361 package which is among the <u>STM32MP1 Series</u>. The STM32MP1 series is based on a heterogeneous single or dual Arm Cortex-A7 and Cortex-M4 cores architecture, strengthening its ability to support multiple and flexible applications, achieving the best performance and power figures at any time. The Cortex-A7 core provides access to open-source operating systems (Linux/Android) while the Cortex-M4 core leverages the STM32 MCU ecosystem. It is available in 3 different lines which are pin-to-pin compatible:

- <u>STM32MP157</u>: Dual Cortex-A7 cores @ 650 MHz, Cortex-M4 core @ 209 MHz, 3D GPU, DSI display interface and CAN FD
- STM32MP153: Dual Cortex-A7 cores @ 650 MHz, Cortex-M4 core @ 209 MHz and CAN FD
- <u>STM32MP151</u>: Single Cortex-A7 core @ 650 MHz, Cortex-M4 core @ 209 MHz Each line comes with a security option (cryptography & secure boot)

| ACCELERATION • Dual core Arm® Cortex®-A7 processor • L1 and L2 caches • 3D Graphic Processing Unit* • Floating Point Unit + Arm® Neon™ • Arm® Cortex®-M4 209 MHz | STM32 MP1 Product lines | Cortex®-A7 core | f _{oru} (MHz) | Cortex ^e -M4 core | f _{ecu} (MHz) | 30 GPU | f _{eru} (MHz) | HW Crypto | FD-CAN | MIPI*-DS |
|---|--------------------------|--------------------|---------------------------|---------------------------------|---------------------------|--------|---------------------------|--------------|--------|----------|
| Arm® Cortex®-M4 209 MHz coprocessor MDMA + DMA LPDDR2/LPDDR3 16/32**-bit 533 MHz DDR3/DDR3L 16/32**-bit 533 MHz CONNECTIVITY 2 x USB2.0 HS Host USB2.0 OTG FS/HS 3 x SDMMC/SDIO USART, UART, SPI, IPC 2 x (TT)FD-CAN2.0* | STM32MP151A | 1 | 650 | 1 | 209 | ¥. | 24 | 1841 | - 4 | 盟 |
| | STM32MP151C | | | | | | | 8.0 | | |
| | STM32MP153A | 2 | 650 | 1 | 209 | | 58 | • | 2 | 5. |
| | STM32MP153C | | | | | | | • | | |
| Gigabit Ethernet IEEE 1588*** FMC (NAND Rash) Camera VF | STM32MP157A | | 650 | | 209 | | 533 | | | |
| Dual mode Quad-SPI DSI 2 Gbit/s* | STM32MP157C | 2 | 650 | 1 | 203 | J | 533 | • | 2 | 1 |

Notes:

Figure 1-5 STM32MP1 Series Processors

^{*} Not available in all product lines

^{** 16/32-}bit for LFBGA448 and TFBGA361 packages, 16-bit only for LFBGA354 and TFBGA257 packages

^{*** 10/100}M Ethernet only for LFBGA354 and TFBGA257 packages

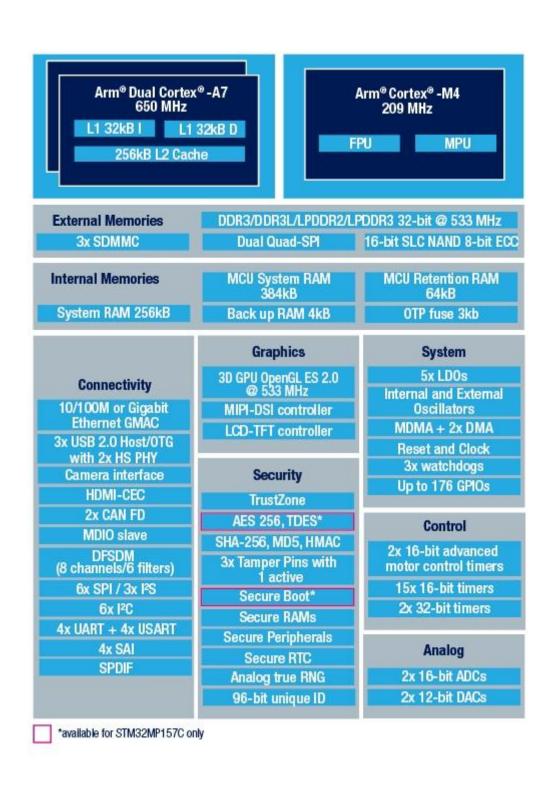


Figure 1-6 STM32MP15X Block Diagram



Mechanical Parameters

Dimensions: 39mm x 37mm
PCB Layers: 10-layer design
Power supply: +5V/0.5A

• Working temperature: 0~70 Celsius (commercial grade) or 40~85 Celsius (industrial grade)

Processor

 650MHz STMicroelectronics STM32MP151AAC3T Microprocessor (STM32MP153AAC3T and STM32MP157AAC3T are compatible and can be customized)

The STM32MP1 series is available in 3 different lines which are pin-to-pin compatible:

- STM32MP151: Single Cortex-A7 core up to @ 800 MHz, Cortex-M4 core @ 209 MHz
- STM32MP153: Dual Cortex-A7 cores up to @ 800 MHz, Cortex-M4 core @ 209 MHz and CAN FD
- STM32MP157: Dual Cortex-A7 cores up to @ 800 MHz, Cortex-M4 core @ 209 MHz, 3D GPU, DSI display interface and CAN FD

Memory and Storage

- 256MB DDR3L, 256MB Nand Flash / 512MB DDR3L, 4GB eMMC Flash
- 32KB EEPROM

Peripherals and Signals Routed to Pins

- Power Management IC (STPMIC1APQR)
- 1.0mm pitch 148-pin Stamp Hole Expansion Interface
 - 8 x Serial ports
 - 5 x I2C
 - 4 x SPI
 - 16 x ADC
 - 2 x SDIO
 - 1 x RGMII
 - 2 x USB Host or 1 x USB Host plus 1 x USB OTG
 - 2 x CAN (only for STM32MP153 and STM32MP157)
 - 5 x LPTIM and 10 TIM
 - 1 x RGB Interface (supports 16-/18-/24-bit, resolution up to 1366 x 768 @60fps)
 - Up to 109 GPIOs

Note: the peripheral signals brought out to the expansion interface are listed in maximum number. Some signals are reused. Please refer to the processor datasheet and the CPU Module pinout description file.

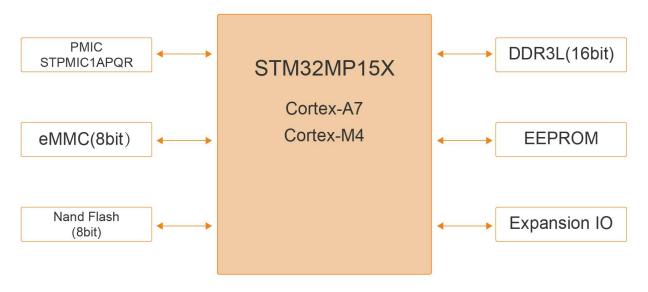


Figure 1-7 MYC-YA15XC-T CPU Module Function Block Diagram

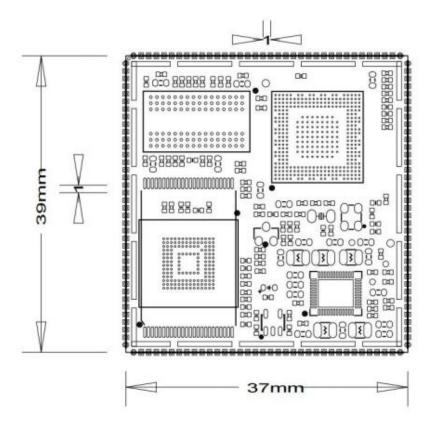


Figure 1-8 MYC-YA15XC-T Dimensions Chart



Software Features

| Item | Features | Description | Source Code |
|---------------------|---------------------|---|-------------|
| Bootstrap program | TF-A-2.2 | Arm Trusted Firmware | YES |
| Bootloader | U-boot-2020.01 | Kernel bootstrap | YES |
| Linux kernel | Linux-5.4.31 | Customized based on ST kernel_5.4.31 version for MYD-YA15XC-T | |
| | NAND | Nand Flash driver | YES |
| | MMC | eMMC driver | YES |
| | USB Host | USB Host driver | YES |
| | USB OTG | USB OTG driver | YES |
| | I2C | I2C driver | YES |
| | SPI | SPI driver | YES |
| Drivers | Ethernet | 10M/100M/1000M Ethernet driver | YES |
| | RS232/RS485/Uart | Serial driver | YES |
| | LCD | LCD driver, supports MYIR's 7-inch LCD with 800 x 480 pixels resolution | YES |
| | Touch | Capacitive touch screen driver | YES |
| | RTC | RTC driver | |
| | GPIO key | Key driver | YES |
| | GPIO LED | LED driver | YES |
| | CAN | CAN Bus driver | |
| | HDMI | HDMI driver | YES |
| | WiFi & BT | WiFi/BT driver (SDIO) | YES |
| 70 | myir-image-full | Full-featured file system with MEasy HMI V2.0 | YES |
| File system | myir-image-core | Simplified system with core features | YES |
| Tools | STM32CubeProgrammer | ST programmer software | BIN |
| | STM32CubeMX | ST configuration integration tool | BIN |
| | STM32CubeIDE | ST development tool | BIN |
| | GPIO LED | LED example | YES |
| | GPIO KEY | KEY example | YES |
| | NET | TCP/IP Socket C/S example | YES |
| Applications | RTC | RTC example | YES |
| | RS232 | RS232 example | YES |
| | RS485 | RS485 example | YES |
| | CAN | CAN example | YES |
| | LCD | LCD Display example | YES |
| | Camera | Camera Display example | YES |
| | UART | UART example | YES |
| | HMI 2,0 | MYiR-MEasy_hmi 2.0 | YES |
| Compiler Tool Chain | Cross compiler | arm-ostl-linux-gnueabi-gcc 9.3.0 | BINARY |
| Yocto Project™ | Yocto | Dunfell 3.1 | YES |

Table 1-1 MYD-YA157C Software Features



Order Information

| Product Item | Part No. | Packing List | | | | |
|-----------------------------------|----------------------------|--------------------------------------|--|--|--|--|
| | MYC-YA151C-4E512D-65-C-T | > One MYC-YA15XC-T CPU Module | | | | |
| MYC-YA15XC-T CPU Module | MYC-YA151C-4E512D-65-I-T | | | | | |
| | MYC-YA151C-256N256D-65-C-T | | | | | |
| | MYC-YA151C-256N256D-65-I-T | | | | | |
| MYD-YA15XC-T Development Board | | > One MYD-YA15XC-T Development Board | | | | |
| | MYD-YA151C-256N256D-65-I-T | (including MYC-YA15XC-T CPU Module) | | | | |
| | | > One 5V/2A Power adapter | | | | |
| | MYD-YA151C-4E512D-65-I-T | ➤ One USB Type-C cable | | | | |
| | | > One DC power jack plug adapter | | | | |
| | | > One Quick Start Guide | | | | |
| MY-LCD70TP-C LCD Module | | Add-on Options | | | | |
| (with capacitive touch screen) | MY-TFT070CV2 | > MY-TFT070CV2 LCD Module | | | | |
| MY-RGB2HDMI | MY DCDOUDMI | ➤ MY-RGB2HDMI Module | | | | |
| RGB to HDMI Module | MY-RGB2HDMI | > MY-WIREDCOM RPI Module | | | | |
| MY-WIREDCOM RPI Module | MY-WIREDCOM | > MY-WF005S WiFi/BT Module | | | | |
| (RS232/RS485/CAN) | MIT-WIKEDGOM | > MY-CAM011B Camera Module | | | | |
| MY-WF005S WiFi/BT Module | MY-WF005S | | | | | |
| MY-CAM011B Camera Module | MY-CAM011B | | | | | |



MYIR Tech Limited

Room 04, 6th Floor, Building No.2, Fada Road, Yunli Smart Park, Bantian, Longgang District, Shenzhen, Guangdong, China 518129

E-mail: sales@myirtech.com Phone: +86-755-22984836 Fax: +86-755-25532724

Website: http://www.myirtech.com