



# 3

YEARS  
WARRANTY

ROHS  
COMPLIANT

REACH  
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway



NON  
-isolation

LOW  
Standby  
Power

NO  
Min. Load  
Required

OCP

OTP

SCP

### PART NUMBER STRUCTURE

PSR02 -

12

S

05

-

HS

Series Name

Input  
Voltage  
(VDC)

Output  
Quantity

Output  
Voltage  
(VDC)

Heat-sink  
Options

05:3.0~5.5  
12:4.6~36  
24:12~36  
\* See table as below

S:Single

1P2:1.2  
1P5:1.5  
1P8:1.8  
2P5:2.5  
3P3:3.3  
05:5  
6P5:6.5  
09:9  
12:12  
15:15

□: No Heat-sink  
HS: Heat-sink

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load A	Input Current @ No Load mA	Efficiency		Maximum Capacitor Load μF
					Min. Vin %	Max. Vin %	
PSR02-05S1P2	3.0 ~ 5.5	1.2	2	1	90	86	2500
PSR02-05S1P5	3.0 ~ 5.5	1.5			2000		
PSR02-05S1P8	3.0 ~ 5.5	1.8			1600		
PSR02-05S2P5	3.8 ~ 5.5	2.5			1200		
PSR02-12S1P2	4.6 ~ 36	1.2			2500		
PSR02-12S1P5	4.6 ~ 36	1.5			2000		
PSR02-12S1P8	4.6 ~ 36	1.8			1600		
PSR02-12S2P5	4.6 ~ 36	2.5			1200		
PSR02-12S3P3	4.75 ~ 36	3.3			900		
PSR02-12S05	6.5 ~ 36	5.0			600		
PSR02-12S6P5	9.0 ~ 36	6.5			470		
PSR02-24S09	12 ~ 36	9.0			330		
PSR02-24S12	15 ~ 36	12			270		
PSR02-24S15	18 ~ 36	15			200		

**INPUT SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	PSR02-05S1P2	3.0	5.0	5.5	VDC
	PSR02-05S1P5	3.0	5.0	5.5	
	PSR02-05S1P8	3.0	5.0	5.5	
	PSR02-05S2P5	3.8	5.0	5.5	
	PSR02-12S1P2	4.6	12	36	
	PSR02-12S1P5	4.6	12	36	
	PSR02-12S1P8	4.6	12	36	
	PSR02-12S2P5	4.6	12	36	
	PSR02-12S3P3	4.75	12	36	
	PSR02-12S05	6.5	12	36	
	PSR02-12S6P5	9.0	12	36	
	PSR02-24S09	12	24	36	
	PSR02-24S12	15	24	36	
	PSR02-24S15	18	24	36	
	For PSR02-12S□□ and PSR02-24S□□, only if the input will be switched electromechanically, the input should install an external 22μF/50V E/C.				
Start up time	Constant resistive load	Power up		5	ms
Input filter					Capacitor type


OUTPUT SPECIFICATIONS						
Parameter	Conditions			Min.	Typ.	Max. Unit
Voltage accuracy				-2.0		+2.0 %
Line regulation	Low Line to High Line at Full Load			-0.5		+0.5 %
Load regulation	No Load to Full Load			-1.0		+1.0 %
Ripple and noise	Measured by 20MHz bandwidth				50 75	mVp-p
			Vout ≤ 6.5V Vout ≥ 9.0V			
Temperature coefficient				-0.02		+0.02 %/°C
Dynamic load response	50% load step change	Peak deviation	24S□□		300	500 mV
			Others		150	250 mV
		Recovery time	All		100	200 μs
Over load protection	% of lout rated; Hiccup mode		05S□□		8	A
			Others		3.6	
Short circuit protection				Continuous, automatics recovery		

GENERAL SPECIFICATIONS						
Parameter	Conditions			Min.	Typ.	Max. Unit
Switching frequency	05S□□ Others				1200 410	kHz
Safety meets				IEC/ EN/ UL62368-1		
Case material				Non-conducted black plastic		
Potting material				Silicone (UL94 V-0)		
Weight				2.6g(0.092oz)		
MTBF	MIL-HDBK-217F, Full load			1.352x10 <sup>7</sup> hrs		


ENVIRONMENTAL SPECIFICATIONS						
Parameter	Conditions			Min.	Typ.	Max. Unit
Operating ambient temperature	With derating			-40		+100 °C
	* For high output power of PSR02-24S□□ has an optional heat-sink with suffix HS, which is able to be operated at least 50°C ambient temperature without derating when applied input voltage doesn't exceed 30V. Other models can meet this condition without heat-sink, and can install the heat-sink for higher operating ambient temperature as well.					
Maximum case temperature						105 °C
Over temperature protection	Internal IC junction				150	°C
Storage temperature range				-55		+125 °C
Thermal shock				MIL-STD-810F		
Vibration				MIL-STD-810F		
Relative humidity				5% to 95% RH		

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.


**CHARACTERISTIC CURVE**

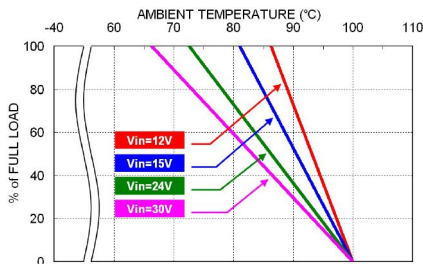


PSR02-12S05 Derating Curve

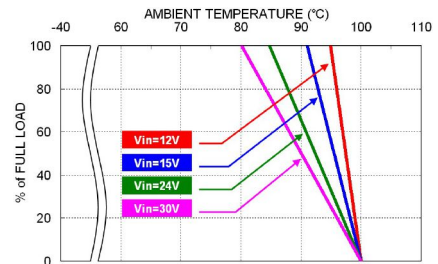


PSR02-12S05-HS Derating Curve

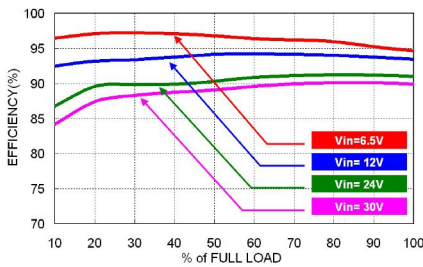


PSR02-12S05 Efficiency vs. Output Load

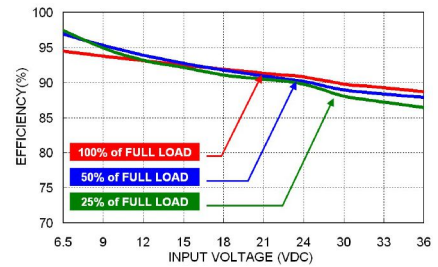


PSR02-12S05 Efficiency vs. Input Voltage

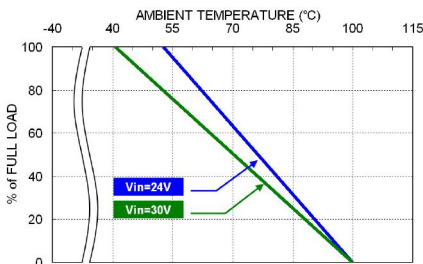


PSR02-24S15 Derating Curve

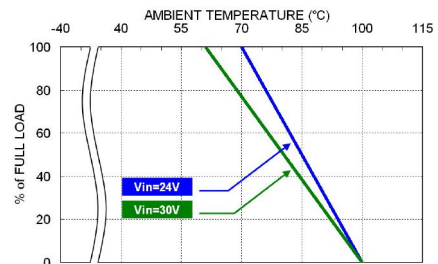

PSR02-24S15-HS Derating Curve

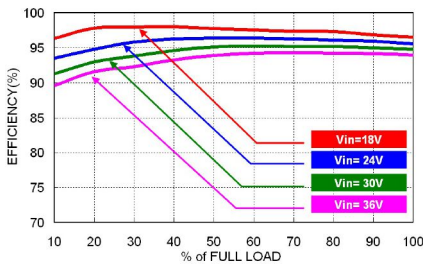

PSR02-24S15 Efficiency vs. Output Load

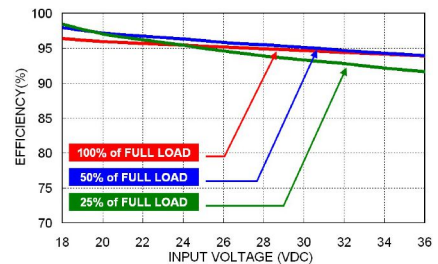

PSR02-24S15 Efficiency vs. Input Voltage

## FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
PSR02-05S□□	2	Slow-Blow
PSR02-12S1P2、12S1P5、12S1P8	1.6	Slow-Blow
PSR02-12S2P5、12S3P3、12S05、12S6P5	2.5	Slow-Blow
PSR02-24S□□	3.15	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

## MECHANICAL DRAWING

PSR02-□□S□□

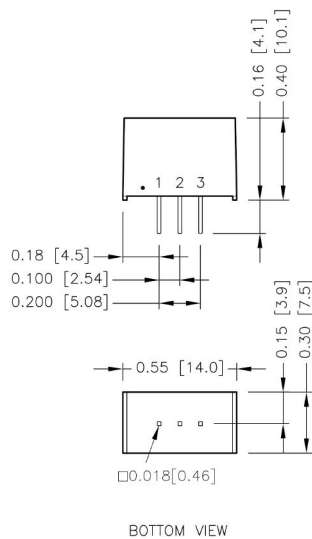


### PIN CONNECTION

PIN	DEFINE
1	+Vin
2	GND
3	+Vout

- All dimensions in inch [mm]
- Tolerance : x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]
- Pin dimension tolerance ±0.004[0.10]

**MECHANICAL DRAWING(CONTINUED)**

PSR02-□□S□□-HS

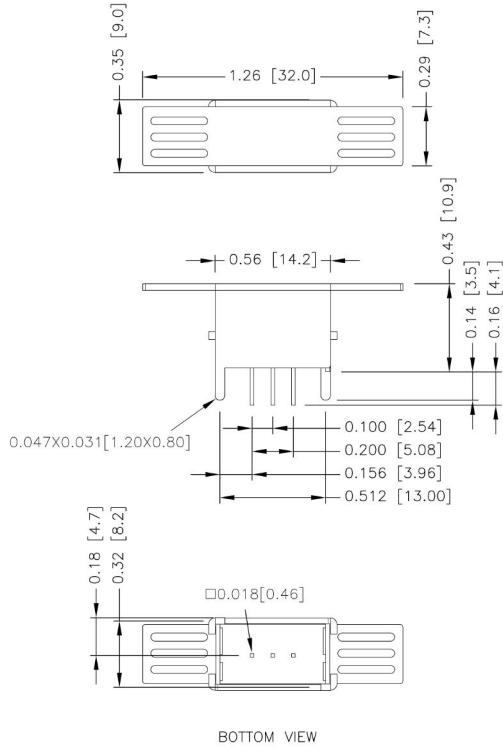


**PIN CONNECTION**

PIN	DEFINE
1	+Vin
2	GND
3	+Vout
4	Case
5	Case

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]
4. Pin dimension tolerance ±0.004[0.10]


**RECOMMENDED PAD LAYOUT**

PSR02-□□S□□



All dimensions in inch[mm]  
Pad size[lead free recommended]  
Through hole1.2.3.: Φ0.035[0.90]  
Top view pad1.2.3: Φ0.044[1.13]  
Bottom view pad1.2.3: Φ0.071[1.80]

PSR02-□□S□□-HS

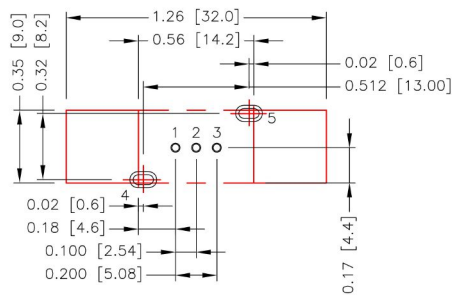

All dimensions in inch[mm]  
Pad size[lead free recommended]  
Through hole1.2.3.: Φ0.035[0.90]  
Through hole4.5:0.098x0.047[2.50x1.20]  
Top view pad1.2.3: Φ0.044[1.13]  
Top view pad4.5:0.130x0.079[3.30x2.00]  
Bottom view pad1.2.3: Φ0.071[1.80]  
Top view pad4.5:0.130x0.079[3.30x2.00]


## THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed 100°C.

When Operating, adequate cooling must be provided to maintain the test point temperature at or below 100°C.

Although the maximum point Temperature of the power modules is 100°C, you can limit this Temperature to a lower value for extremely high reliability. The unit will shutdown if the internal IC junction exceeds 150°C (typical), but the thermal shutdown is not intended as a guarantee that the unit will survive temperature beyond its rating. The module will automatically restarts after it cools down.

- Thermal test condition with vertical direction by natural convection (20LFM) and mounted on a 30x30mm PCB with 1oz copper and 0.8mm thickness.



TOP VIEW

