
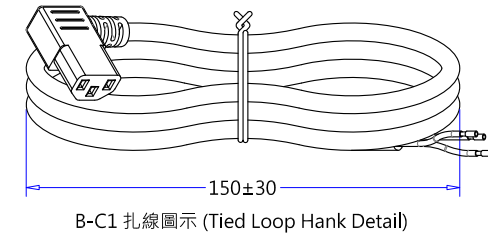
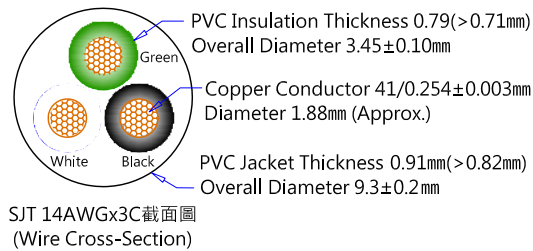
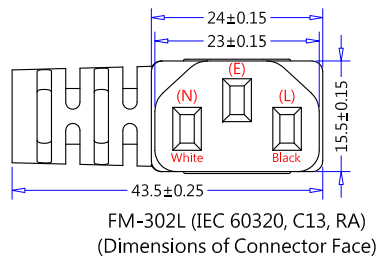


插頭部件 (Plug Component)			頭部剥皮尺寸 (Dimensions)			線材規格 (Wire Styles)		尾部剥皮尺寸 (Dimensions)			端子規格 (Terminal Style)	
顏色(Color)	零件描述(Component)	Qty.	內剥(Strip)	外剥(ROJ)	顏色(Color)	SJT 14AWGx3C 105°C 黑色 (Black) Length : 1500±50 (59.1"±2")	外剥(ROJ)	內剥(Strip)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)	
35P 黑色 (Black)	FM-302L (IEC 60320, C13)	1	6 <sup>+1</sup> <sub>-0</sub>	18 ± 2	黑/Black(L)		50.8±5	6.35±3	黑/Black(L)	絕緣依尺寸剝除, 留膠於線上 (Strip and Retain Outside Insulated)		
銅本色 (Brass-Natural)	2.0*4.0 方管端子(GEM 98752A-0) (2.0*4.0 Receptacle Terminal)	3	6 <sup>+1</sup> <sub>-0</sub>	18 ± 2	白/White(N)		50.8±5	6.35±3	白/White(N)	絕緣依尺寸剝除, 留膠於線上 (Strip and Retain Outside Insulated)		
米白色 (Off-White)	GA005-5 品字母插兩件式內模 (Computer 2x4 Serial Housing)	1	6 <sup>+1</sup> <sub>-0</sub>	18 ± 2	綠/Green(E)	50.8±5	6.35±3	綠/Green(E)	絕緣依尺寸剝除, 留膠於線上 (Strip and Retain Outside Insulated)			

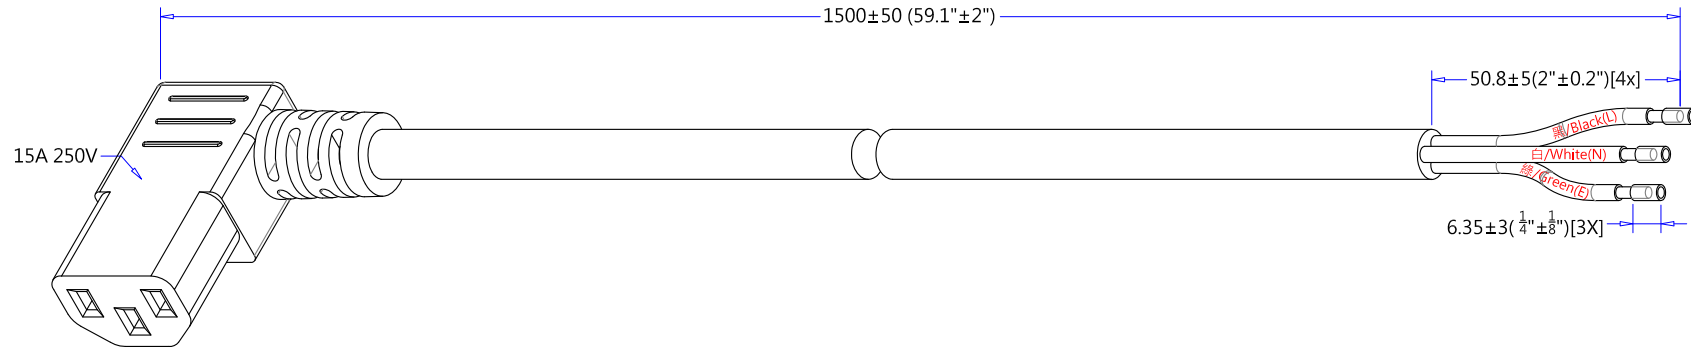

REV	DATE	REVISE CONTENT
A	08/29-2012	The first edition is issued and drawing.
F		

- NOTE:**
- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
  - Insulation Resistance Test : DC 500/min >100 meg-ohm.
  - Continuity & Polarization Test : No short circuit, break circuit, displacement.
  - Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
  - Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
  - All material according to Non-toxic standard.(Material must be RoHS compliant.)
  - "FMC" logo maybe present on C13.

線材印字 (Wire Printed)		充實, 油墨印字 (Un-Fillers, Printing Ink)		<b>CnC Tech, LLC</b> Industrial Cable and Connector Technology			
包裝方式 (Packing)		DRAWN					
Tied Hank	See Hank Detail	Chu8.		CUSTOMER	CnC		
Carton Size	480 x 320 x 230	DATE		P/N No.	800-1403-2-SJT0-BL-00150		
Pack Number	80pcs/ <small>UL Laster Labels</small>	08/29-2012		MATERIAL	PVC	UNIT	mm
Carton Print	See Purchase Order	TYPE		IEC 60320, C13 RA to ROJ(S&R) Power Supply Cord			
DRAWING NO.	098MM991	REV	A	Customer Approval			

業務校閱： 品質校閱：