



P-DUKE POWER

SDS05 · SDH05 Series


DC-DC Converter
Up to 5.04 Watts

3

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

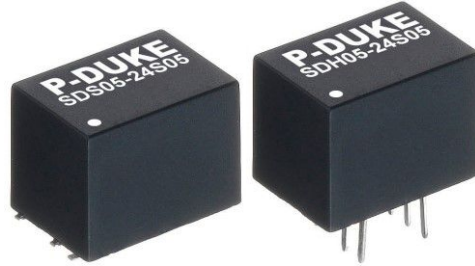

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

CE UK
CA

3000
VDC
Isolation
Voltage

1600
VDC
Isolation
Voltage

2 : 1
Input
Range

NO
Min. Load
Required

REMOTE
ON
OFF

SCP



PART NUMBER STRUCTURE

SDS05 - 48 S 05 H

Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Isolation Options
SDS: SMD type SDH: DIP type	05:4.5~13.2 12:9~18 24:18~36 48:36~75	S: Single D: Dual	3P3:3.3 05:5 09:9 12:12 15:15 24:24 05:±5 12:±12 15:±15	□: Standard type 1600VDC isolation H: 3000VDC isolation

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	µF
SDS(H)05-05S3P3	4.5 ~ 13.2	3.3	1000	50	76	4400
SDS(H)05-05S05	4.5 ~ 13.2	5	1000	60	80	2200
SDS(H)05-05S09	4.5 ~ 13.2	9	555	70	81	1470
SDS(H)05-05S12	4.5 ~ 13.2	12	420	70	83	1220
SDS(H)05-05S15	4.5 ~ 13.2	15	333	75	83	1000
SDS(H)05-05S24	4.5 ~ 13.2	24	210	90	83	470
SDS(H)05-05D05	4.5 ~ 13.2	±5	±500	70	80	±1000
SDS(H)05-05D12	4.5 ~ 13.2	±12	±210	90	83	±680
SDS(H)05-05D15	4.5 ~ 13.2	±15	±168	90	83	±440
SDS(H)05-12S3P3	9 ~ 18	3.3	1000	25	76	4400
SDS(H)05-12S05	9 ~ 18	5	1000	30	81	2200
SDS(H)05-12S09	9 ~ 18	9	555	35	82	1470
SDS(H)05-12S12	9 ~ 18	12	420	35	84	1220
SDS(H)05-12S15	9 ~ 18	15	333	35	85	1000
SDS(H)05-12S24	9 ~ 18	24	210	35	84	470
SDS(H)05-12D05	9 ~ 18	±5	±500	35	81	±1000
SDS(H)05-12D12	9 ~ 18	±12	±210	35	84	±680
SDS(H)05-12D15	9 ~ 18	±15	±168	40	85	±440
SDS(H)05-24S3P3	18 ~ 36	3.3	1000	15	77	4400
SDS(H)05-24S05	18 ~ 36	5	1000	15	81	2200
SDS(H)05-24S09	18 ~ 36	9	555	15	82	1470
SDS(H)05-24S12	18 ~ 36	12	420	15	84	1220
SDS(H)05-24S15	18 ~ 36	15	333	15	86	1000
SDS(H)05-24S24	18 ~ 36	24	210	20	84	470
SDS(H)05-24D05	18 ~ 36	±5	±500	20	82	±1000
SDS(H)05-24D12	18 ~ 36	±12	±210	20	84	±680
SDS(H)05-24D15	18 ~ 36	±15	±168	20	85	±440
SDS(H)05-48S3P3	36 ~ 75	3.3	1000	10	77	4400
SDS(H)05-48S05	36 ~ 75	5	1000	12	81	2200
SDS(H)05-48S09	36 ~ 75	9	555	12	82	1470
SDS(H)05-48S12	36 ~ 75	12	420	12	85	1220
SDS(H)05-48S15	36 ~ 75	15	333	12	85	1000
SDS(H)05-48S24	36 ~ 75	24	210	12	84	470
SDS(H)05-48D05	36 ~ 75	±5	±500	12	82	±1000
SDS(H)05-48D12	36 ~ 75	±12	±210	12	84	±680
SDS(H)05-48D15	36 ~ 75	±15	±168	12	85	±440

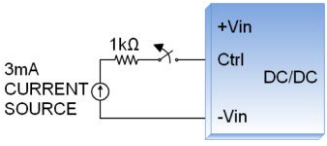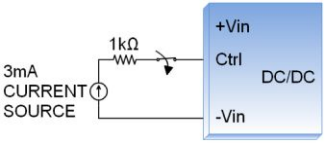INPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	05Vin(nom)		4.5	5	13.2	VDC
	12Vin(nom)		9	12	18	
	24Vin(nom)		18	24	36	
	48Vin(nom)		36	48	75	
Start up time	Constant resistive load	Power up		10	20	ms
		Remote ON/OFF		10	20	
Input surge voltage	1 second, max.	05Vin(nom)			15	VDC
		12Vin(nom)			25	
		24Vin(nom)			50	
		48Vin(nom)			100	
Input reflected ripple current	With external components	05Vin(nom)		40		mAp-p
		12Vin(nom)		30		
		24Vin(nom)		20		
		48Vin(nom)		15		
Input filter	Capacitor type					
Remote ON/OFF	Ctrl pin applied current via 1kΩ	DC-DC ON	Open or high impedance			mA
		DC-DC OFF	2.0	3.0	4.0	
		Remote off input current			2.5	mA
	Application circuit	DC-DC ON				
		DC-DC OFF				
						
						

OUTPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.2		+0.2	%
Load regulation	No Load to Full Load	Single	-1.0		+1.0	%
		Dual	-1.0		+1.0	
	10% Load to 90% Load	Single	-0.5		+0.5	%
		Dual	-0.8		+0.8	
Cross regulation	Asymmetrical load 25%/100% FL		-5.0		+5.0	%
Ripple and noise	Measured by 20MHz bandwidth			50		mVp-p
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			500		μs
Short circuit protection						Continuous, automatics recovery

GENERAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Standard	1600			VDC
		Suffix "H"	3000			
Isolation resistance	500VDC		1			GΩ
Isolation capacitance	Standard				50	pF
					Suffix "H"	
Switching frequency			100			kHz
Safety meets						IEC/ EN/ UL62368-1
Case material						Non-conductive black plastic
Base material						Non-conductive black plastic
Potting material						Silicone (UL94 V-0)
Weight						2.7g (0.10oz)
MTBF	MIL-HDBK-217F, Full load					2.959 x 10 ⁶ hrs


ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+105	°C
Maximum case temperature				105	°C
Storage temperature range		-55		+125	°C
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH
Lead-free reflow solder process	Only for SMD type				IPC J-STD-020E
Moisture sensitivity level(MSL)	Only for SMD type				IPC J-STD-033C Level 2


EMC SPECIFICATIONS

Parameter	Conditions	Level
EMI	EN55032 With external components	Class A, Class B
EMS	EN55035	
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge	EN61000-4-5 ± 1kV With an external input filter capacitor (Nippon chemi-con KY series, 220 µF/100V.) With an external input filter capacitor (Nippon chemi-con KY series, 220 µF/100V.)	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A


CAUTION: This power module is not internally fused. An input line fuse must always be used.

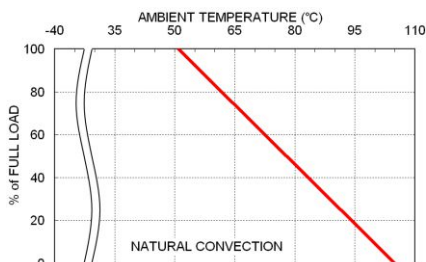CHARACTERISTIC CURVE


SDS(H)05-48S05 Derating Curve

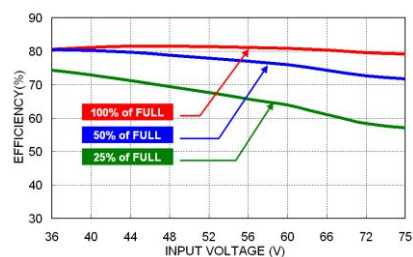

SDS(H)05-48S05 Efficiency vs. Input Voltage

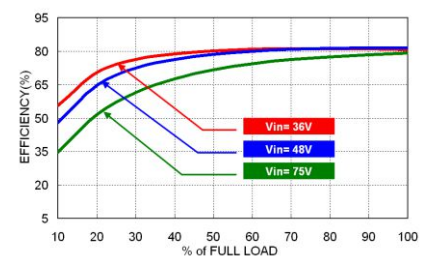

SDS(H)05-48S05 Efficiency vs. Output Current

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Modules	Fuse Rating (A)	Fuse Type
SDS(H)05-05S□□ \ SDS(H)05-05D□□	2.5	Slow-Blow
SDS(H)05-12S□□ \ SDS(H)05-12D□□	1.25	Slow-Blow
SDS(H)05-24S□□ \ SDS(H)05-24D□□	0.63	Slow-Blow
SDS(H)05-48S□□ \ SDS(H)05-48D□□	0.315	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin..

MECHANICAL DRAWING

SDS05: SMD TYPE

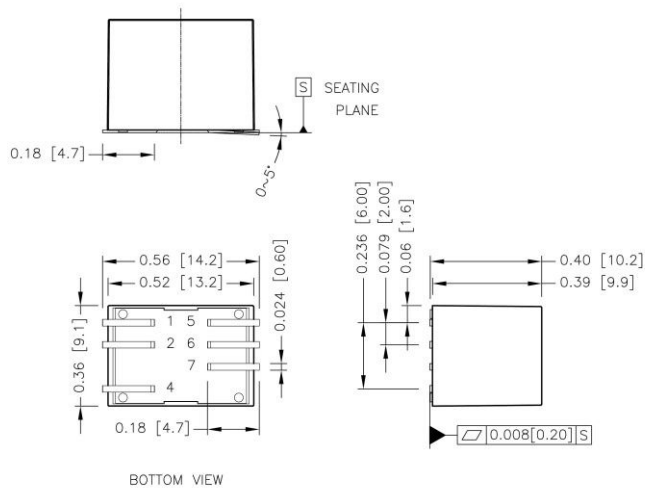


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
4	Ctrl	Ctrl
5	NC	-Vout
6	-Vout	Common
7	+Vout	+Vout


1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]
4. Pin dimension tolerance ±0.004[0.10]

SDH05: DIP TYPE

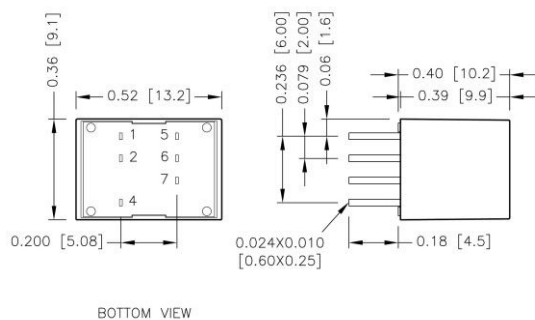


RECOMMENDED PAD LAYOUT

SMD TYPE

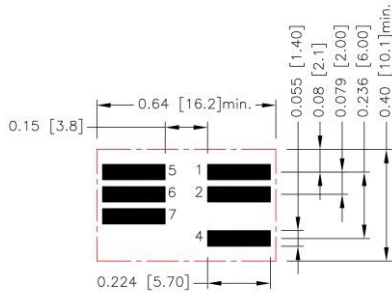

All dimensions in inch[mm]
Pad size(lead free recommended)
Top view pad:0.224x0.055[5.70x1.40]

DIP TYPE

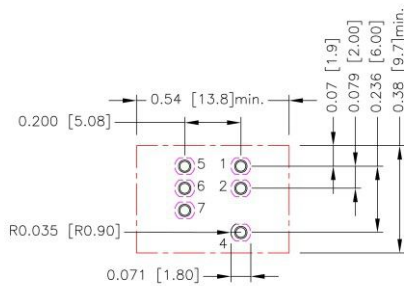

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.4.5.6.7: $\varnothing 0.035$ [0.90]
Top view pad 1.2.4.5.6.7: $\varnothing 0.044$ [1.13]
Bottom view pad 1.2.4.5.6.7:
Groove R0.035[0.90]L-0.071[1.80]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.


Heat is removed by conduction, convection, and radiation to the surrounding environment.

Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".


When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".

You can limit this temperature to a lower value for extremely high reliability.

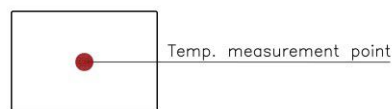

TOP VIEW

LEAD FREE REFLOW PROFILE For SMD Type

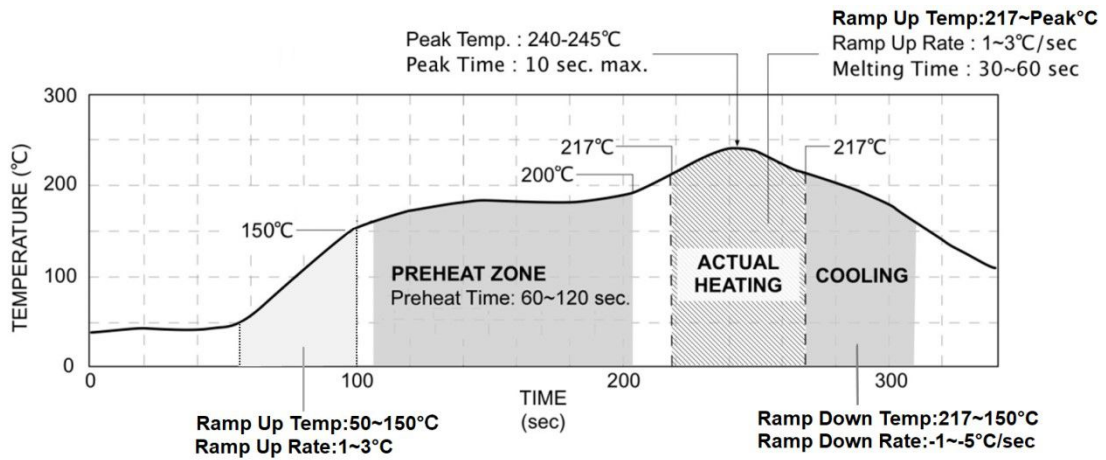

*The curves define the maximum peak reflow temperature permissible measured on pin1 or Vin pin.